

# Product data sheet

## Characteristics

# 8910DPA12V02

Contactor, Definite Purpose, 20A, 2 pole, 3 HP at 230 VAC, 1 phase, 110/120 VAC 50/60 Hz coil, open



Product availability: Stock - Normally stocked in distribution facility

Price\*: 68.25 USD



## Commercial status

This Product is Obsolete : FEB 17, 2021

⚠ This Product is Obsolete

## Main

Product or component type	Definite Purpose Contactor
Line Rated Current	20 A
Poles description	2P
Pole contact composition	2 NO
Range of product	DPA

## Complementary

Maximum Horse Power Rating	3 Hp 230 V AC, 1 phase 1.5 Hp 115 V AC, 1 phase
Locked rotor rated current	100 A 460 V AC 80 A 575 V AC 120 A 277 V AC
[Ue] rated operational voltage	600 V AC
[Uc] control circuit voltage	120 V AC 60 Hz 110 V AC 50 Hz
Phase	1 phase
Electrical connection	Quick connect terminals Binder head

## Environment

Product certifications	UL Recognized CSA
------------------------	----------------------

## Ordering and shipping details

Category	21341 - 8910 DPA 1_(20 AMP)
Discount Schedule	CP1B
GTIN	00785901116950
Nbr. of units in pkg.	1
Package weight(Lbs)	15.84 Oz (449.056 g)
Returnability	No
Country of origin	CN

## Packing Units

Unit Type of Package 1	PCE
Package 1 Height	3.10 In (7.874 cm)
Package 1 width	2.60 In (6.604 cm)
Package 1 Length	3.80 In (9.652 cm)


## Offer Sustainability

REACH Regulation	 <a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant  <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	 <a href="#">Yes</a>
China RoHS Regulation	 <a href="#">China RoHS Declaration</a>

## Contractual warranty

Warranty	18 months
----------	-----------

Approximate Dimensions

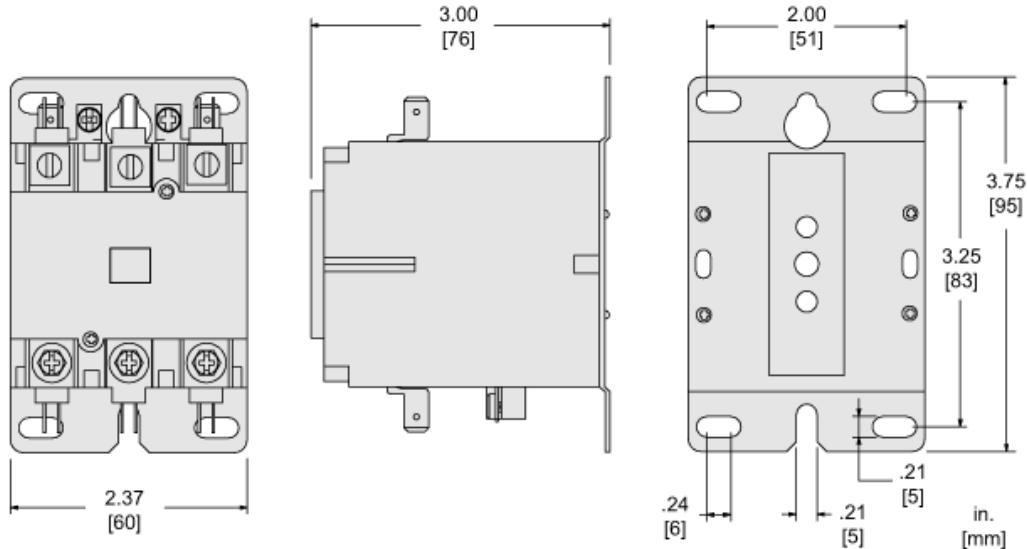

Product Life Status : **End of commercialisation**

8910DPA12V02 may be replaced by any of the following products:



**8910DPA32V02**

Contactor, Definite Purpose, 30A, 2 pole, 5 HP at 230 VAC, 1 phase, 110/120 VAC 50/60 Hz coil, open

Qty 1

Substitution date: |