

Product data sheet

Characteristics

8910DPA13V14

Contactor, Definite Purpose, 20A, 3 pole, 7.5 HP at 575 VAC, 3 phase, 24/24 VAC 50/60 Hz coil, open



Product availability: Stock - Normally stocked in distribution facility

Price*: 78.50 USD



Commercial status

This Product is Obsolete : JUL 09, 2021

This Product is Obsolete

Main

Product or component type	Definite Purpose Contactor
Line Rated Current	20 A
Poles description	3P
Pole contact composition	3 NO
Range of product	DPA

Complementary

Maximum Horse Power Rating	1.5 Hp 115 V AC, 1 phase 3 Hp 230 V AC, 1 phase 7.5 Hp 230 V AC, 3 phase 7.5 Hp 460 V AC, 3 phase 7.5 Hp 575 V AC, 3 phase
Locked rotor rated current	100 A 460 V AC 80 A 575 V AC 120 A 277 V AC
[Ue] rated operational voltage	600 V AC
[Uc] control circuit voltage	24 V AC 50/60 Hz
Phase	3 phase
Electrical connection	Binder head Quick connect terminals

Environment

Product certifications	UL Recognized CSA
------------------------	----------------------

Ordering and shipping details

Category	21341 - 8910 DPA 1_(20 AMP)
Discount Schedule	CP1B
GTIN	00785901080152
Nbr. of units in pkg.	1
Package weight(Lbs)	16.00 Oz (453.592 g)
Returnability	No
Country of origin	CN

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	3.20 In (8.128 cm)
Package 1 width	2.70 In (6.858 cm)
Package 1 Length	4.10 In (10.414 cm)
Unit Type of Package 2	CAR
Number of Units in Package 2	8
Package 2 Weight	8.81 Lb(US) (3.996 kg)
Package 2 Height	6.90 In (17.526 cm)
Package 2 width	5.50 In (13.97 cm)
Package 2 Length	8.50 In (21.59 cm)


Offer Sustainability

REACH Regulation	 REACH Declaration
EU RoHS Directive	Compliant  EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	 Yes
China RoHS Regulation	 China RoHS Declaration

Contractual warranty

Warranty	18 months
----------	-----------

Approximate Dimensions

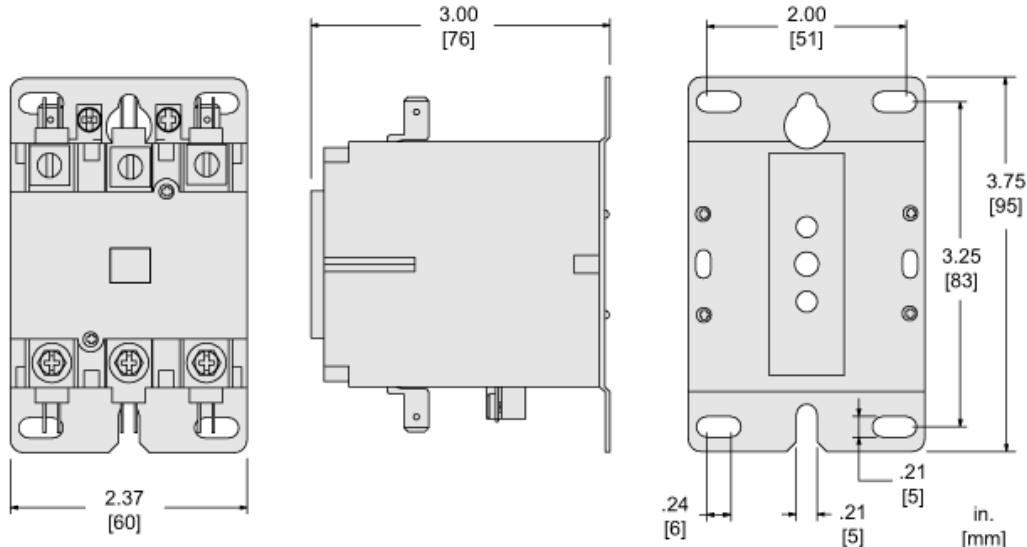

Product Life Status : **End of commerc. - Block**

8910DPA13V14 may be replaced by any of the following products:



8910DPA33V14

Contactor, Definite Purpose, 30A, 3 pole, 20 HP at 575 VAC, 3 phase, 24/24 VAC 50/60 Hz coil, open

Qty 1

Substitution date: |