

# Product data sheet

## Characteristics

# 8910DPA63V09

Contacteur, Definite Purpose, 60A, 3 pole, 30 HP at 575 VAC, 3 phase, 208/240 VAC 60 Hz 220 VAC 50 Hz coil, open



Product availability: Stock - Normally stocked in distribution facility

Price\*: 248.50 USD



### Main

Product or component type	Definite Purpose Contactor
Line Rated Current	60 A
Poles description	3P
Pole contact composition	3 NO
Range of product	DPA

### Complementary

Maximum Horse Power Rating	5 Hp 115 V AC, 1 phase 10 Hp 230 V AC, 1 phase 30 Hp 460 V AC, 3 phase 30 Hp 575 V AC, 3 phase 25 Hp 230 V AC, 3 phase
Locked rotor rated current	360 A 277 V AC 300 A 460 V AC 240 A 575 V AC
[Ue] rated operational voltage	600 V AC
[Uc] control circuit voltage	208...240 V AC 60 Hz 220 V AC 50 Hz
Phase	3 phase
Electrical connection	Box lugs Quick connect terminals

### Environment

Product certifications	UL Recognized CSA
------------------------	----------------------

## Ordering and shipping details

Category	21346 - 8910 DPA 6_(60 AMP)
Discount Schedule	CP1B
GTIN	00785901080794
Nbr. of units in pkg.	1
Package weight(Lbs)	24.00 Oz (680.389 g)
Returnability	Yes
Country of origin	CN

## Packing Units

Unit Type of Package 1	PCE
Package 1 Height	3.80 In (9.652 cm)
Package 1 width	4.50 In (11.43 cm)
Package 1 Length	2.80 In (7.112 cm)


## Offer Sustainability

REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>

## Contractual warranty

Warranty	18 months
----------	-----------

Approximate Dimensions

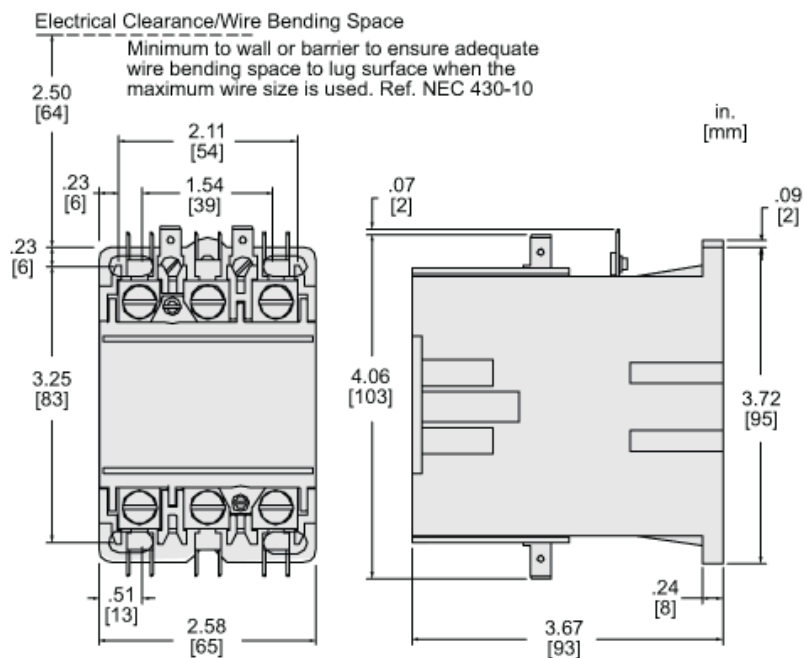

Product Life Status : Commercialised