

# Product data sheet

## Characteristics


# 8911DPSO42V09

Starter, Definite Purpose, nonreversing, 40A, 2 pole, 1 phase, 208 to 240 VAC coil, melting alloy overload, open style



Product availability: Stock - Normally stocked in distribution facility

Price\*: 394.80 USD

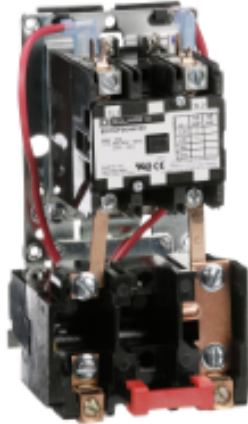

### Main

Product or Component Type	Definite Purpose Starter
Line Rated Current	40 A
Maximum Horse Power Rating	3 Hp 115 V AC, 1 phase 7.5 Hp 230 V AC, 1 phase
[Ue] rated operational voltage	600 V AC
[Uc] control circuit voltage	220 V AC 50 Hz 208...240 V AC 60 Hz
Phase	1 phase

### Complementary

NEMA Degree of Protection	Not rated (open device)
Locked rotor rated current	240 A 230 V AC 200 A 460 V AC 160 A 575 V AC
Poles description	2P
Range of Product	DPS
Thermal overload type	Melting alloy
Number of thermal units required	1

### Ordering and shipping details

Category	21381 - 8911 DP
Discount Schedule	CP1
GTIN	00785901167853
Nbr. of units in pkg.	1
Package weight(Lbs)	2.36 Lb(US) (1.071 kg)
Returnability	Yes
Country of origin	CN

## Packing Units

Unit Type of Package 1	PCE
Package 1 Height	5.10 In (12.954 cm)
Package 1 width	5.00 In (12.7 cm)
Package 1 Length	8.10 In (20.574 cm)

## Offer Sustainability

REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>

## Contractual warranty

Warranty	18 months
----------	-----------

Product Life Status : **Commercialised**