

# Product data sheet

## Characteristics

# 9001KM35

## PILOT LIGHT MODULE 28V 30MM TYPE K+SK +KX



Product availability: Stock - Normally stocked in distribution facility

Price\*: 86.00 USD



### Main

|                           |                                 |
|---------------------------|---------------------------------|
| Range of product          | Harmony 9001SK<br>Harmony 9001K |
| Product or component type | Light block                     |
| Device short name         | 9001K                           |
| Bulb base                 | BA 9s                           |
| Light block supply        | Direct via integral resistance  |

### Complementary

|                           |                       |
|---------------------------|-----------------------|
| Net weight                | 0.11 Lb(US) (0.05 kg) |
| Light source              | Incandescent          |
| [Us] rated supply voltage | 24 V AC/DC            |

### Environment

|                                       |  |
|---------------------------------------|--|
| Protective treatment                  | TC   |
| Ambient air temperature for storage   | -40...158 °F (-40...70 °C)   |
| Ambient air temperature for operation | -13...158 °F (-25...70 °C)   |
| IP degree of protection               | IP20 conforming to IEC 60529   |
| Standards                             | EN/IEC 60947-5-4<br>JIS C 852<br>UL 508<br>EN/IEC 60947-1<br>CSA C22.2 No 14<br>JIS C 4520<br>EN/IEC 60947-5-1 |
| Product certifications                | NEMA<br>UL 508   |
| Electrical shock protection class     | Class II IEC 61140   |
| Vibration resistance                  | 7 gn 2...500 Hz)IEC 60068-2-6  |
| Shock resistance                      | 50 gn IEC 60068-2-27   |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. \*Prices are indicative. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Ordering and shipping details

|                       |                               |
|-----------------------|-------------------------------|
| Category              | 21435 - 9001 KM LIGHT MODULES |
| Discount Schedule     | CS1                           |
| GTIN                  | 03389110918564                |
| Nbr. of units in pkg. | 1                             |
| Package weight(Lbs)   | 2.24 Oz (63.503 g)            |
| Returnability         | Yes                           |
| Country of origin     | MX                            |

## Packing Units

|                        |                    |
|------------------------|--------------------|
| Unit Type of Package 1 | PCE                |
| Package 1 Height       | 2.20 In (5.588 cm) |
| Package 1 width        | 3.60 In (9.144 cm) |
| Package 1 Length       | 1.90 In (4.826 cm) |

## Offer Sustainability

|                            |   |
|----------------------------|---|
| Sustainable offer status   | Green Premium product   |
| California proposition 65  | WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> |
| REACH Regulation           | <a href="#">REACH Declaration</a>   |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>  |
| Mercury free               | Yes   |
| RoHS exemption information | <a href="#">Yes</a>   |
| China RoHS Regulation      | <a href="#">China RoHS Declaration</a>  |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>   |
| WEEE                       | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.  |


## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

---

Dimensions

---

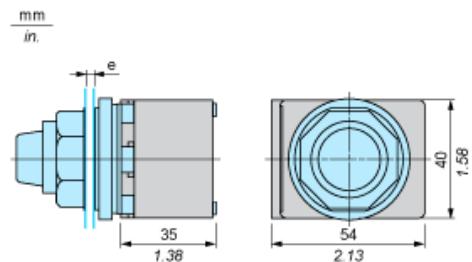

e panel thickness: 1 to 6 mm / 0.04 to 0.24 in.

|                       |                |
|-----------------------|----------------|
| Product Life Status : | Commercialised |
|-----------------------|----------------|