

Product data sheet

Characteristics

9050JCK60V20

Timing Relay, Type JCK, plug In, on delay, programmable, 0.5 second to 999 hours, 10A, 240 VAC, 120 VAC/110 VDC



Product availability: Stock - Normally stocked in distribution facility

Price*: 152.00 USD



Main

Range of product	9050JCK
Product or component type	Timer
Time delay type	On-delay
Time delay range	0.1...99.9 s 1...999 s 0.1...99.9 min 0.05...9.99 s 0.1...99.9 h 1...999 h
[Uc] control circuit voltage	120 V AC

Complementary

Hold-in power consumption in VA	3 VA
Line Rated Current	10 A
Switch function	DPDT
Contacts type and composition	2 NO + 2 NC
Contacts material	Silver nickel
Maximum switching voltage	240 V AC
Mounting support	Socket
Pin number	8
Shape of pin	Tubular
Product compatibility	8501NR51 8501NR52

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. *Prices are indicative. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Environment

Product certifications	CE UL Recognized UL Listed
Ambient air temperature for operation	-18...150 °F (-28...66 °C)
Height	2.36 In (60 mm)
Width	1.73 In (44 mm)
Depth	3.58 In (91 mm)

Ordering and shipping details

Category	21652 - 9050 JCK60, 70 PROGRAMMABLE TIMERS
Discount Schedule	CP2
GTIN	00785901053866
Nbr. of units in pkg.	1
Package weight(Lbs)	0.3 Lb(US) (0.14 kg)
Returnability	Yes
Country of origin	US

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	1.90 In (4.826 cm)
Package 1 width	2.60 In (6.604 cm)
Package 1 Length	4.40 In (11.176 cm)
Unit Type of Package 2	CAR
Number of Units in Package 2	20
Package 2 Weight	5.50 Lb(US) (2.495 kg)
Package 2 Height	4.50 In (11.43 cm)
Package 2 width	10.00 In (25.4 cm)
Package 2 Length	11.00 In (27.94 cm)
Unit Type of Package 3	PAL
Number of Units in Package 3	600
Package 3 Weight	165.00 Lb(US) (74.843 kg)
Package 3 Height	40.00 In (101.6 cm)
Package 3 width	40.00 In (101.6 cm)
Package 3 Length	48.00 In (121.92 cm)


Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<input checked="" type="checkbox"/> REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <input checked="" type="checkbox"/> EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<input checked="" type="checkbox"/> Yes
China RoHS Regulation	<input checked="" type="checkbox"/> China RoHS Declaration
Environmental Disclosure	<input checked="" type="checkbox"/> Product Environmental Profile
Circularity Profile	<input checked="" type="checkbox"/> End Of Life Information

Contractual warranty


Warranty	18 months
----------	-----------

Approximate Dimensions

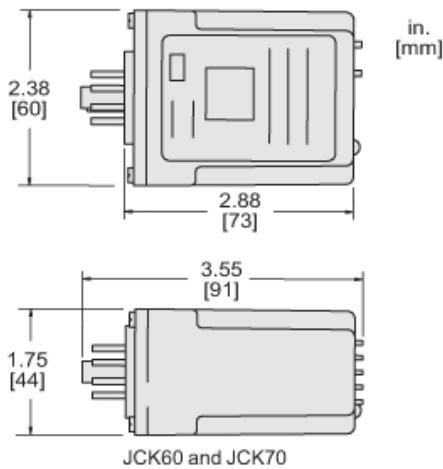


Connections and Wiring Diagrams

Type JCK60 (1)



Type JCK70 (1)



(1) Do not apply DC voltage to the 240 Vac timers (voltage code V24).

Product Life Status : **Commercialised**