

Product data sheet

Characteristics

9050JCK70V24

Timing Relay, Type JCK, plug In, multifunction, programmable, 0.5 second to 999 hours, 10A, 240 VAC, 240 VAC 50/60 Hz



Product availability: Stock - Normally stocked in distribution facility

Price*: 173.00 USD



Main

Range of product	9050JCK
Product or component type	Timer
Time delay type	Off-delay Trigger on-delay One shot falling edge One shot On-delay and off-delay Watchdog On-delay Repeat cycle Interval
Time delay range	0.1...99.9 min 0.05...9.99 s 1...999 s 0.1...99.9 h 0.1...99.9 s 1...999 h
[Uc] control circuit voltage	240 V AC

Complementary

Hold-in power consumption in VA	3.2 VA
Line Rated Current	10 A
Switch function	DPDT
Contacts type and composition	2 NO + 2 NC
Contacts material	Silver nickel
Maximum switching voltage	240 V AC
Mounting support	Socket
Pin number	11
Shape of pin	Tubular
Product compatibility	8501NR61 8501NR62

Environment

Product certifications	UL Listed UL Recognized CE
Ambient air temperature for operation	-18...122 °F (-28...50 °C)
Height	2.36 In (60 mm)
Width	1.73 In (44 mm)
Depth	3.58 In (91 mm)

Ordering and shipping details

Category	21652 - 9050 JCK60, 70 PROGRAMMABLE TIMERS
Discount Schedule	CP2
GTIN	00785901132707
Nbr. of units in pkg.	1
Package weight(Lbs)	0.33 Lb(US) (0.15 kg)
Returnability	Yes
Country of origin	US

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	2.60 In (6.604 cm)
Package 1 width	1.90 In (4.826 cm)
Package 1 Length	4.30 In (10.922 cm)
Unit Type of Package 2	CAR
Number of Units in Package 2	10
Package 2 Weight	3.00 Lb(US) (1.361 kg)
Package 2 Height	4.50 In (11.43 cm)
Package 2 width	10.00 In (25.4 cm)
Package 2 Length	11.00 In (27.94 cm)


Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	 Yes
China RoHS Regulation	 China RoHS Declaration
Environmental Disclosure	 Product Environmental Profile
Circularity Profile	 End Of Life Information


Contractual warranty

Warranty	18 months
----------	-----------

Approximate Dimensions

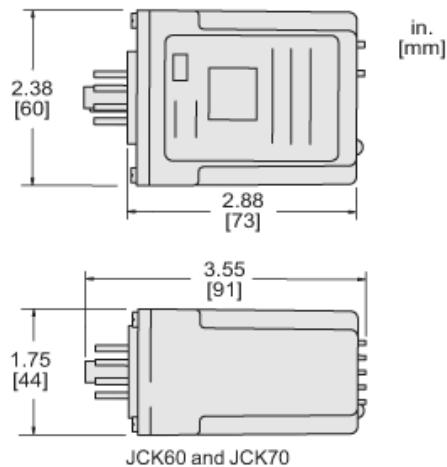

Connections and Wiring Diagrams

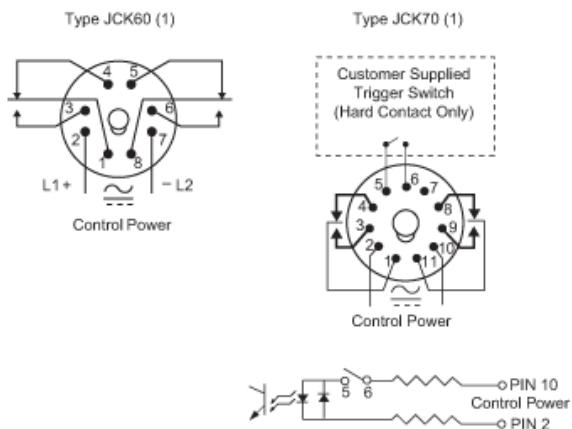

(1) Do not apply DC voltage to the 240 Vac timers (voltage code V24).

Product Life Status : **Commercialised**