

Product data sheet

Characteristics


9065ST420

Overload Relay, Motor Logic, solid state overload relay, NEMA Size 4, 3 pole, 45A to 135A, 600VAC, replacement relay



Product availability: Non-Stock - Not normally stocked in distribution facility

Price*: 516.00 USD

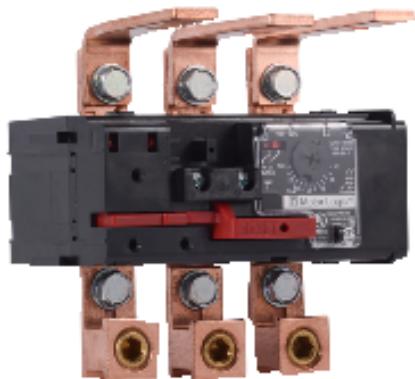

Main

Range of product	Motor Logic
Product destination	Starter
Thermal overload type	Solid state

Complementary

NEMA size	4
Phase	3 phase
Mounting support	Mounting plate
[Ue] rated operational voltage	600 V AC
Height	5.92 in (150.4 mm)
Width	5.33 in (135.4 mm)
Depth	4.53 in (115.1 mm)

Ordering and shipping details

Category	21662 - 9065 SOLID STATE OVERLOAD RELAYS
Discount Schedule	CP1
GTIN	00785901751977
Nbr. of units in pkg.	1
Package weight(Lbs)	3.53 Lb(US) (1.6 kg)
Returnability	No
Country of origin	MX

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein. *Prices are indicative.

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	5.50 In (13.97 cm)
Package 1 width	7.00 In (17.78 cm)
Package 1 Length	7.50 In (19.05 cm)

Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	 REACH Declaration
EU RoHS Directive	Compliant  EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	 Yes
China RoHS Regulation	 China RoHS Declaration
Environmental Disclosure	 Product Environmental Profile
Circularity Profile	 End Of Life Information
PVC free	Yes

Contractual warranty

Warranty	18 months
----------	-----------

Product Life Status : **Commercialised**