

Product data sheet

Characteristics

9070T250D12

Transformer, Type T, industrial control, 250 VA,
480 VAC primary / 240 VAC secondary, 1 phase,
50/60 Hz, 80 °C rise



Product availability: Non-Stock - Not normally stocked in distribution facility

Price*: 363.00 USD

Main

Product or component type	Industrial Control Transformer
Rated power in VA	250 VA
Range of product	T

Complementary

Phase	1 phase
Rated power in VA	250 VA UL 250 VA CSA 250 VA NOM 160 VA
Temperature rise	80 °C
Electrical connection	Screw clamp terminals
Height	3.25 In (82.55 mm)
Width	3.75 In (95.25 mm)
Depth	5.25 In (133.35 mm)
Material	Copper winding
Product compatibility	FSC2

Environment

Product certifications	CSA file LR37055 guide 184-N-90 UL listed file E61239
NEMA degree of protection	Not rated (open device)
Insulation temperature	266 °F (130 °C)

Ordering and shipping details

Category	16206 - 9070 T (NOT TF) MTO
Discount Schedule	CP8
GTIN	00785901328056
Nbr. of units in pkg.	1
Package weight(Lbs)	1 Lb(US) (0.45 kg)
Returnability	No
Country of origin	US

Packing Units

Package 1 Height	5.60 In (14.224 cm)
Package 1 width	6.40 In (16.256 cm)
Package 1 Length	7.20 In (18.288 cm)


Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Phenyl glycidyl ether, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
PVC free	Yes

Contractual warranty

Warranty	18 months
----------	-----------

Approximate Dimensions

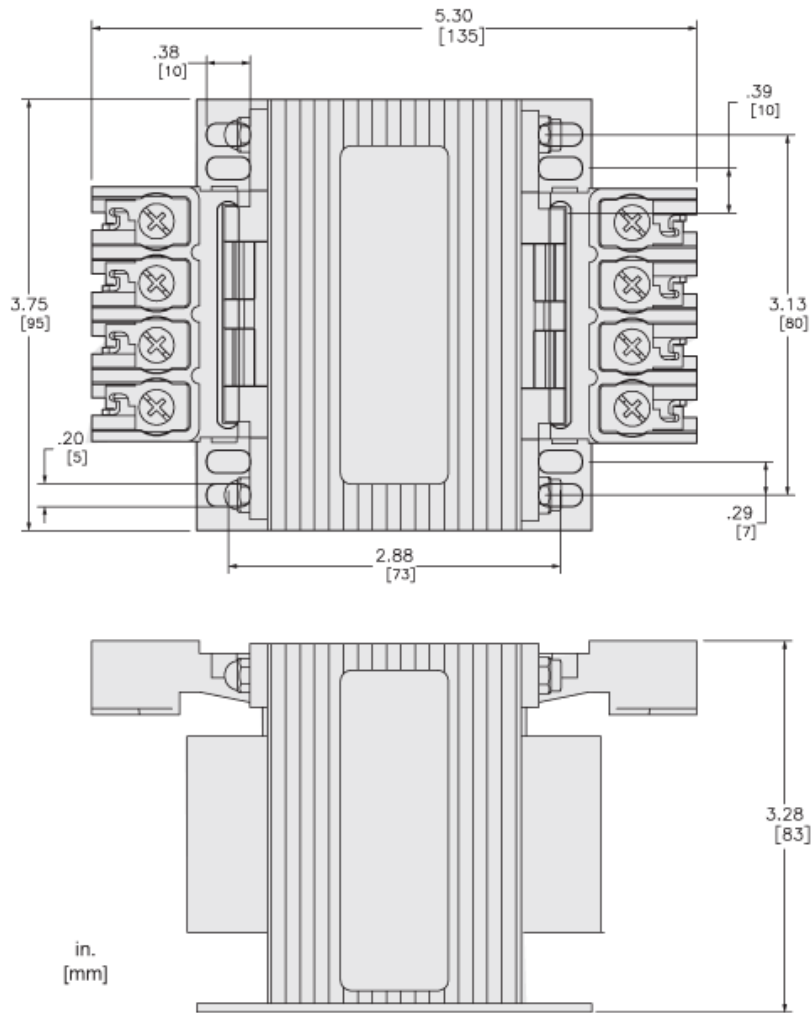

Product Life Status : **Commercialised**