

# Product data sheet

## Characteristics


# 9422ATCF331

Operating mechanism, flange mounted, variable depth, 30A, 600 V, fuseholder, switch mechanism, 6 inch handle, NEMA 4



Product availability: Stock - Normally stocked in distribution facility

Price\*: 637.00 USD

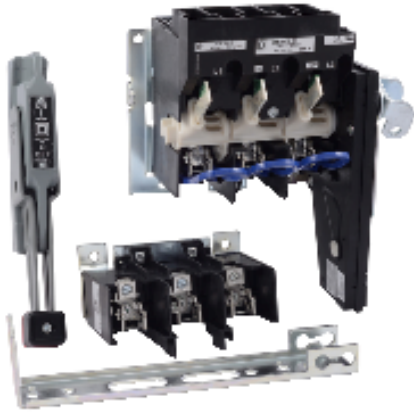

### Main

|                           |                           |
|---------------------------|---------------------------|
| Range of product          | 9422T                     |
| Product or component type | Disconnect Switch         |
| Disconnecter device type  | Fusible disconnect switch |

### Complementary

|                            |   |
|----------------------------|---|
| Product mounting           | Flange rod variable depth   |
| Line Rated Current         | 30 A  |
| Maximum Horse Power Rating | 7.5 Hp 200 V AC<br>7.5 Hp 230 V AC<br>15 Hp 460 V AC<br>20 Hp 575 V AC<br>5 Hp 250 V DC |
| Associated fuse rating     | 60 A 250 V<br>30 A 600 V  |
| Provided equipment         | 6 in handle included NEMA 1/3/3R/4 enclosures sheet steel                               |
| Fuse type                  | H<br>K<br>R<br>J  |

### Environment

|                        |                      |
|------------------------|----------------------|
| Product certifications | UL Recognized<br>CSA |
|------------------------|----------------------|

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein. \*Prices are indicative

## Ordering and shipping details

|                       |                        |
|-----------------------|------------------------|
| Category              | 21732 - 9422           |
| Discount Schedule     | CP1                    |
| GTIN                  | 00785901872160         |
| Nbr. of units in pkg. | 1                      |
| Package weight(Lbs)   | 9.00 Lb(US) (4.082 kg) |
| Returnability         | Yes                    |
| Country of origin     | MX                     |

## Packing Units

|                        |                      |
|------------------------|----------------------|
| Unit Type of Package 1 | PCE                  |
| Package 1 Height       | 7.20 In (18.288 cm)  |
| Package 1 width        | 11.10 In (28.194 cm) |
| Package 1 Length       | 16.00 In (40.64 cm)  |

## Offer Sustainability

|                            |   |
|----------------------------|---|
| California proposition 65  | WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> |
| REACH Regulation           | <a href="#">REACH Declaration</a>   |
| EU RoHS Directive          | Compliant <a href="#">EU RoHS Declaration</a>   |
| Mercury free               | Yes   |
| RoHS exemption information | <a href="#">Yes</a>   |
| China RoHS Regulation      | <a href="#">China RoHS Declaration</a>  |
| PVC free                   | Yes   |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Product Life Status : **Commercialised**