

Product data sheet

Characteristics


9422ATEF101

Operating mechanism, flange mounted, variable depth, 100A, 600 V, fuseholder, switch mechanism, 6 inch handle, NEMA 4



Product availability: Stock - Normally stocked in distribution facility

Price*: 1086.20 USD

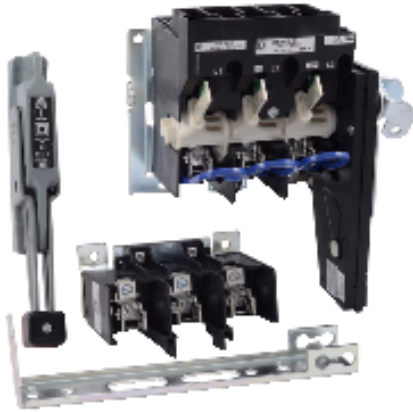

Main

Range of product	9422T
Product or component type	Disconnect Switch
Disconnecter device type	Fusible disconnect switch

Complementary

Product mounting	Flange rod variable depth
Line Rated Current	100 A
Maximum Horse Power Rating	25 Hp 200 V AC 30 Hp 230 V AC 60 Hp 460 V AC 75 Hp 575 V AC 20 Hp 250 V DC
Associated fuse rating	100 A 250/600 V
Provided equipment	6 in handle included NEMA 1/3/3R/4 enclosures sheet steel
Fuse type	R H K J

Environment

Product certifications	UL Recognized CSA
------------------------	----------------------

Ordering and shipping details

Category	21732 - 9422
Discount Schedule	CP1
GTIN	00785901872276
Nbr. of units in pkg.	1
Package weight(Lbs)	9.72 Lb(US) (4.41 kg)

Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	7.20 In (18.3 cm)
Package 1 width	11.30 In (28.7 cm)
Package 1 Length	16.10 In (40.9 cm)

Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
PVC free	Yes

Contractual warranty

Warranty	18 months
----------	-----------

Product Life Status :	Commercialised
-----------------------	-----------------------