

# Product data sheet

## Characteristics


# 9422TFB2

Operating mechanism, flange mounted, bracket mount, fixed depth assembly, 200A, 600V, H, K, J, R fuseholder, switch mechanism, 6 inch handle



Product availability: Non-Stock - Not normally stocked in distribution facility

Price\*: 1888.50 USD

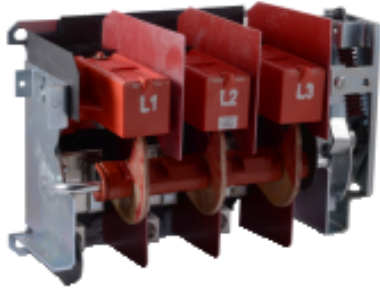

### Main

Range of product	9422T
Product or component type	Disconnect Switch
Disconnecter device type	Fusible disconnect switch

### Complementary

Product mounting	Bracket fixed depth
Line Rated Current	200 A
Maximum Horse Power Rating	40 Hp 200 V AC 60 Hp 230 V AC 125 Hp 460 V AC 150 Hp 575 V AC 40 Hp 250 V DC
Associated fuse rating	200 A 250/600 V
Provided equipment	6 in handle included
Fuse type	K R J H

### Environment

Product certifications	CSA UL Recognized
------------------------	----------------------

### Ordering and shipping details

Category	21732 - 9422
Discount Schedule	CP1
GTIN	00785901043782
Nbr. of units in pkg.	1
Package weight(Lbs)	28.19 Lb(US) (12.788 kg)

Returnability	No
Country of origin	MX

### Packing Units

Unit Type of Package 1	PCE
Package 1 Height	13.50 In (34.29 cm)
Package 1 width	14.50 In (36.83 cm)
Package 1 Length	23.00 In (58.42 cm)

### Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
PVC free	Yes

### Contractual warranty

Warranty	18 months
----------	-----------

Product Life Status :	<b>Commercialised</b>
-----------------------	-----------------------