

Product data sheet

Characteristics


9999SO5

NEMA Motor Starter and contactor, Type S, isolated alarm contacts, for melting alloy overload relays, NC alarm contact



Product availability: Non-Stock - Not normally stocked in distribution facility

Price*: 116.00 USD

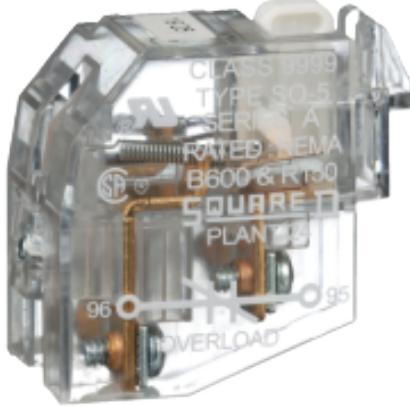

Main

Range of product	Accessory
Product destination	Overload relay
Thermal overload type	Melting alloy

Complementary

Product or component type	Auxiliary contact
Contacts type and composition	1 NC
[Ue] rated operational voltage	600 V AC

Ordering and shipping details

Category	21761 - 9999 DISCOUNT CP1
Discount Schedule	CP1
GTIN	00785901057840
Nbr. of units in pkg.	1
Package weight(Lbs)	1.60 Oz (45.359 g)
Returnability	No
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	1.40 In (3.556 cm)
Package 1 width	2.30 In (5.842 cm)
Package 1 Length	3.10 In (7.874 cm)

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein. *Prices are indicative.

Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	 REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant  EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	 Yes
China RoHS Regulation	 China RoHS Declaration
PVC free	Yes

Contractual warranty

Warranty	18 months
----------	-----------

Product Life Status : **Commercialised**