

# Product data sheet

## Characteristics


# 9999SX12

Auxiliary contact, Type S, 1 NC contact, internal, nonconvertible



Product availability: Stock - Normally stocked in distribution facility

Price\*: 99.00 USD

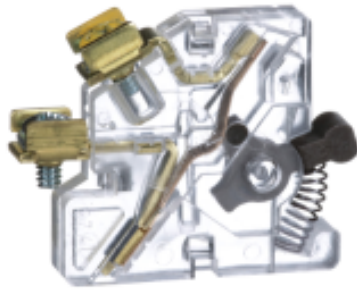

### Main

Range of product	Type S
Product or component type	Auxiliary Contact Module
Product destination	Contacteur starter

### Complementary

NEMA size	1 0 00 2
Auxiliary contact composition	1 NC
[Ue] rated operational voltage	<= 600 V AC 50/60 Hz
Rated breaking capacity	3 A 120 V AC inductive control circuit UL 508 1.5 A 240 V AC inductive control circuit UL 508 0.75 A 480 V AC inductive control circuit UL 508 0.6 A 600 V AC inductive control circuit UL 508 5 A <= 600 V AC resistive control circuit UL 508

### Environment

Product certifications	CSA UL Recognized UL Listed
------------------------	-----------------------------------

### Ordering and shipping details

Category	21761 - 9999 DISCOUNT CP1
Discount Schedule	CP1
GTIN	00785901879732
Nbr. of units in pkg.	1
Package weight(Lbs)	1.12 Oz (31.752 g)
Returnability	Yes
Country of origin	MX

## Packing Units

Unit Type of Package 1	PCE
Package 1 Height	1.30 In (3.302 cm)
Package 1 width	2.30 In (5.842 cm)
Package 1 Length	3.00 In (7.62 cm)

## Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Not compliant
China RoHS Regulation	<a href="#">China RoHS Declaration</a>

## Contractual warranty

Warranty	18 months
----------	-----------

Product Life Status : **Commercialised**