

Product availability: Stock - Normally stocked in distribution facility



Main

| | |
|---------------------------|-----------------------|
| Range of Product | Modicon X80 |
| Product or Component Type | Discrete input module |
| Discrete input number | 8 |
| Discrete input type | Isolated |
| Input type | Capacitive |
| Discrete input voltage | 200...240 V AC |
| Discrete input current | 10.4 mA |

Complementary

| | |
|--------------------------------|---|
| Input compatibility | With 2-wire/3-wire proximity sensors IEC 60947-5-2 With 2-wire/3-wire proximity sensors IEC 61131-2 Type 2 |
| Network Frequency | 50/60 Hz |
| Network frequency limits | 47...63 Hz |
| Voltage range | 170...264 V |
| Current state 1 guaranteed | ≥ 6 mA |
| Current state 0 guaranteed | ≤ 4 mA |
| Input impedance | 21000 Ohm |
| Insulation resistance | > 10 MOhm 500 V DC |
| Power dissipation in W | 4.73 W |
| AC activation filtering time | 10 Ms |
| AC deactivation filtering time | 20 Ms |
| Typical current consumption | 76 mA 3.3 V DC 93.6 mA 24 V DC |
| Current consumption | ≤ 126 mA 3.3 V DC ≤ 154.8 mA 24 V DC |
| Protection type | 1 external fuse per group of channel 0.5 A fast blow |
| Voltage detection threshold | > 164 V AC sensor OK < 80 V AC sensor fault |

| | |
|------------|--|
| Status LED | Module operating (RUN) 1 LED Green) Channel diagnostic 1 LED per channel Green) Module error (ERR) 1 LED Red) Module I/O 1 LED Red) |
| Net Weight | 0.26 Lb(US) (0.12 kg) |

Environment

| | |
|---------------------------------------|--|
| IP Degree of Protection | IP20 |
| Directives | 2014/35/EU - low voltage directive 2014/30/EU - electromagnetic compatibility |
| Dielectric strength | 1500 V AC 50/60 Hz 1 min |
| Vibration resistance | 3 gn |
| Shock resistance | 30 gn |
| Ambient Air Temperature for Storage | -40...185 °F (-40...85 °C) |
| Ambient air temperature for operation | 32...140 °F (0...60 °C) |
| Relative humidity | 5...95 % 131 °F (55 °C) without condensation |
| Operating altitude | 0...6561.68 ft (0...2000 m) 2000...5000 m with derating factor |

Ordering and shipping details

| | |
|-----------------------|----------------------|
| Category | 18160 - MODICON M340 |
| Discount Schedule | PC34 |
| GTIN | 3595864081595 |
| Nbr. of units in pkg. | 1 |
| Package weight(Lbs) | 5.64 Oz (160 g) |
| Returnability | No |
| Country of origin | FR |

Packing Units

| | |
|------------------------------|----------------------|
| Unit Type of Package 1 | PCE |
| Package 1 Height | 2.17 In (5.5 cm) |
| Package 1 width | 4.65 In (11.8 cm) |
| Package 1 Length | 4.65 In (11.8 cm) |
| Unit Type of Package 2 | S02 |
| Number of Units in Package 2 | 15 |
| Package 2 Weight | 5.95 Lb(US) (2.7 kg) |
| Package 2 Height | 5.91 In (15 cm) |
| Package 2 width | 11.81 In (30 cm) |
| Package 2 Length | 15.75 In (40 cm) |


Offer Sustainability

| | |
|----------------------------|---|
| Sustainable offer status | Green Premium product |
| California proposition 65 | WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |
| REACH Regulation | REACH Declaration |
| REACH free of SVHC | Yes |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Mercury free | Yes |
| RoHS exemption information | Yes |
| China RoHS Regulation | China RoHS Declaration |
| Environmental Disclosure | Product Environmental Profile |

| | |
|-----------------------------|--|
| Circularity Profile | End Of Life Information |
| WEEE | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins. |
| Contractual warranty | |
| Warranty | 18 months |

Modules Mounted on Racks

Dimensions

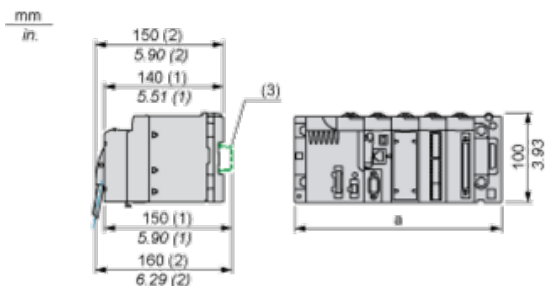

(1) With removable terminal block (cage, screw or spring).


(2) With FCN connector.

(3) On AM1 ED rail: 35 mm wide, 15 mm deep. Only possible with BMXXBP0400/0400H/0600/0600H/0800/0800H rack.


| Rack references | a in mm | a in in. |
|----------------------------|---------|----------|
| BMXXBP0400 and BMXXBP0400H | 242.4 | 09.54 |
| BMXXBP0600 and BMXXBP0600H | 307.6 | 12.11 |
| BMXXBP0800 and BMXXBP0800H | 372.8 | 14.68 |
| BMXXBP1200 and BMXXBP1200H | 503.2 | 19.81 |

Connecting the Module

Input Circuit Diagram

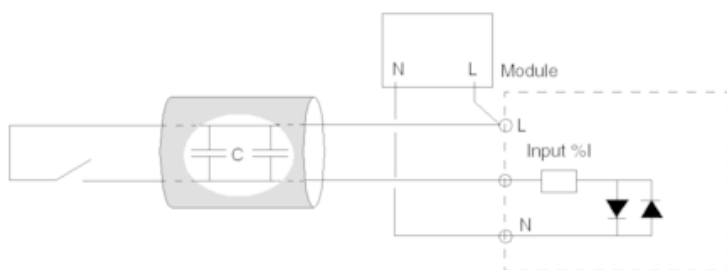

Module Connection

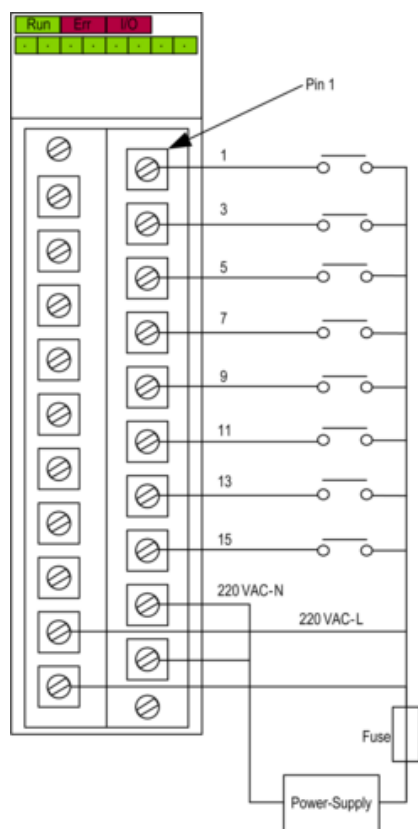

power supply 200...240 VAC

fuse fast blow fuse of 0.5 A

Product Life Status : **Commercialised**