

# LADR0

Time delay auxiliary contact block, TeSys D,  
1NO + 1NC, off delay 0.3-3s, front, screw clamp  
terminals



Product availability: Stock - Normally stocked in distribution facility

Price\*: 131.00 USD

## Main

Range	TeSys
Product name	TeSys D
Product or component type	Time delay auxiliary contact block
Range compatibility	TeSys D CAD TeSys D LC1D TeSys F LC1F TeSys F CR1F
Mounting location	Front
Pole contact composition	1 NO + 1 NC
Auxiliary contacts operation	Time delay
Timer type	Off delay
Time delay range	0.3...3 s
[Ue] rated operational voltage	690 V AC 25...400 Hz
[Ie] rated operational current	6 A 120 V AC-15 1.04 A 690 V AC-15 0.55 A 125 V DC-13 0.1 A 600 V DC-13
[Ui] rated insulation voltage	690 V IEC 60947-5-1 600 V UL 60947-5-1 600 V CSA C22.2 No 60947-5-1
[Ith] conventional free air thermal current	10 A 140 °F (60 °C)
Standards	EN/IEC 60947-5-1 UL 60947-5-1 CSA C22.2 No 60947-5-1 GB/T 14048.5
Product certifications	IECEE CB Scheme UL CSA CCC EAC UKCA

## Complementary

Irms rated making capacity	140 A AC IEC 60947-5-1 250 A DC IEC 60947-5-1
Permissible short-time rating	100 A 140 °F (60 °C) 1 s 120 A 140 °F (60 °C) 500 ms 140 A 140 °F (60 °C) 100 ms
Protection type	GG fuse 10 A
Mechanical durability	5 Mcycles
Minimum switching current	5 MA
Minimum switching voltage	17 V
Non-overlap time	1.5 Ms on de-energisation no overlap between NC and NO contact 1.5 Ms on energisation no overlap between NC and NO contact
Insulation resistance	> 10 MOhm
Connections - terminals	Screw clamp terminals 1 0.00...0.00 in <sup>2</sup> (1...2.5 mm <sup>2</sup> )flexible with cable end Screw clamp terminals 1 0.00...0.00 in <sup>2</sup> (1...2.5 mm <sup>2</sup> )flexible without cable end Screw clamp terminals 2 0.00...0.00 in <sup>2</sup> (1...2.5 mm <sup>2</sup> )flexible with cable end Screw clamp terminals 2 0.00...0.00 in <sup>2</sup> (1...2.5 mm <sup>2</sup> )flexible without cable end Screw clamp terminals 1 0.00...0.00 in <sup>2</sup> (1...2.5 mm <sup>2</sup> )rigid Screw clamp terminals 2 0.00...0.00 in <sup>2</sup> (1...2.5 mm <sup>2</sup> )rigid Screw clamp terminals
Tightening torque	15.05 Lbf.In (1.7 N.m) flat Ø 6 mm 15.05 Lbf.In (1.7 N.m) Philips No 2
Height	1.89 In (48 mm)
Width	1.73 In (44 mm)
Depth	2.40 In (61 mm)

## Environment

Environmental characteristic	Normal environment
IP degree of protection	IP20 conforming to IEC 60529
Protective treatment	TH IEC 60068
Ambient air temperature for storage	-76...176 °F (-60...80 °C)
Ambient air temperature for operation	-40...158 °F (-40...70 °C)
Operating altitude	3000 m

## Ordering and shipping details

Category	22341 - CONTACTOR,D,K,&F ACCESS
Discount Schedule	I12
GTIN	03389110386141
Nbr. of units in pkg.	1
Package weight(Lbs)	2.68 Oz (76 g)
Returnability	Yes
Country of origin	FR

## Packing Units

Unit Type of Package 1	PCE
Package 1 Height	1.97 In (5 cm)
Package 1 width	2.05 In (5.2 cm)
Package 1 Length	2.56 In (6.5 cm)
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Weight	3.88 Lb(US) (1.76 kg)
Package 2 Height	2.13 In (5.4 cm)
Package 2 width	5.20 In (13.2 cm)
Package 2 Length	9.53 In (24.2 cm)

Unit Type of Package 3	S03
Number of Units in Package 3	140
Package 3 Weight	24.47 Lb(US) (11.099 kg)
Package 3 Height	11.81 In (30 cm)
Package 3 width	11.81 In (30 cm)
Package 3 Length	15.75 In (40 cm)


### Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: Cancer - <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
PVC free	Yes

### Contractual warranty

Warranty	18 months
----------	-----------

Approximate Dimensions

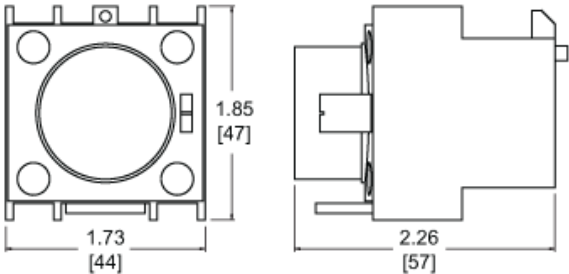

Product Life Status : **Commercialised**