

# SSM1A16B7

Harmony, Solid state modular relay, 6 A, DIN rail mount, zero voltage switching, input 18...36 V AC, output 24...280 V AC



Product availability: Non-Stock - Not normally stocked in distribution facility

Price\*: 30.40 USD



## Main

Range of Product	Harmony Solid State Relays
Product or Component Type	Solid state relay up to 10 A
Device short name	SSM
Number of Channels	1
Phase	1 phase
Output switching mode	Zero voltage switching

## Complementary

Mounting Support	Symmetrical DIN rail
Line Rated Current	6 A
Output voltage	24...280 V AC
[Uc] control circuit voltage	18...36 V AC
Tightening torque	0.5...0.8 N.m for input 0.5...0.8 N.m for output
Connections - terminals	Screw terminals 1 x 0.3...1 x 1.5 mm <sup>2</sup> , AWG 22...AWG 16) input Screw terminals 1 x 0.3...1 x 2.5 mm <sup>2</sup> , AWG 22...AWG 14) output
Capacitance unbalance	10 PF for input/output
Insulation resistance	1000 MOhm at 500 V DC
Local signalling	For input status LED (green)
Minimum switching voltage	18 V AC turn-on
Maximum switching voltage	4 V AC turn-off
Input current limits	3.5...8.5 MA
Solid state output type	Zero voltage switching SCR output
Load current	0.15...6 A
Absolute maximum voltage	600 V
Surge current	285 A 16.6 ms 300 A 20 ms
Maximum voltage drop	<1.3 V on-state

Maximum Horse Power Rating	0.16 Hp 104 °F (40 °C) 240 V AC
Maximum I <sup>2</sup> t for fusing	410 A <sup>2</sup> .S for 10 ms at 50 Hz 375 A <sup>2</sup> .S for 8.33 ms at 60 Hz
Maximum leakage current	0.1 MA off-state
DV/dt	500 V/μs off-state at maximum voltage
Response time	0.5 cycle (turn-on) 30 ms (turn-off)
Cos phi	0.5 (with maximum load)
Overvoltage category	III
Maximum Width	0.43 In (11 mm)
Maximum Height	3.56 In (90.3 mm)
Maximum Depth	3.30 In (83.7 mm)
Net Weight	0.11 Lb(US) (0.05 kg)

## Environment

Flame retardance	V0 conforming to UL 94
Dielectric strength	4 KV AC for input/output 4 KV AC for input or output to case
Pollution degree	2
Standards	IEC 60950-1 IEC 61000 IEC 62314
Product Certifications	CSA UL
Marking	CE
IP degree of protection	IP20
Ambient Air Temperature for Operation	-22...176 °F (-30...80 °C)
Ambient Air Temperature for Storage	-22...212 °F (-30...100 °C)



## Ordering and shipping details

Category	22375 - INTERFACE MODULE(ABA,R,S)
Discount Schedule	CP2
GTIN	03606480579394
Nbr. of units in pkg.	1
Package weight(Lbs)	2.61 Oz (74 g)
Returnability	No
Country of origin	MX

## Packing Units

Unit Type of Package 1	PCE
Package 1 Height	0.79 In (2 cm)
Package 1 width	3.54 In (9 cm)
Package 1 Length	3.54 In (9 cm)

## Offer Sustainability


Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	 <a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  <a href="#">EU RoHS Declaration</a>
Mercury free	Yes

---

RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End Of Life Information</a>

---


Dimensions

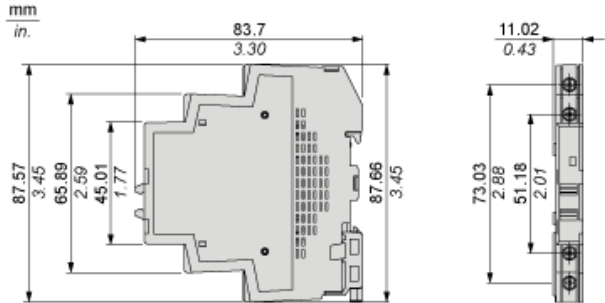

---

Derating Curves

---

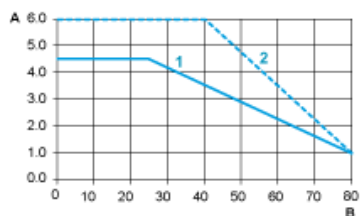

A : Load Current (Amperes)

B : Ambient Temperature (°C)

1 : Multiple units, no minimum spacing between components

2 : Installed single unit, distance to adjacent components more than 11 mm

Product Life Status : <b>Commercialised</b>
---