



Product availability: Non-Stock - Not normally stocked in distribution facility

Price\*: 1270.00 USD



## Main

Range of Product	Logic/Motion controller - Modicon M262
Product or Component Type	Logic controller
[Us] rated supply voltage	24 V DC - 15...20 %
Discrete I/O number	8
Upstream connectivity	IIoT-ready machine to cloud Connected machine to plant

## Complementary

Supply voltage limits	20.4...28.8 V DC
Power Consumption in W	82 W
Inrush current	40 A
Number of overvoltage protection	With
Discrete input number	4, discrete input fast input IEC 61131-2 Type 1
Discrete input voltage	24 V
Discrete input voltage type	DC
Discrete input logic	Sink
Voltage state 1 guaranteed	$\geq 15$ V DC
Voltage state 0 guaranteed	$\leq 5$ V DC
Discrete input current	7.5 MA fast input
Input impedance	2.81 kOhm input
Response time	$\leq 1$ $\mu$ s turn-on, I0...I3 fast input $\leq 1$ $\mu$ s turn-off, I0...I3 fast input $\leq 1$ $\mu$ s turn-on, Q0...Q3 fast output $\leq 1$ $\mu$ s turn-off, Q0...Q3 fast output

Configurable filtering time	0.001 ms fast input 0.002 ms fast input 0.005 ms fast input 0.01 ms fast input 0.05 ms fast input 0.1 ms fast input 0.5 ms fast input 1 ms fast input 4 ms fast input 12 ms fast input
Discrete output number	4 transistor fast output
Discrete output voltage	24 V DC
Discrete output current	0.5 A fast output Q0...Q3)
Discrete output type	Transistor
Discrete output logic	Source
Output voltage limits	30 V DC
Maximum current per output common	0.5 A Q0...Q3 fast output
Maximum output frequency	300 KHz
Accuracy	+/- 0.1 % 0.02...0.1 kHz fast output +/- 1 % 0.1...1 kHz fast output
Maximum leakage current	10 MA output
Maximum tungsten load	<1.5 W
Protection type	Short-circuit and overload protection with automatic reset Reverse polarity protection Short-circuit protection
Reset time	200 Ms automatic reset fast output
Maximum number of I/O expansion module	7 TM3 IO module remote 7 TM3 IO module remote 64 TM3, TM5 or TM7 IO island distributed
Execution time for 1 KInstruction	0.005 Ms
Memory capacity	32 MB program RAM 32 MB OS/website RAM 192 MB system memory RAM
Data backed up	1 GB built-in flash memory backup of user programs
Data storage equipment	<= 32 GB SDHC card optional)
Backup time	1000 h 77 °F (25 °C)
Application structure	8 event tasks 4 cyclic master tasks 3 cyclic master tasks + 1 freewheeling task 8 external event tasks
Realtime clock	With
Clock drift	<= 10 s/month 77 °F (25 °C)
Cycle time	0.5 Ms
Positioning functions	Libraries axes coordinated
Integrated connection type	Ethernet 1 RJ45 10/100BASE-T Ethernet 2 2 RJ45 100/1000BASE-T Serial link RJ45 RS232/RS485 Smart Communication Bus TM3 IO bus USB type mini B
Transmission rate	115 kbit/s 49.21 ft (15 m) RS485 115 kbit/s 9.84 ft (3 m) RS232 480 Mbit/s 9.84 ft (3 m) USB 10/100 Mbit/s Ethernet1 10/100/1000 Mbit/s Ethernet2

Communication port protocol	<p>EtherNet/IP adapter  EtherNet/IP scanner  Modbus TCP client/server  Modbus TCP IO scanner  Modbus TCP NVL  Ethernet RSTP  Modbus SL client/server  Modbus SL IO scanner  Modbus SL modem management  Machine Expert  ASCII manager  ASCII modem management</p>
Maximum Number of Connected Devices	<p>EtherNet/IP &lt;64  Modbus TCP &lt;64  Modbus TCP/EtherNet/IP &lt;96</p>
Communication Service	<p>MQTTs  OPC UA server (Encrypt)  HTTPs Methods (API)  Web server  Web visu  TLS 1.2  TLS 1.3  SNTP  NTP client/server  FTP client/server  FTP's server  SQL client (remote access)  DHCP client  DHCP server  DNS client  POP3s client  SMTP client  SNMP client/server</p>
Local signalling	<p>For PWR 1 LED (green/red)  For RUN 1 LED (green/red)  For ERROR (fault) 1 LED (green/red)  For stop forced 1 LED (green/red)  For I/O error (I/O) 1 LED (green/red)  For SD card activity 1 LED (green/orange)  For SL activity 1 LED (green/orange)  For ETH1 state 1 LED (green/red)  For ETH2 state 1 LED (green/red)  For EIP MS 1 LED (green/red)  for EIP NS 1 LED (green/red)</p>
Electrical connection	<p>Removable spring terminal block for inputs and outputs  removable spring terminal block for connecting the 24 V DC power supply</p>
Maximum cable distance between devices	<p>Shielded cable &lt;9.84 ft (3 m) fast input  Shielded cable &lt;9.84 ft (3 m) fast output  Unshielded cable: &lt;50 m for input  Unshielded cable &lt;164.04 ft (50 m) output  Shielded cable &lt;98.43 ft (30 m) RS485 link  Shielded cable &lt;49.21 ft (15 m) RS232</p>
Insulation	<p>Between fast input and internal logic 550 V AC  Non-insulated between inputs  Between fast output and internal logic 500 V AC  Non-insulated between outputs  Between input and output 500 V AC  Between supply and internal logic 500 V AC  Non-insulated between supply and ground</p>
Surge withstand	<p>1 KV power lines (DC) common mode EN/IEC 61000-4-5  1 KV shielded cable common mode EN/IEC 61000-4-5  0.5 KV relay output differential mode EN/IEC 61000-4-5  1 KV input common mode EN/IEC 61000-4-5  1 KV transistor output common mode EN/IEC 61000-4-5</p>
Mounting support	<p>Top hat type TH35-15 rail conforming to IEC 60715  Top hat type TH35-7.5 rail conforming to IEC 60715  plate or panel with fixing kit</p>
Maximum Height	3.94 In (100 mm)
Maximum Depth	3.54 In (90 mm)

Maximum Width	4.92 In (125 mm)
Net Weight	1.44 Lb(US) (0.655 kg)

## Environment

Standards	UL 61010-1 UL 61010-2-201 CSA C22.2 No 61010-1 CSA C22.2 No 61010-2-201 CSA C22.2 No 213 ANSI/ISA 12-12-01 EN 61131-2
Product Certifications	CE CULus CULus HazLoc Class I Division 2 CSA 22-2 No 213 RCM EAC Achilles KC
Resistance to electrostatic discharge	4 KV on contact EN/IEC 61000-4-2 8 KV on air EN/IEC 61000-4-2
Resistance to electromagnetic fields	9.14 V/M (10 V/m) 80 MHz...1 GHz EN/IEC 61000-4-3 2.74 V/M (3 V/m) 1.4 GHz...2 GHz EN/IEC 61000-4-3 0.91 V/M (1 V/m) 2 GHz...3 GHz EN/IEC 61000-4-3
Resistance to fast transients	2 KV EN/IEC 61000-4-4 power lines) 1 KV EN/IEC 61000-4-4 Ethernet line) 1 KV EN/IEC 61000-4-4 serial link) 1 KV EN/IEC 61000-4-4 input) 1 KV EN/IEC 61000-4-4 transistor output)
Resistance to conducted disturbances	10 V 0.15...80 MHz EN/IEC 61000-4-4 3 V 0.1...80 MHz 10 V spot frequency (2, 3, 4, 6.2, 8.2, 12.6, 16.5, 18.8, 22, 25 MHz)
Electromagnetic emission	Conducted emissions 120...69 dB $\mu$ V/m QP power lines)10...150 kHz EN/IEC 55011 Conducted emissions 63 dB $\mu$ V/m QP power lines)1.5...30 MHz EN/IEC 55011 Radiated emissions 40 dB $\mu$ V/m30...230 kHz EN/IEC 55011 Conducted emissions 79...63 dB $\mu$ V/m QP power lines)150...1500 kHz EN/IEC 55011 Radiated emissions230...1000 MHz EN/IEC 55011
Immunity to microbreaks	0.01 Ms
Ambient air temperature for operation	-4...140 °F (-20...60 °C) horizontal installation) -4...122 °F (-20...50 °C) vertical installation) -4...113 °F (-20...45 °C) flat mounting)
Ambient Air Temperature for Storage	-40...185 °F (-40...85 °C)
Relative humidity	10...95 %, without condensation in operation) 10...95 %, without condensation in storage)
IP degree of protection	IP20
Pollution degree	2
Operating altitude	0...6561.68 ft (0...2000 m)
Storage altitude	0.00...9842.52 Ft (0...3000 m)
Vibration resistance	3.5 mm 2...8.4 Hz symmetrical rail 1 gn 8.4...200 Hz symmetrical rail 3.5 mm 2...8.4 Hz panel mounting 1 gn 8.4...200 Hz panel mounting
Shock resistance	15 gn 11 ms

## Ordering and shipping details

Category	22534 - MODICON M262
Discount Schedule	MSX
GTIN	03606489604189
Nbr. of units in pkg.	1
Package weight(Lbs)	29.45 Oz (835 g)
Returnability	Yes
Country of origin	ID


## Packing Units

Unit Type of Package 1	PCE
Package 1 Height	5.43 In (13.8 cm)
Package 1 width	7.20 In (18.3 cm)
Package 1 Length	5.16 In (13.1 cm)

## Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End Of Life Information</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
PVC free	Yes


Side and Front Views

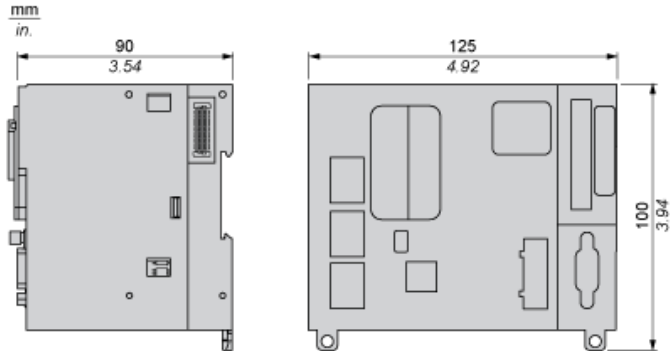

---

Correct Mounting Position


---

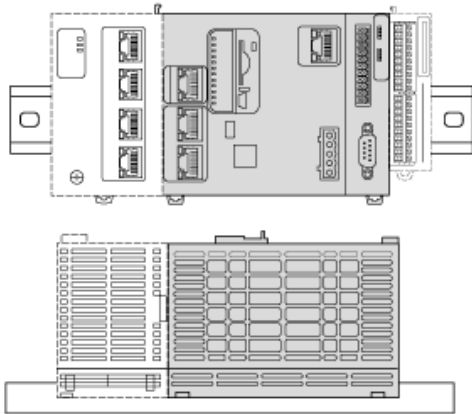

---

Acceptable Mounting Position


---


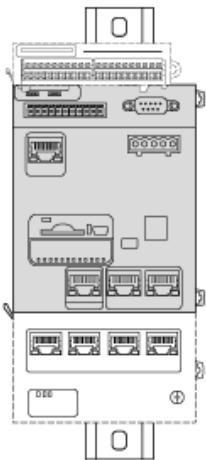


---



Incorrect Mounting Positions

---

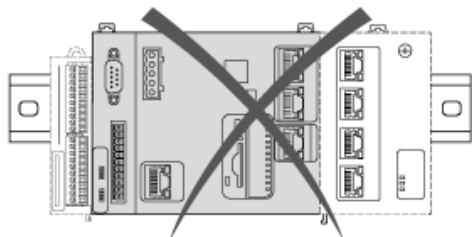


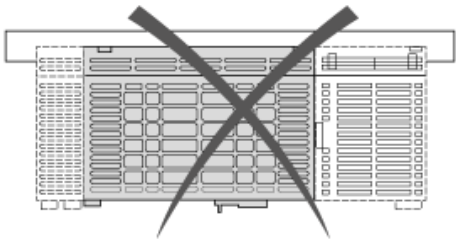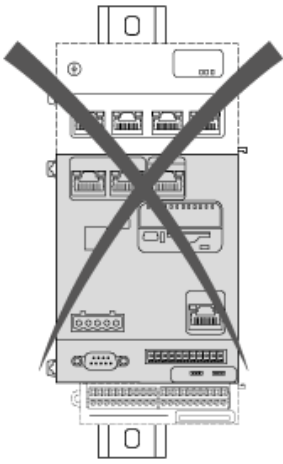

## Minimum Clearances

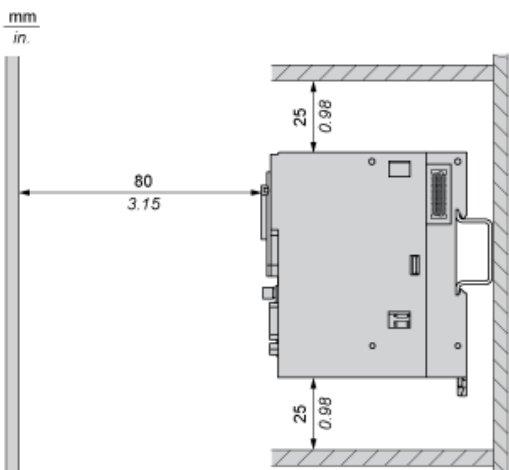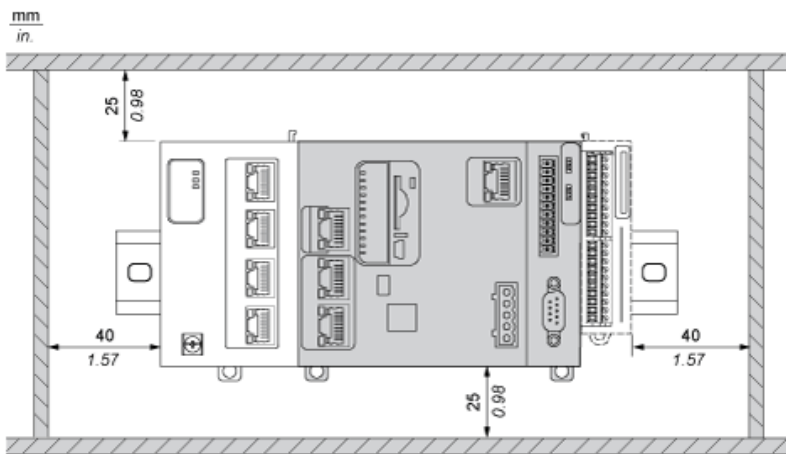


Encoder RS422 / 24 VDC

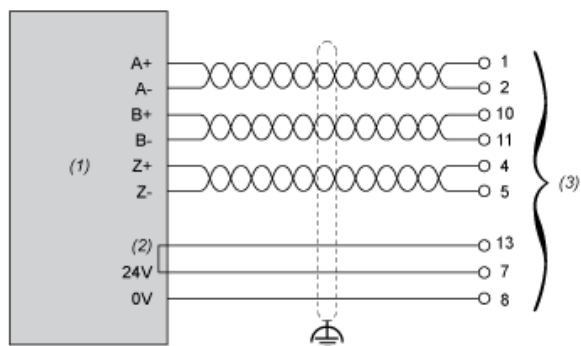


- (1) Encoder
- (2) Return Option
- (3) Encoder Sub-D

Encoder RS422 / 5 VDC or Push Pull

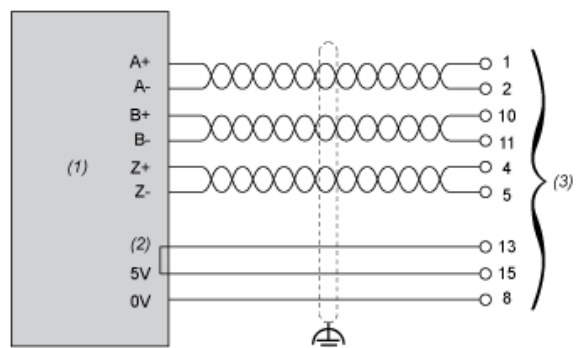

- (1) Encoder
- (2) Return Option
- (3) Encoder Sub-D

Encoder SSI

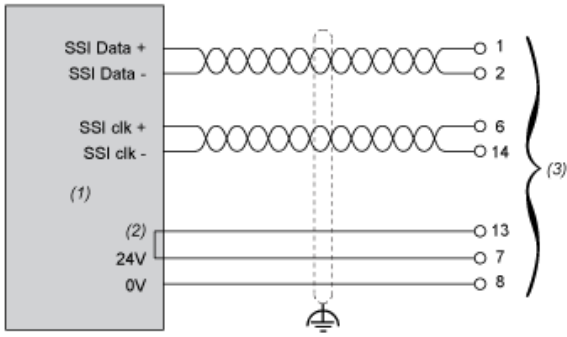

- (1) Encoder
- (2) Return Option
- (3) Encoder Sub-D

Product Life Status : **Commercialised**