

Product availability: Non-Stock - Not normally stocked in distribution facility

Price*: 2080.00 USD



Main

Range of product	Logic/Motion controller - Modicon M262
Product or Component Type	Motion controller
Discrete I/O number	8
Upstream connectivity	IIoT-ready machine to cloud Connected machine to plant

Complementary

Inrush current	40 A
Overvoltage protection	With
Discrete input voltage	24 V
Discrete input voltage type	DC
Discrete output type	Transistor
Discrete output logic	Source
Application structure	8 event tasks 4 cyclic master tasks 3 cyclic master tasks + 1 freewheeling task 8 external event tasks
Realtime clock	With

Communication Service	MQTTs OPC UA server (Encrypt) HTTPs Methods (API) Web server Web visu TLS 1.2 TLS 1.3 SNTP NTP client/server FTP client/server FTPs server SQL client (remote access) DHCP client DHCP server DNS client POP3s client SMTP client SNMP client/server
Encoder type	Incremental encoder
Height	3.94 In (100 mm)
Depth	3.54 In (90 mm)
Width	4.92 In (125 mm)
Product Weight	1.48 Lb(US) (0.67 kg)

Environment

Product Certifications	CE CULus CULus HazLoc Class I Division 2 CSA 22-2 No 213 RCM EAC Achilles KC
Immunity to microbreaks	0.01 Ms
Ambient Air Temperature for Storage	-40...185 °F (-40...85 °C)
Pollution degree	2
Operating altitude	0...6561.68 ft (0...2000 m)
Storage altitude	0.00...9842.52 Ft (0...3000 m)

Ordering and shipping details

Category	22534 - MODICON M262
Discount Schedule	MSX
GTIN	3606489604202
Nbr. of units in pkg.	1
Package weight(Lbs)	29.98 Oz (850 g)
Returnability	Yes
Country of origin	ID


Packing Units

Unit Type of Package 1	PCE
Package 1 Height	5.43 In (13.8 cm)
Package 1 width	7.20 In (18.3 cm)
Package 1 Length	5.16 In (13.1 cm)


Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
PVC free	Yes


Side and Front Views

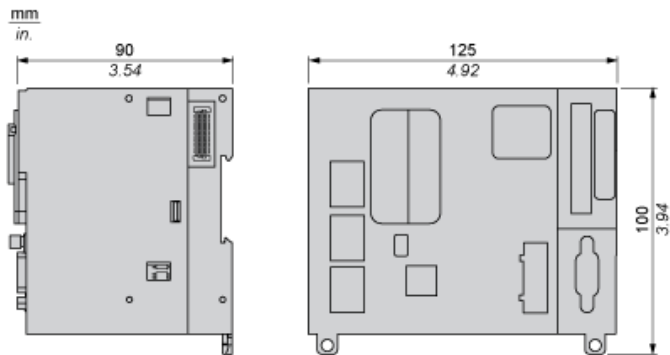


Correct Mounting Position


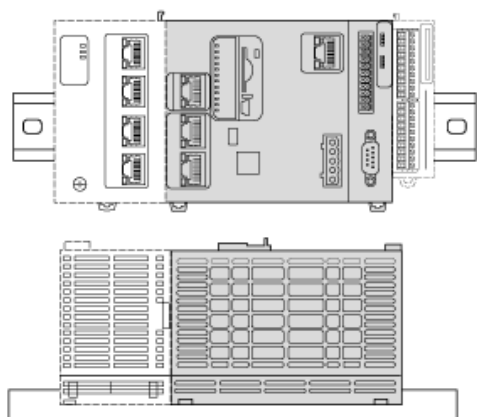


Acceptable Mounting Position


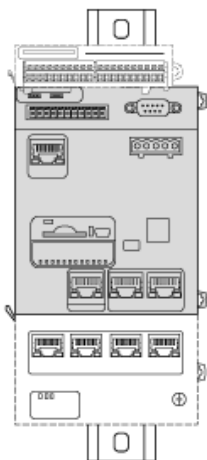


Incorrect Mounting Positions

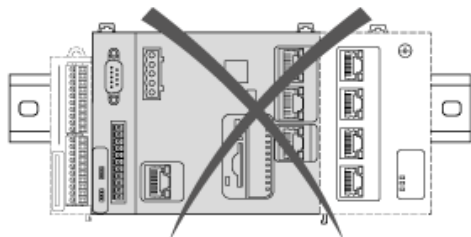


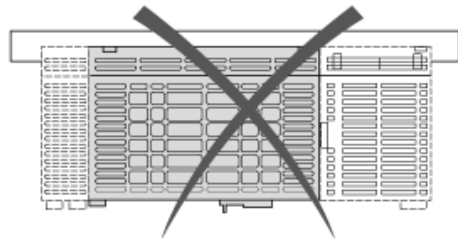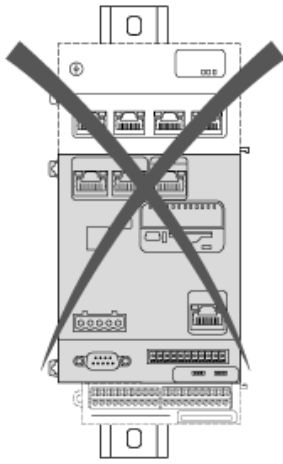

Minimum Clearances

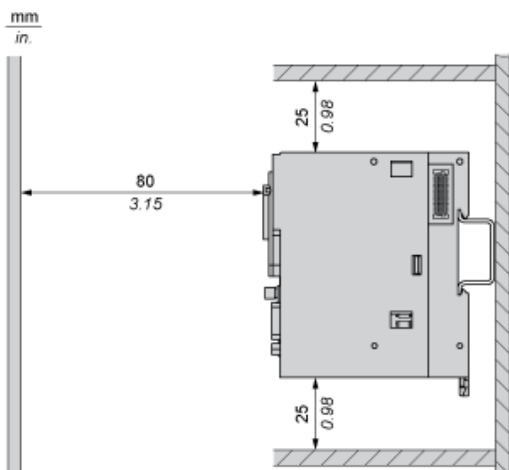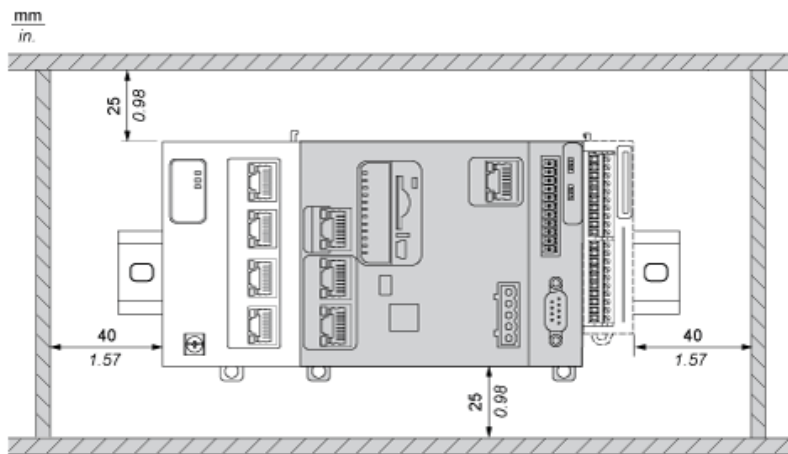


Encoder RS422 / 24 VDC

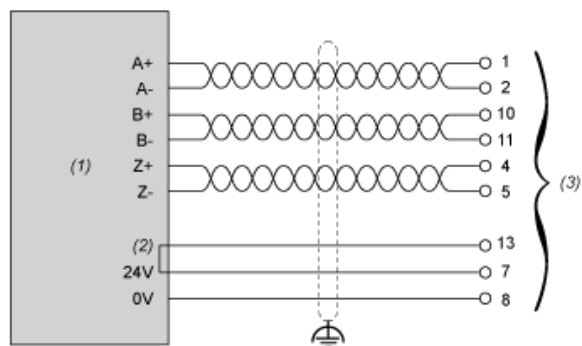


- (1) Encoder
- (2) Return Option
- (3) Encoder Sub-D

Encoder RS422 / 5 VDC or Push Pull

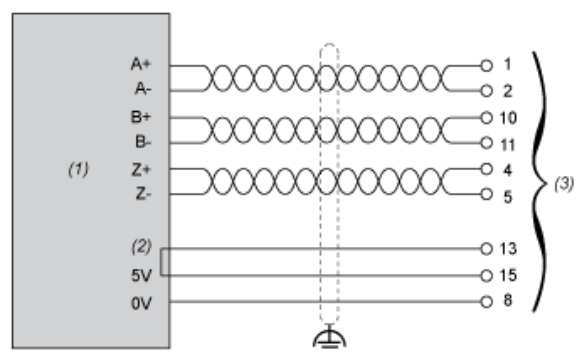

- (1) Encoder
- (2) Return Option
- (3) Encoder Sub-D

Encoder SSI

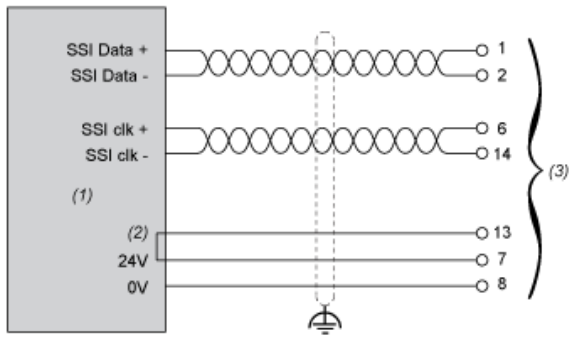

- (1) Encoder
- (2) Return Option
- (3) Encoder Sub-D

Product Life Status : **Commercialised**