

Product availability: Non-Stock - Not normally stocked in distribution facility

Price*: 199.00 USD



Main

| | |
|---------------------------|--|
| Range of product | Modicon TM3 |
| Product or Component Type | Discrete output module |
| Range Compatibility | Modicon M241 Modicon M251 Modicon M221 Modicon M262 |
| Discrete output type | Transistor |
| Discrete output logic | Negative logic (sink) |

Complementary

| | |
|---------------------|------------------------|
| Discrete I/O number | 32 |
| Marking | CE |
| Height | 3.54 In (90 mm) |
| Depth | 3.20 In (81.3 mm) |
| Width | 1.32 In (33.5 mm) |
| Product Weight | 0.25 Lb(US) (0.112 kg) |

Environment

| | |
|-------------------------------------|--------------------------------------|
| Standards | EN/IEC 61010-2-201 EN/IEC 61131-2 |
| Product Certifications | CULus C-tick |
| Ambient Air Temperature for Storage | -13...158 °F (-25...70 °C) |
| Pollution degree | 2 |
| Operating altitude | 0...6561.68 ft (0...2000 m) |
| Storage altitude | 0.00...9842.52 Ft (0...3000 m) |

Ordering and shipping details

| | |
|-----------------------|--------------------------------|
| Category | 22533 - M2XX PLC & ACCESSORIES |
| Discount Schedule | MSX |
| GTIN | 3606480611612 |
| Nbr. of units in pkg. | 1 |
| Package weight(Lbs) | 7.76 Oz (220 g) |
| Returnability | No |
| Country of origin | TW |


Packing Units

| | |
|------------------------|---------------------|
| Unit Type of Package 1 | PCE |
| Package 1 Height | 2.99 In (7.594 cm) |
| Package 1 width | 4.19 In (10.647 cm) |
| Package 1 Length | 5.03 In (12.775 cm) |

Offer Sustainability


| | |
|----------------------------|---|
| Sustainable offer status | Green Premium product |
| California proposition 65 | WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |
| REACH Regulation | REACH Declaration |
| REACH free of SVHC | Yes |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Toxic heavy metal free | Yes |
| Mercury free | Yes |
| RoHS exemption information | Yes |
| China RoHS Regulation | China RoHS Declaration |
| Environmental Disclosure | Product Environmental Profile |
| Circularity Profile | End Of Life Information |
| WEEE | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins. |
| PVC free | Yes |

Dimensions

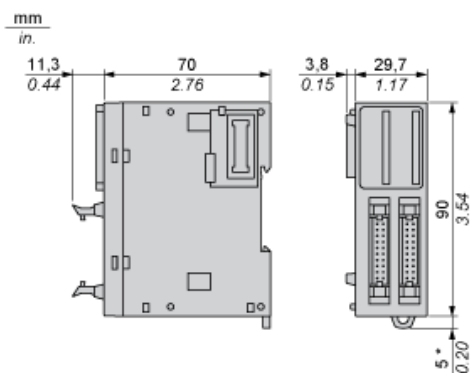


(*) 8.5 mm/0.33 in. when the clamp is pulled out.


Spacing Requirements

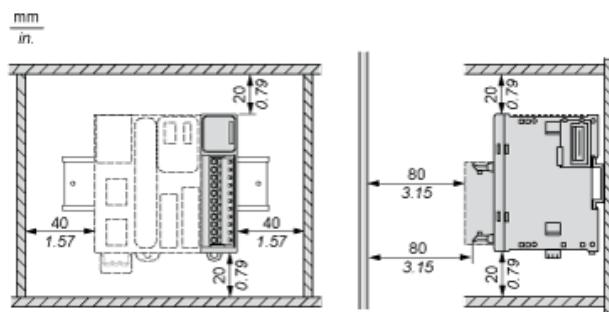


Mounting on a Rail

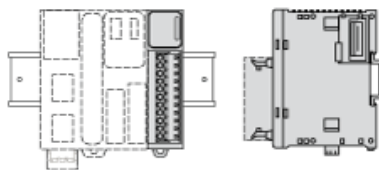

Incorrect Mounting

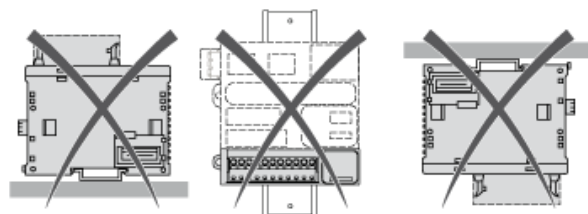


Mounting on a Panel Surface




(1) Install a mounting strip

Mounting Hole Layout

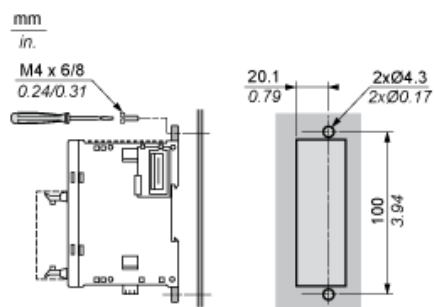

Digital Transistor Output Module (32-channel, Sink)

Wiring Diagram

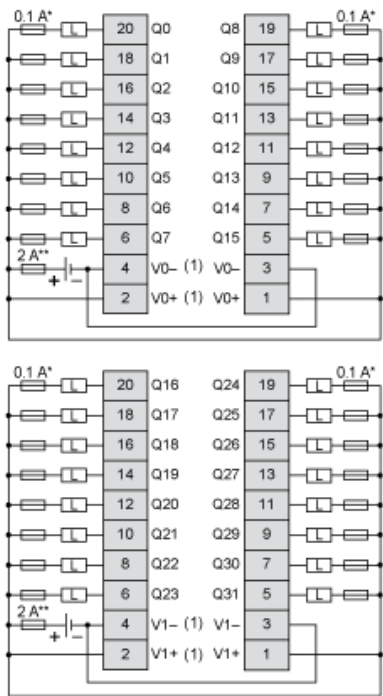

- (*) Type T Fuse
- (**) Type F Fuse
- (1) The V0+ terminals are connected internally.
The V0- terminals are connected internally.
The V1+ terminals are connected internally.
The V1- terminals are connected internally.
The V0+ and V1+ terminals are not connected internally.
The V0- and V1- terminals are not connected internally.

Product Life Status : Commercialised