

Product data sheet


Characteristics

VLS3P025D1

Disconnect switch, TeSys VLS, body switch, 25A, 15HP at 480VAC, UL508, three phase, 5kA SCCR, size 1, door mount

Product availability: Stock - Normally stocked in distribution facility

Price*: 49.30 USD

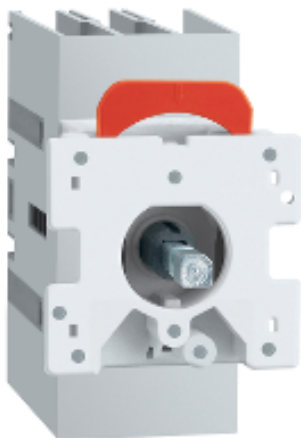

Main

Range	TeSys
Product name	TeSys VARIO LS
Device short name	VLS3P
Product or Component Type	Switch body

Complementary

Mounting Support	Door
Performance level	High performance
Poles description	3P
Contacts type and composition	3 NO
Color	Gray
[Ue] rated operational voltage	600 V AC 50/60 Hz conforming to UL 508
Network type	AC
Network Frequency	50/60 Hz
Maximum Horse Power Rating	7.5 Hp 200/208 V AC 7.5 Hp 240 V AC 15 Hp 480 V AC 20 Hp 600 V AC 1.5 Hp 120 V AC 3 Hp 240 V AC
[Ue] rated operational voltage	690 V AC 50/60 Hz
Rated operational power in W	11 KW 400 V AC-23A) 15 KW 500 V AC-23A) 22 KW 690 V AC-23A)
[Ie] rated operational current	25 A Ue: 600 V UL 508 25 A AC-21A Ue: 400 V 25 A AC-21A Ue: 500 V 25 A AC-21A Ue: 690 V 25 A AC-22A Ue: 400 V 25 A AC-22A Ue: 500 V 25 A AC-22A Ue: 690 V 25 A AC-23A Ue: 400 V 25 A AC-23A Ue: 500 V 25 A AC-23A Ue: 690 V

[Ith] conventional free air thermal current	25 A 131 °F (55 °C)
[Ithe] conventional enclosed thermal current	25 A
Making capacity	250 A 690 V AC-23A 37.5 A 690 V AC-21A 75 A 690 V AC-22A
Breaking capacity	37.5 A 690 V AC-21A) 75 A 690 V AC-22A) 200 A 690 V AC-23A)
Product compatibility	Fuse RK5 30 A maximum: 5 kA at 600 V AC
Rated conditional short-circuit current	50 KA 400 V 25 A gG
[Icm] rated short-circuit making capacity	1128 A 690 V
Intermittent duty class	Class 120 - 60 %
[Uimp] rated impulse withstand voltage	8 KV
[Icw] rated short-time withstand current	800 A 690 V 1 s
Mechanical durability	100000 Cycles
Electrical durability	100000 Cycles AC-21A
AWG gauge	AWG 18...AWG 6 copper
Connections - terminals	Power circuit screw clamp terminals 0.02 in ² (10 mm ²) solid Power circuit screw clamp terminals 0.02 in ² (16 mm ²) flexible - without cable end
Tightening torque	Power circuit 15.93...17.70 lbf.in (1.8...2 N.m) screw clamp terminals
Maximum Height	2.87 In (73 mm)
Maximum Width	1.77 In (45 mm)
Maximum Depth	3.07 In (78 mm)
Net Weight	0.30 Lb(US) (0.135 kg)

Environment

Standards	UL 508 CSA C22.2 No 14 IEC 60947-3
Product Certifications	CULus GL
IP degree of protection	IP20 conforming to IEC 60529
Mechanical robustness	Vibrations 2...100 Hz Fc 0.7 g) IEC 60068-2-6 Shocks 11 ms Ea 15 gn) IEC 60068-2-27
Ambient Air Temperature for Operation	-13...131 °F (-25...55 °C)
Fire resistance	1760 °F (960 °C) IEC 60695-2-11

Ordering and shipping details

Category	21734 - TESYS VLS DISCONNECT SWITCHES
Discount Schedule	CP1
GTIN	03606481156525
Nbr. of units in pkg.	1
Package weight(Lbs)	6.84 Oz (194 g)
Returnability	Yes
Country of origin	IT

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	3.15 In (8 cm)
Package 1 width	3.35 In (8.5 cm)
Package 1 Length	4.72 In (12 cm)

Offer Sustainability

REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration

Product Life Status :	Commercialised
-----------------------	----------------