

# Product data sheet

## Characteristics

# XU2M18AP20D

Photoelectric sensors XU, XU2, thru beam, high gain, Sn 50 m, 12...24 VDC, M12



Product availability: Stock - Normally stocked in distribution facility

Price\*: 239.00 USD



### Main

Range of Product	Telemecanique Photoelectric sensors XU
Series name	Application material handling
Electronic sensor type	Photo-electric sensor
Sensor name	XU2
Sensor design	Cylindrical M18
Detection system	Thru beam
Material	Metal
Line of sight type	Axial
Type of output signal	Discrete Analogue
Supply circuit type	DC
Wiring Technique	3-wire
Discrete output type	PNP
Discrete output function	1 NO
Analogue output range	4...20 mA
Electrical connection	1 male connector M12, 4 pins
Product Specific Application	-
Emission	Infrared thru beam
[Sn] nominal sensing distance	164.04 Ft (50 m) thru beam

### Complementary

Enclosure Material	Nickel Plated Brass
Lens material	PMMA
Maximum sensing distance	229.66 Ft (70 m)
Output Type	Solid state
Add on output	With analogue output
Add on input	Breaking test (transmitter)
Status LED	1 LED green)supply on 1 LED yellow)operation
[Us] rated supply voltage	12...24 V DC with reverse polarity protection

Supply voltage limits	10...30 V DC
Switching capacity in mA	<= 100 mA overload and short-circuit protection)
Switching frequency	<= 30 Hz
Maximum voltage drop	<1.5 V closed state)
Current consumption	<= 55 mA no-load
Maximum delay first up	50 Ms
Maximum delay response	15 Ms
Maximum delay recovery	15 Ms
Setting-up	Sensitivity adjustment
Diameter	0.71 In (18 mm)
Length	3.74 In (95 mm)
Net Weight	0.34 Lb(US) (0.155 kg)
Kit composition	Transmitter + receiver

## Environment

Product Certifications	CSA CE UL
Ambient air temperature for operation	-13...131 °F (-25...55 °C)
Ambient Air Temperature for Storage	-40...158 °F (-40...70 °C)
Vibration resistance	25 gn +/- 2 mm 10...55 Hz) IEC 60068-2-6
Shock resistance	30 gn 11 ms) IEC 60068-2-27
IP degree of protection	IP67 conforming to IEC 60529

## Ordering and shipping details

Category	22481 - SENSORS, PHOTOELECTRIC
Discount Schedule	DS2
GTIN	03389110077254
Nbr. of units in pkg.	1
Package weight(Lbs)	5.64 Oz (160 g)
Returnability	Yes
Country of origin	FR

## Packing Units

Unit Type of Package 1	PCE
Package 1 Height	1.61 In (4.1 cm)
Package 1 width	3.70 In (9.4 cm)
Package 1 Length	5.12 In (13 cm)
Unit Type of Package 2	S02
Number of Units in Package 2	22
Package 2 Weight	8.60 Lb(US) (3.902 kg)
Package 2 Height	5.91 In (15 cm)
Package 2 width	11.81 In (30 cm)
Package 2 Length	15.75 In (40 cm)

## Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Diisodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End Of Life Information</a>

## Contractual warranty

Warranty	18 months
----------	-----------



---

Mounting and Clearance


---

Fixing nut tightening torque: 15 N.m

Connector tightening torque: 2 N.m

Wiring Schemes


Receiver

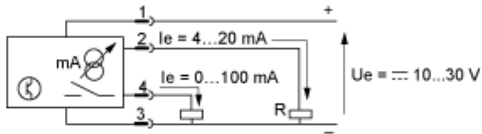


$R_{max} < 800 \Omega$  ( $U_e = 24 V$ ),  $< 300 \Omega$  ( $U_e = 12 V$ )

Beam Break Test (only on Transmitter)

Beam made




Beam broken




Sensor Connector Pin View

Transmitter



(a) Test

Receiver




(a) Analogue output

(b) Solid-state output


Operation, Settings

Type, opacity of object Analogue output curve Switching level of digital solid-state PNP output

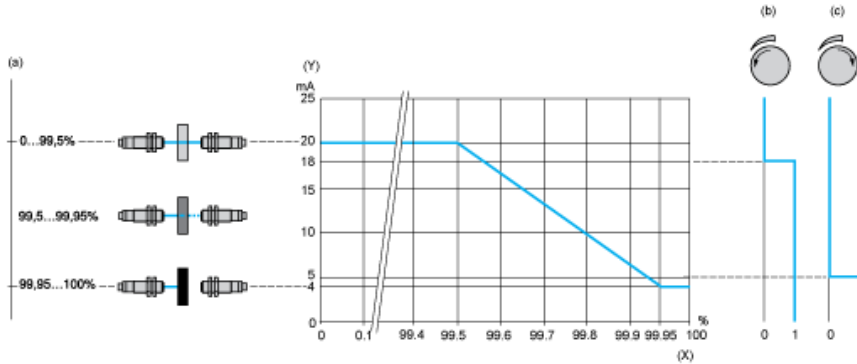

- (a) Degree of opacity of object
- (b) Potentiometer set at minimum
- (c) Potentiometer set at maximum
- (y) Output current
- (x) Degree of opacity of object

Type, opacity of object Analogue output curve Switching level of digital solid-state PNP output

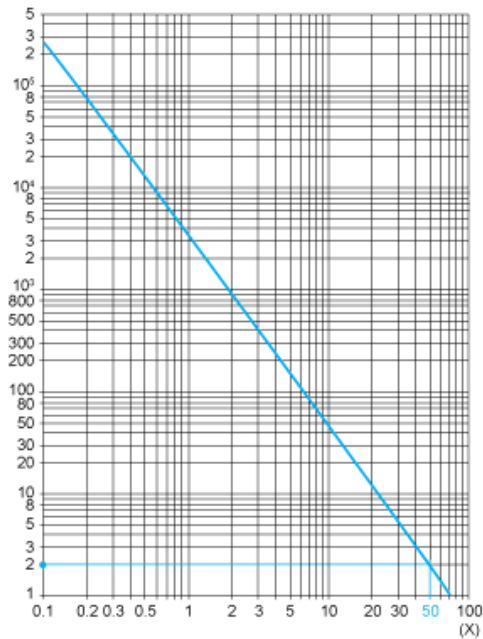

- (a) Degree of opacity of object
- (b) Potentiometer set at minimum
- (c) Potentiometer set at maximum
- (y) Output current
- (x) Degree of opacity of object

Product Life Status : **Commercialised**