

# Product data sheet

## Characteristics

# XUYPCO925L1ANSP

Photoelectric sensors XU, XUY, diffuse, analog  
laser, Sn 60 mm, 12...24 VDC, M12

Product availability: Non-Stock - Not normally stocked in distribution facility

Price\*: 1589.00 USD



### Main

Range of Product	Telemecanique Photoelectric sensors XU
Series name	Application material handling
Electronic sensor type	Photo-electric sensor
Sensor name	XUY
Sensor design	Compact 50 x 50
Detection system	Diffuse
Material	Plastic
Supply circuit type	DC
Wiring Technique	4-wire
Analogue output range	0...10 V
Electrical connection	1 male connector M12, 4 pins
Product Specific Application	Position control of robot arm Measuring thickness of mechanical parts
Emission	Red laser, pulsed 0.000025591 in (650 nm) - class 1 IEC 825-1
[Sn] nominal sensing distance	1.57...2.36 in (40...60 mm)

### Complementary

Enclosure Material	ABS, anti-shock
Pulse frequency	6 KHz
Linearity	< 1 %
Spot diameter	0.04 in (1 mm) at 50 mm
Spot dimension	Ø 1 mm at 50 mm
Resolution	7 µm
Status LED	Supply on: 1 LED (green) Dirty 1 LED red)
[Us] rated supply voltage	24 V DC reverse polarity protection
Supply voltage limits	18...28 V DC
Switching capacity in mA	3 mA overload and short-circuit protection)
Switching frequency	< 40 Hz
Maximum voltage drop	<2.4 V closed state)
Current consumption	35 mA no-load

Maximum delay response	30 Ms output circuit
Setting-up	Parametering by buttons
Net Weight	0.13 Lb(US) (0.057 kg)

## Environment

Product Certifications	CE
Ambient Air Temperature for Operation	32...113 °F (0...45 °C)
Ambient Air Temperature for Storage	-4...140 °F (-20...60 °C)
Immunity to ambient light	5000 Lux natural light
Vibration resistance	7 gn +/- 1.5 mm 10...55 Hz) IEC 60068-2-6
Shock resistance	30 gn 11 ms) IEC 60068-2-27
IP degree of protection	IP67 conforming to IEC 60529

## Ordering and shipping details

Category	22481 - SENSORS, PHOTOELECTRIC
Discount Schedule	DS2
GTIN	03389119009812
Nbr. of units in pkg.	1
Package weight(Lbs)	1.27 Oz (36 g)
Returnability	No
Country of origin	DE

## Packing Units

Unit Type of Package 1	PCE
Package 1 Height	1.18 In (3 cm)
Package 1 width	2.36 In (6 cm)
Package 1 Length	3.94 In (10 cm)
Unit Type of Package 2	S01
Number of Units in Package 2	10
Package 2 Weight	25.40 Oz (720 g)
Package 2 Height	5.91 In (15 cm)
Package 2 width	5.91 In (15 cm)
Package 2 Length	15.75 In (40 cm)


## Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Diisobutyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	 <a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	 <a href="#">Yes</a>

## Contractual warranty

Warranty	18 months
----------	-----------

Dimensions

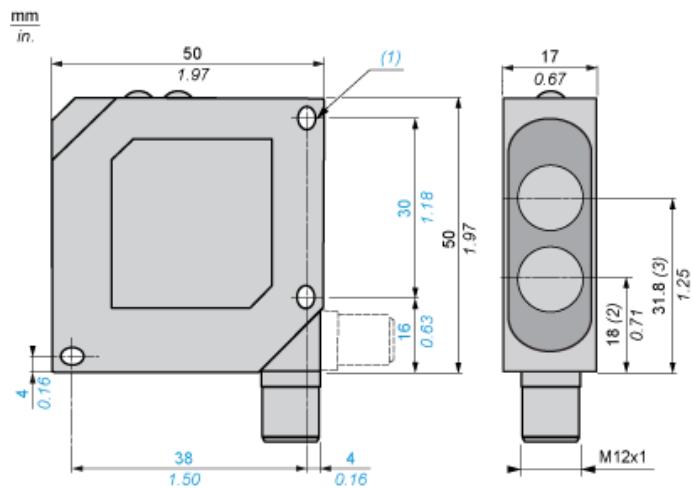


(1) 2 elongated holes Ø 4.3 x 4  
(2) Transmitter optical axis  
(3) Receiver optical axis

---

### Wiring Schemes


---

M12



1 : Brown  
2 : White  
3 : Blue  
4 : Black

PNP Output




(+) BN Brown  
WH : White  
(-) BU Blue  
BK : Black  
(1) Shielding

NOTE: Shielded cable recommended

---

Adjustment Curves

---

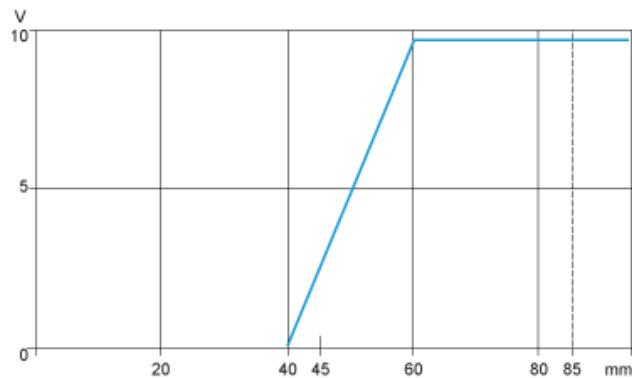

Product Life Status : **Commercialised**