

Product data sheet

Characteristics

XVR13G04L

Harmony XVR, Rotating beacon, Ø130, red, without buzzer, 120 V AC



Product availability: Stock - Normally stocked in distribution facility

Price*: 207.00 USD



Main

Range of product	Harmony XVR
Product or component type	Prewired rotating mirror beacon
Sound signalling	Without
Device short name	XVR
Mounting diameter	5.12 In (130 mm)
IP degree of protection	IP66 conforming to IEC 60529 IP67 conforming to IEC 60529
[Us] rated supply voltage	120 V AC
Light source	High luminosity LED, red

Complementary

Material	ABS (acrylonitrile butadiene-styrene) body part PC globe
CAD overall width	5.12 In (130 mm)
CAD overall depth	5.12 In (130 mm)
Net weight	2.18 Lb(US) (0.99 kg)
Marking	CE
Product mounting	By 3 M6 screws
[Uimp] rated impulse withstand voltage	4 KV
Current consumption	42 mA
Flashing frequency	2.7 Hz
Clamping connection capacity	1.25 mm ²
AWG gauge	AWG 18
Cable length	15.75 In (400 mm)

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. *Prices are indicative. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Environment

Standards	EN/IEC 60947-5-1 EN/IEC 60947-1
Protective treatment	TC
Ambient air temperature for storage	-31...158 °F (-35...70 °C)
Ambient air temperature for operation	-22...122 °F (-30...50 °C)
Electrical shock protection class	Class II IEC 61140

Ordering and shipping details

Category	22617 - XVC TOWER LIGHTS
Discount Schedule	XV
GTIN	03389119045308
Nbr. of units in pkg.	1
Package weight(Lbs)	2.93 Lb(US) (1.328 kg)
Returnability	Yes
Country of origin	ID

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	12.01 In (30.5 cm)
Package 1 width	7.87 In (20 cm)
Package 1 Length	7.87 In (20 cm)
Unit Type of Package 2	S04
Number of Units in Package 2	6
Package 2 Weight	20.30 Lb(US) (9.21 kg)
Package 2 Height	11.81 In (30 cm)
Package 2 width	15.75 In (40 cm)
Package 2 Length	23.62 In (60 cm)

Offer Sustainability


Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	 REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	 Yes
China RoHS Regulation	 China RoHS Declaration
Environmental Disclosure	 Product Environmental Profile
Circularity Profile	 End Of Life Information

Contractual warranty

Warranty	18 months
----------	-----------


Rotating Mirror Beacon

Dimensions

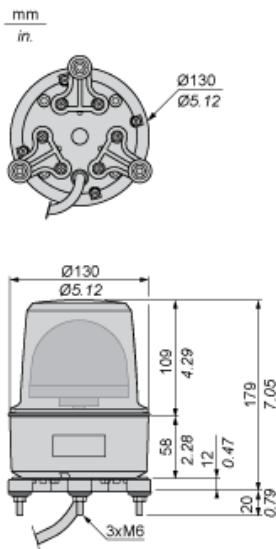

Rotating Mirror Beacon

Panel Cut-out



Product Life Status : **Commercialised**