

Product data sheet

Characteristics

XZCPV0566L2

Pre wired connectors XZ, straight female, M8, 3 pins, cable PVC 2 m

Product availability: Stock - Normally stocked in distribution facility

Price*: 15.00 USD



Main

| | |
|------------------------------------|----------------------------------|
| Range of product | Telemecanique Cabling components |
| Accessory / separate part category | Cabling accessory |
| Accessory / separate part type | Pre-wired connectors |
| Series name | General purpose |

Complementary

| | |
|--------------------------------|--------------------------------------|
| Electrical connection | Straight female connector M8, 3 pins |
| Cable connector fixing | Screw-on |
| Collar material | Metal |
| Status LED | Without |
| Cable length | 6.56 Ft (2 m) |
| Cable outer diameter | 0.18 In (4.6 mm) |
| Cable composition | 3 x 0.25 mm ² |
| Wire insulation material | PVC |
| [Ue] rated operational voltage | 60 V AC 75 V DC |
| Line Rated Current | 3 A |
| Contact resistance | 5000 MOhm |
| Minimum insulating resistance | 1 GΩ |
| Net Weight | 0.19 Lb(US) (0.084 kg) |

Environment

| | |
|---------------------------------------|-----------------------------------|
| IP degree of protection | IP65 IP67 |
| Product certifications | CULus |
| Ambient air temperature for operation | -13...176 °F (-25...80 °C) static |
| Ambient air temperature for storage | -13...176 °F (-25...80 °C) |

Ordering and shipping details

| | |
|-----------------------|------------------------|
| Category | 22483 - MACHINE CABLES |
| Discount Schedule | DS3 |
| GTIN | 03389119073417 |
| Nbr. of units in pkg. | 1 |
| Package weight(Lbs) | 2.54 Oz (72 g) |
| Returnability | Yes |
| Country of origin | CZ |

Packing Units

| | |
|------------------------|------------------|
| Unit Type of Package 1 | PCE |
| Package 1 Height | 0.59 In (1.5 cm) |
| Package 1 width | 6.30 In (16 cm) |
| Package 1 Length | 6.30 In (16 cm) |


Offer Sustainability

| | |
|----------------------------|---|
| California proposition 65 | WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |
| REACH Regulation | REACH Declaration |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Mercury free | Yes |
| RoHS exemption information | Yes |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|


Dimensions

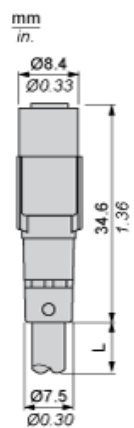

L : Length of cable

Connections and Schemes

Connector



BU : Blue
BN : Brown
BK : Black

| | |
|-----------------------|----------------|
| Product Life Status : | Commercialised |
|-----------------------|----------------|