

# Product data sheet

## Characteristics

# XZCPV1340L2

Pre wired connectors XZ, elbowed female, M12, 3 pins, cable PVC 2 m

Product availability: Stock - Normally stocked in distribution facility

Price\*: 20.00 USD



### Main

|                                    |                                  |
|------------------------------------|----------------------------------|
| Range of product                   | Telemecanique Cabling components |
| Accessory / separate part category | Cabling accessory                |
| Accessory / separate part type     | Pre-wired connectors             |
| Series name                        | General purpose                  |

### Complementary

|                                |                                      |
|--------------------------------|--------------------------------------|
| Electrical connection          | Elbowed female connector M12, 3 pins |
| Cable connector fixing         | Screw-on                             |
| Collar material                | Metal                                |
| Status LED                     | 2 PNP LEDs                           |
| Cable length                   | 6.56 Ft (2 m)                        |
| Cable outer diameter           | 0.18 In (4.6 mm)                     |
| Cable composition              | 3 x 0.25 mm <sup>2</sup>             |
| Wire insulation material       | PVC                                  |
| [Ue] rated operational voltage | 30 V AC<br>36 V DC                   |
| Line Rated Current             | 3 A                                  |
| Contact resistance             | 5000 MOhm                            |
| Minimum insulating resistance  | 1 GΩ                                 |
| Net weight                     | 0.20 Lb(US) (0.09 kg)                |

### Environment

|                                       |                                   |
|---------------------------------------|-----------------------------------|
| IP degree of protection               | IP67<br>IP65                      |
| Product certifications                | CULus                             |
| Ambient air temperature for operation | -13...176 °F (-25...80 °C) static |
| Ambient air temperature for storage   | -13...176 °F (-25...80 °C)        |

## Ordering and shipping details

|                       |                        |
|-----------------------|------------------------|
| Category              | 22483 - MACHINE CABLES |
| Discount Schedule     | DS3                    |
| GTIN                  | 03389119073622         |
| Nbr. of units in pkg. | 1                      |
| Package weight(Lbs)   | 2.68 Oz (76 g)         |
| Returnability         | Yes                    |
| Country of origin     | PL                     |

## Packing Units

|                        |                 |
|------------------------|-----------------|
| Unit Type of Package 1 | PCE             |
| Package 1 Height       | 0.79 In (2 cm)  |
| Package 1 width        | 7.09 In (18 cm) |
| Package 1 Length       | 7.09 In (18 cm) |


## Offer Sustainability

|                            |  |
|----------------------------|--|
| California proposition 65  | WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Diisodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> |
| REACH Regulation           | <a href="#">REACH Declaration</a>  |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>   |
| Mercury free               | Yes  |
| RoHS exemption information | <a href="#">Yes</a>  |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Dimensions

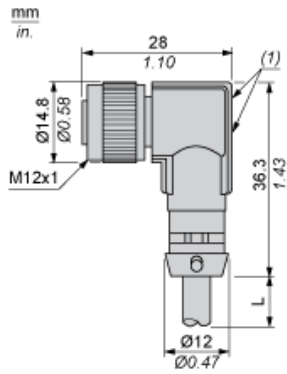


- L : Length of cable
- (1) 2 LEDs limited to 10...30 VDC max.

---

Connections and Schemes

---

Connector




BU : Blue  
BN : Brown  
BK : Black

---

Connections and Schemes

---

LED Connection



BN : Brown  
BK : Black  
BU : Blue  
GN : Green  
YW : Yellow  
(1) Signal

|                       |                |
|-----------------------|----------------|
| Product Life Status : | Commercialised |
|-----------------------|----------------|