

Product data sheet

Characteristics

XZCPV1564L1

Pre wired connectors XZ, straight male, M12, 5 pins, cable PVC 1 m

Product availability: Non-Stock - Not normally stocked in distribution facility

Price*: 36.00 USD



Main

| | |
|------------------------------------|----------------------------------|
| Range of product | Telemecanique Cabling components |
| Accessory / separate part category | Cabling accessory |
| Accessory / separate part type | Pre-wired connectors |
| Series name | General purpose |

Complementary

| | |
|--------------------------------|-------------------------------------|
| Electrical connection | Straight male connector M12, 5 pins |
| Cable connector fixing | Screw-on |
| Collar material | Metal |
| Status LED | Without |
| Cable length | 3.28 Ft (1 m) |
| Cable outer diameter | 0.20 In (5.2 mm) |
| Cable composition | 5 x 0.25 mm ² |
| Wire insulation material | PVC |
| [Ue] rated operational voltage | 60 V AC 75 V DC |
| Line Rated Current | 3 A |
| Contact resistance | 5000 MOhm |
| Minimum insulating resistance | 1 GΩ |
| Net weight | 0.17 Lb(US) (0.075 kg) |

Environment

| | |
|---------------------------------------|-----------------------------------|
| IP degree of protection | IP65 IP67 |
| Product certifications | CULus |
| Ambient air temperature for operation | -13...176 °F (-25...80 °C) static |
| Ambient air temperature for storage | -13...176 °F (-25...80 °C) |




Ordering and shipping details

| | |
|-----------------------|-----------------------------|
| Category | 22499 - SENSORS ACCESSORIES |
| Discount Schedule | DS2 |
| GTIN | 03389119073271 |
| Nbr. of units in pkg. | 1 |
| Package weight(Lbs) | 2.12 Oz (60 g) |
| Returnability | No |
| Country of origin | PL |

Packing Units

| | |
|------------------------|------------------|
| Unit Type of Package 1 | PCE |
| Package 1 Height | 1.57 In (4 cm) |
| Package 1 width | 9.45 In (24 cm) |
| Package 1 Length | 11.81 In (30 cm) |


Offer Sustainability

| | |
|----------------------------|--|
| California proposition 65 | WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Diisodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |
| REACH Regulation |  REACH Declaration |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration |
| Mercury free | Yes |
| RoHS exemption information |  Yes |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|


Dimensions

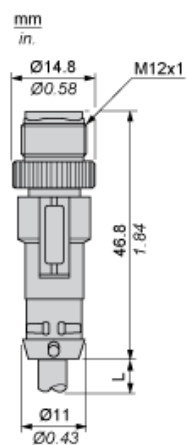

L : Length of cable

Connections and Schemes

Connectors



BU : Blue
BN : Brown
BK : Black
Y/G : Yellow / Green
BK/WH : Black / White

| |
|---|
| Product Life Status : Commercialised |
|---|