
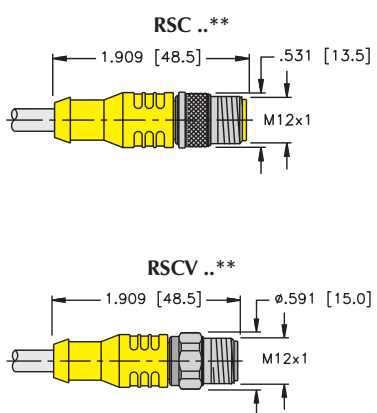


10-Wire M12 eurofast® Cordsets, "C" Style Medium Plug Body

- Straight Male Connector
- NEMA 1, 3, 4, 6P
- IEC IP 68 Protection
- 60 VAC/75 VDC, 2 A



Housing Style	Part Number	Cable	Features	Pinout
 <p><b>RSC ..**</b> 1.909 [48.5] .531 [13.5] M12x1</p> <p><b>RSCV ..**</b> 1.909 [48.5] Ø.591 [15.0] M12x1</p>	RSC 10T-*	AWM PVC Grey 10x24 AWG 105°C 6.2 mm OD Cable #RF51004-*M†	<i>flexlife®</i>	
	RSC 10T-*/S90	AWM PUR Grey 10x24 AWG 105°C 6.2 mm OD Cable #RF51005-*M†	<i>Cut/Abrasion Immune</i>	
	RSC 10T-*/S101	AWM TPE Black 10x24 AWG 105°C 7.0 mm OD Cable #RF51077-*M†	<i>flexLife-10, High Flex Over 10 Million Cycles</i>	
	RSC 10T-*/S618	AWM PVC Black 10x24 AWG Foil/Drain 105°C 7.0 mm OD Cable #RF51076-*M†	<i>RFI/EMI Shielding</i>	

Cordsets

\* Length in meters. Standard cable lengths are 2, 4, 6, 8 and 10 meters. Consult factory for other lengths.  
 \*\* Standard coupling nut material is nickel plated brass "RSC .."; "RSCV .." indicates 316 stainless steel.  
 † See Section N for **reelfast**® cable information.