

4-Wire M12 *eurofast*® Cordsets, Standard Plug Body

- Right Angle Male Connector
- NEMA 1, 3, 4, 6P
- IEC IP 68 Protection
- 250 VAC/300 VDC, 4 A





Housing Style	Part Number	Cable	Features	Pinout
<p>WS ..**</p> <p>WSK ..**</p> <p>WSV ..**</p>	WS 4.41T-*	AWM PVC NAMUR Blue 4x22 AWG 105°C 5.2 mm OD Cable #RF50598- [†] M [†]	<i>flexlife</i> ®	<p>1. BN 2. WH 3. BU 4. BK</p>
	WS 4.41T-*/S529	AWM PUR/Heavy Braid Double Jacket Yellow 4x20 AWG 105°C 5.8 mm OD Cable #RF50526- [†] M [†]	<i>Cut/Abrasion Immune</i> <i>Braided Mechanical Shield</i>	
	WS 4.43T-*	AWM PVC Yellow 4x22 AWG 105°C 5.2 mm OD Cable #RF50530- [†] M [†]	<i>flexlife</i>	
	WS 4.43T-*/S90	AWM PUR Yellow 4x22 AWG 105°C 5.2 mm OD Cable #RF50613- [†] M [†]	<i>Cut/Abrasion Immune</i>	
	WS 4.4T-*	AWM PVC Grey 4x22 AWG 105°C, 5.2 mm OD Cable #RF50516- [†] M [†]	<i>flexlife</i>	
	WS 4.4T-*/S90	AWM PUR Grey 4x22 AWG 105°C, 5.7 mm OD Cable #RF50532- [†] M [†]	<i>Cut/Abrasion Immune</i>	
	WS 4.4T-*/S101	AWM TPE Grey 4x22 AWG 105°C, 5.2 mm OD Cable #RF50941- [†] M [†]	<i>flexLife-10, High Flex</i> <i>Over 10 Million Cycles</i>	
	WS 4.4T-*/S824	PLTC PVC Grey 4x22 AWG 105°C, 5.2 mm OD Cable #RF50698- [†] M [†]	<i>Tray Rated</i>	
	WS 4.4T-*/S618	AWM PVC Grey 4x22 AWG Foil/Drain 105°C, 5.2 mm OD Cable #RF50577- [†] M [†]	<i>RFI/EMI Shielding</i>	
	WS 4.4T-*/S618/S824	PLTC PVC Grey 4x22 AWG Foil/Drain 105°C, 5.2 mm OD Cable #RF50773- [†] M [†]	<i>RFI/EMI Shielding Tray Rated</i>	

* Length in meters. Standard cable lengths are 2, 4, 6, 8 and 10 meters. Consult factory for other lengths.
 ** Standard coupling nut material is nickel plated brass "WS .."; "WSK .." indicates nylon and "WSV .." indicates 316 stainless steel.
[†] See Section N for *reelfast*® cable information.

4-Wire M12 eurofast® Cordsets, Standard Plug Body

- Right Angle Male Connector
- NEMA 1, 3, 4, 6P
- IEC IP 68 Protection
- 250 VAC/300 VDC, 4 A

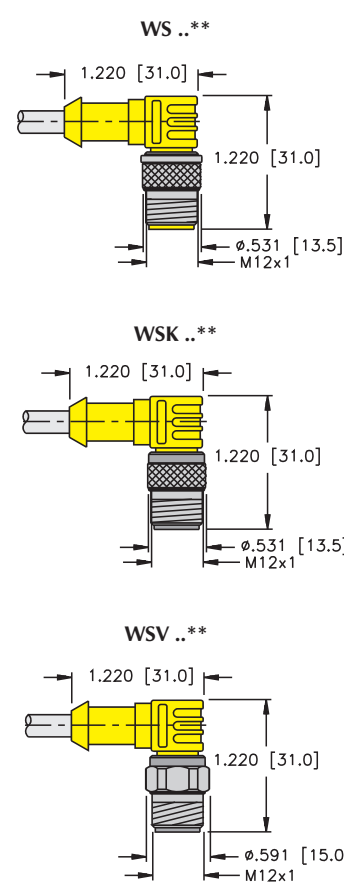

Housing Style	Part Number	Cable	Features	Pinout
 <p>WS ..**</p> <p>WSK ..**</p> <p>WSV ..**</p>	WS 4.4T-*/S653	AWM PVC Grey 3x20 AWG Foil/Drain 105°C 5.7 mm OD Cable #RF50611- [†] M [†]	RFI/EMI Shielding	1. BN 2. Drain 3. BU 4. BK
	WS 4.4T-*/S760	AWM PVC Black 4x22 AWG 105°C 5.2 mm OD Cable #RF50983- [†] M [†]	flexlife®	
	WS 4.4T-*/S90/S670	AWM PUR Black 4x26 AWG 105°C 4.4 mm OD Cable #RF50586- [†] M [†]	Cut/Abrasion Immune	
	WS 4.4T-*/S1587	AWM TPE Yellow 4x22 AWG 80°C 5.2 mm OD Cable #RF51132- [†] M [†]	weldlife, Weld Flash Immune	1. BN 2. WH 3. BU 4. BK
	WS 4.4T-*/X0R	AWM PVC Yellow 4x20 AWG 80°C 250°C short term 5.2 mm OD Cable #RF04304- [†] M [†]	Weld Flash Immune, High Temperature Resistance	
	WS 4.4T-*/S1666	AWM PUR Grey 2: 2x22 AWG STP Foil/Drain 105°C 6.2 mm OD Cable #RF51069- [†] M [†]	Cut/Abrasion Immune, Shielded Twisted Pair for Communication	
				

Cordsets

* Length in meters. Standard cable lengths are 2, 4, 6, 8 and 10 meters. Consult factory for other lengths.
 ** Standard coupling nut material is nickel plated brass "WS .."; "WSK .." indicates nylon and "WSV .." indicates 316 stainless steel.
 † See Section N for reelfast® cable information.