



12-Pin M23 *multifast*® Cordsets, AC & DC Color Code

- Straight Female Connector
- For *euromast*®, *minifast*®, and *microfast*® Junction Boxes and multi-conductor Applications
- IEC IP 67 Protection
- 300 V, 6 A

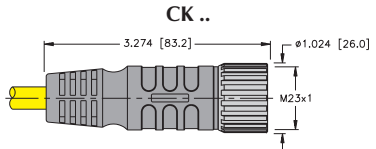

Housing Style	Part Number	Cable	Ports, App.	Features	Pinout
	CKBM 12-7-*	AWM PVC Black 7x18 AWG 105°C 7.2 mm OD Cable #RF50715-*M†	4-port, AC Color Code, Standard Wiring with LEDs	<i>flexlife</i> ®	1. WH/BK 2. BK 3. WH 4. RD 5. OG 6. BU 7. GN
	CKBM 12-11-*	AWM PVC Black 11x18 AWG 105°C 10 mm OD Cable #RF50716-*M†	8-port, AC Color Code, Standard Wiring with LEDs		1. OG 2. BU 3. WH/BK 4. RD/BK 5. GN/BK 6. OG/BK 7. BU/BK 9. GN 10. RD 11. WH 12. BK
	CKCM 12-7-*	ITC/PLTC PVC Yellow 7x18 AWG 105°C 7.9 mm OD Cable #RF50637-*M†	4-port 1 Signal per port, DC Color Code	<i>flexlife</i>	1. WH 2. GN 3. YE 4. GY 10. BU 11. BN 12. GN/YE
	CKCM 12-7-*/S90	AWM PUR Yellow 7x18 AWG 105°C 7.2 mm OD Cable #RF50676-*M†		Cut/Abrasion Immune	
	CKCM 12-11-*	ITC/PLTC PVC Yellow 11x18 AWG 105°C 10 mm OD Cable #RF51088-*M†	8-port 1 Signal per port, DC Color Code	<i>flexlife</i>	1. WH 2. GN 3. YE 4. GY 5. PK 6. RD 7. BK 8. VT 10. BU 11. BN 12. GN/YE
	CKCM 12-11-*/S90	AWM PUR Yellow 11x18 AWG 105°C 10 mm OD Cable #RF50678-*M†		Cut/Abrasion Immune	



Cordsets

* Length in meters.
Standard cable lengths are 5 and 10 meters. Consult factory for other lengths.
Standard coupling nut material is nickel plated brass.. "CKB(C)M.."; "CKB(C)MV.." indicates stainless steel coupling nut.
† See Section N for *reelfast*® cable information.