
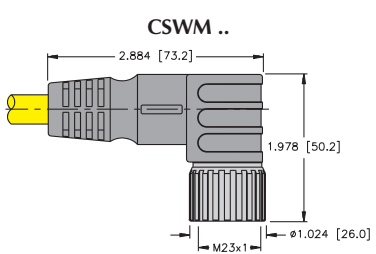


12-Pin M23 multifast® Cordsets, DC Color Code, Standard Wiring

- Right Angle Male Connector
- For *euromast*® Junction Boxes and multi-conductor Applications
- IEC IP 67 Protection
- 300 V, 6 A



Housing Style	Part Number	Cable	Ports, App.	Features	Pinout
	CSWM 12-11-*	ITC/PLTC PVC Yellow 11x18 AWG 105°C 10 mm OD Cable #RF51088- [†] M [†]	8 port, 1 Signal per port	<i>flexlife</i> ®	
	CSWM 12-11-*/S90	AWM PUR Yellow 11x18 AWG 105°C 10 mm OD Cable #RF50678- [†] M [†]		Cut/Abrasion Immune	
	CSWM 12-7-*	ITC/PLTC PVC Yellow 7x18 AWG 105°C 7.9 mm OD Cable #RF50637- [†] M [†]	4 port, 1 Signal per port	<i>flexlife</i>	
	CSWM 12-7-*/S90	AWM PUR Yellow 7x18 AWG 105°C 7.2 mm OD Cable #RF50676- [†] M [†]		Cut/Abrasion Immune	
	CSWM 12-9-*	ITC/PLTC PVC Yellow 9x18 AWG 105°C 10 mm OD Cable #RF50636- [†] M [†]	6 port, 1 Signal per port	<i>flexlife</i>	
	CSWM 12-9-*/S90	AWM PUR Yellow 9x18 AWG 105°C 10.0 mm OD Cable #RF50677- [†] M [†]		Cut/Abrasion Immune	
	CSWM 12-12-*/S101	AWM TPE Yellow 12x18 AWG 105°C 9.3 mm OD Cable #RF50915- [†] M [†]	8 port, 1 Signal per port	<i>flexlife-10, High Flex - Over 10 million cycles</i>	
	CSWM 12-12-*/S817	AWM PVC Yellow 12x18 AWG 105°C 10.0 mm OD Cable #RF50606- [†] M [†]		<i>flexlife</i>	

Cordsets

* Length in meters.
Standard cable lengths are 5 and 10 meters. Consult factory for other lengths.
Standard coupling nut material is nickel plated brass.. "CSWM.."; "CSWMV.." indicates stainless steel coupling nut.
[†] See Section N for *reelfast*® cable information.