
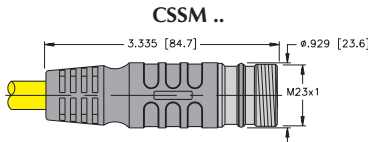


**19-Pin M23 multifast® Cordsets, DC Color Code, Standard Wiring**

- Straight Male Connector
- For eurofast® Junction Boxes and multi-conductor Applications
- IEC IP 67 Protection
- 150 V, 9 A (18 AWG) & 2 A (22 AWG)



Housing Style	Part Number	Cable	Ports, App.	Features	Pinout
 <p>CSSM ..</p>	CSSM 19-11-*	PLTC PVC Yellow 3x18, 8x22 AWG 105°C 8.5 mm OD Cable #RF50624- <sup>†</sup> M <sup>†</sup>	4-port, 2 Signals per port	flexlife®	
	CSSM 19-11-*/S90	AWM PUR Yellow 3x18, 8x22 AWG 105°C 8.4 mm OD Cable #RF50718- <sup>†</sup> M <sup>†</sup>		Cut/Abrasion Immune	
	CSSM 19-15-*	AWM PVC Yellow 3x18, 12x22 AWG 105°C 8.4 mm OD Cable #RF50625- <sup>†</sup> M <sup>†</sup>	6-port, 2 Signals per port	flexlife	
	CSSM 19-15-*/S90	AWM PUR Yellow 3x18, 12x22 AWG 105°C 8.4 mm OD Cable #RF50818- <sup>†</sup> M <sup>†</sup>		Cut/Abrasion Immune	
	CSSM 19-19-*	PLTC PVC Yellow 3x18, 16x22 AWG 105°C 10.4 mm OD Cable #RF50620- <sup>†</sup> M <sup>†</sup>	8-port, 2 Signals per port	flexlife	
	CSSM 19-19-*/S90	AWM PUR Yellow 3x18, 16x22 AWG 105°C 10.4 mm OD Cable #RF50682- <sup>†</sup> M <sup>†</sup>		Cut/Abrasion Immune	
CSSM 19-19-*/S101	AWM TPE Yellow 3x18, 16x22 AWG 105°C 9.3 mm OD Cable #RF50916- <sup>†</sup> M <sup>†</sup>	flexlife-10, High Flex - Over 10 million cycles			

Cordsets

\* Length in meters.  
Standard cable lengths are 5 and 10 meters. Consult factory for other lengths.  
Standard coupling nut material is nickel plated brass.. "CSSM..".  
<sup>†</sup> See Section N for reelfast® cable information.