
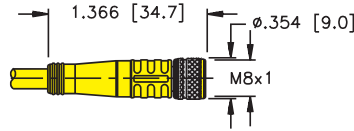


Sensors

Mating Cordsets



**4-Pin *picofast*®
Cordset
Standard Plug Body
125 VAC/VDC, 4 A**

4-Pin

| Application | Part Number | Cable Specifications | Pinout |
|---|--------------|--|----------------------------------|
| 4-Wire Picofast Snap Lock Connection, CSA Certified | PKG 4Z-* | 4/26 AWG Yellow PVC 105°C 4.4 mm OD | 1. BN 2. WH 3. BU 4. BK |
| | PKG 4Z-*/S90 | 4/26 AWG Black PUR 80°C 4.4 mm OD | 1. BN 2. WH 3. BU 4. BK |
| 4-Wire <i>picofast</i> Threaded Connection, CSA Certified | PKG 4M-* | 4/26 AWG Yellow PVC 105°C 4.4 mm OD | 1. Bn 2. Wh 3. Bu 4. Bk |
| | PKG 4M-*/S90 | 4/26 AWG Black PUR 80°C 4.4 mm OD | 1. Bn 2. Wh 3. Bu 4. Bk |

Pinouts

