

12 and 16-Pin M23 *multifast*® Receptacles, Front Mount

- Female Receptacles
- For use with Junction Box Home Run Cables
- IEC IP 67 Protection



Housing Style	Part Number	Lead Specs.	Application	Pinout	
<p>1</p> <p>CK(A)(B)F</p> <p>2</p> <p>CK(A)(B)FL</p>	CKAF 16-10-*	UL Nickel Plated Brass 10x18 AWG 105°C 150 V 6 A	4-port, Isolated Power Supply	1. BN 3. BU 4. WH 5. GN/YE 6. OG 7. YE 8. GY 11. BN/WH 13. BU/WH 15. GN/WH	
	CKAF 16-12-*	UL Nickel Plated Brass 12x18 AWG 105°C 150 V 6 A	6-port, Isolated Power Supply	1. BN    8. GY 3. BU    9. PK 4. WH    10. RD 5. GN/YE 11. BN/WH 6. OG    13. BU/WH 7. YE    15. GN/WH	
	CKAF 16-14-*	UL Nickel Plated Brass 14x18 AWG 105°C 150 V 6 A	8-port, Isolated Power Supply	1. BN    9. PK 3. BU    10. RD 4. WH    11. BN/WH 5. GN/YE 12. BK 6. OG    13. BU/WH 7. YE    14. VT 8. GY    15. GN/WH	
	CKBF 12-7-*	UL Nickel Plated Brass 7x18 AWG 105°C 300 V 6 A	4-port, with LED's	1. WH/BK 2. BK 3. WH 4. RD 5. OG 6. BU 7. GN	
	CKBF 12-11-*	UL Nickel Plated Brass 11x18 AWG 105°C 300 V 6 A	8-port, with LED's	1. OG 2. BU 3. WH/BK 4. RD/BK 5. GN/BK 6. OG/BK 7. BU/BK 9. GN 10. RD 11. WH 12. BK	

Receptacles

See page H49 for dimensional drawings.


\* Length in meters. Standard lead length is 1 meter. Consult factory for other lengths.

"CKA(B)FL .." indicates long mounting threads; "CKA(B)FLV .." indicates 316 stainless steel housing with long threads.

To specify PVC jacketed cable, add "/S717" to the end of the part number.

**multifast® Receptacles**

1

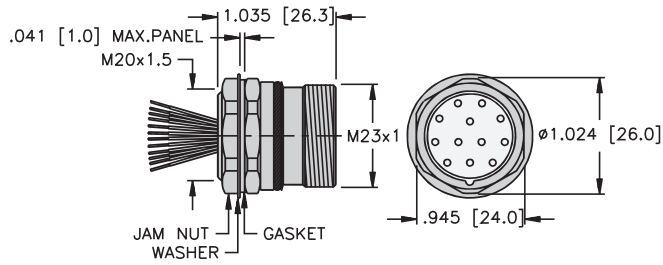


Typical panel cutout is 20.4 x 19 x 20.4 mm.

CS(K)F

Page H51 - H58

2

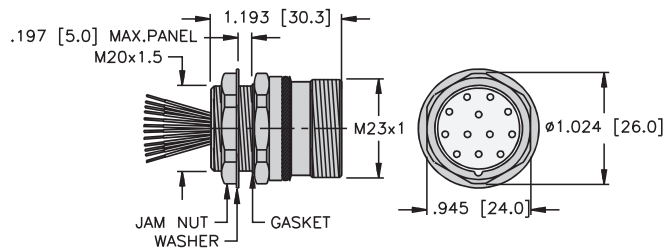

Typical panel cutout is 20.4 x 19 x 20.4 mm.

CS(K)FL

Page H51 - H58