


12-Pin M23 *multifast*® Receptacles, Rear Mount

- Female Receptacles
- For use with Junction Box Home Run Cables
- IEC IP 67 Protection



Housing Style	Part Number	Lead Specs.	Application	Pinout
	CKBFD 12-7-*	UL Nickel Plated Brass 7x18 AWG 105°C 300 V 6 A	4-port, with LEDs	1. WH/BK 2. BK 3. WH 4. RD 5. OG 6. BU 7. GN
	CKBFD 12-11-*	UL Nickel Plated Brass 11x18 AWG 105°C 300 V 6 A	8-port, with LEDs	1. OG 2. BU 3. WH/BK 4. RD/BK 5. GN/BK 6. OG/BK 7. BU/BK 9. GN 10. RD 11. WH 12. BK
	CKCFD 12-7-*	UL Nickel Plated Brass 7x18 AWG 105°C 300 V 6 A	4-port, 1 Signal per port	1. WH 2. GN 3. YE 4. GY 10. BU 11. BN 12. GN/YE
	CKCFD 12-11-*	UL Nickel Plated Brass 11x18 AWG 105°C 300 V 6 A	8-port, 1 Signal per port	1. WH 2. GN 3. YE 4. GY 5. PK 6. RD 7. BK 8. VT 10. BU 11. BN 12. GN/YE




Receptacles

See page H50 for dimensional drawings.

* Length in meters. Standard lead length is 1 meter. Consult factory for other lengths.
To specify PVC jacketed cable, add "/S717" to the end of the part number.


multifast® Receptacles

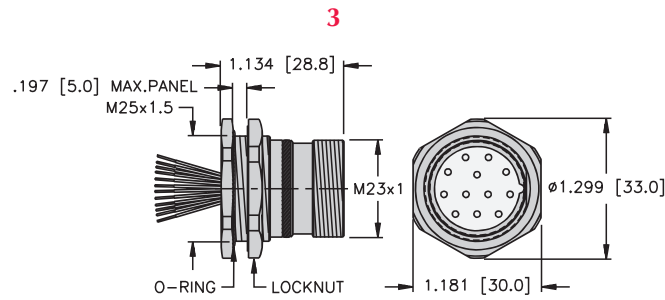

Typical panel cutout is 25.4 x 24.3x25.4 mm.

CS(K)FD

Page H59 - H66

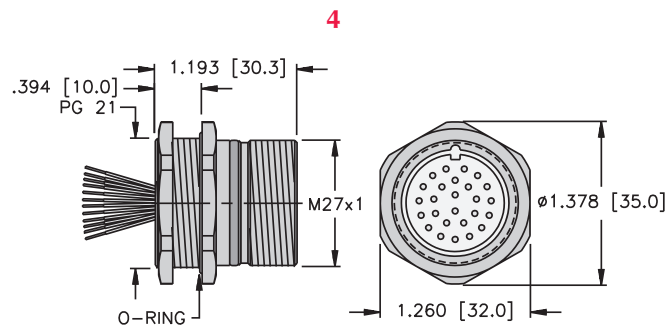

Typical panel cutout is 28.3 mm.

DS(K)F

Page H67 - H68