


**16-Pin M23 *multifast*® Receptacles, Rear Mount**

- Female Receptacles
- For use with Junction Box Home Run Cables
- IEC IP 67 Protection



Housing Style	Part Number	Lead Specs.	Application	Pinout
	CKAFD 16-10-*	UL Nickel Plated Brass 10x18 AWG 105°C 150 V 6 A	<i>4-port, Isolated Power Supply</i>	1. BN 3. BU 4. WH 5. GN/YE 6. OG 7. YE 8. GY 11. BN/WH 13. BU/WH 15. GN/WH
	CKAFD 16-12-*	UL Nickel Plated Brass 12x18 AWG 105°C 150 V 6 A	<i>6-port, Isolated Power Supply</i>	1. BN    8. GY 3. BU    9. PK 4. WH    10. RD 5. GN/YE    11. BN/WH 6. OG    13. BU/WH 7. YE    15. GN/WH
	CKAFD 16-14-*	UL Nickel Plated Brass 14x18 AWG 105°C 150 V 6 A	<i>8-port, Isolated Power Supply</i>	1. BN    9. PK 3. BU    10. RD 4. WH    11. BN/WH 5. GN/YE    12. BK 6. OG    13. BU/WH 7. YE    14. VT 8. GY    15. GN/WH




Receptacles

See page H50 for dimensional drawings.

\* Length in meters. Standard lead length is 1 meter. Consult factory for other lengths.  
To specify PVC jacketed cable, add "/S717" to the end of the part number.


**multifast® Receptacles**

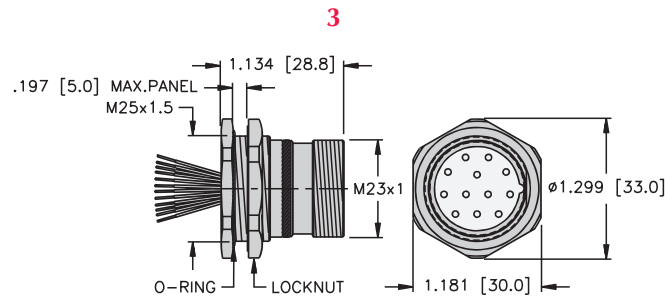

Typical panel cutout is 25.4 x 24.3x25.4 mm.

**CS(K)FD**

**Page H59 - H66**

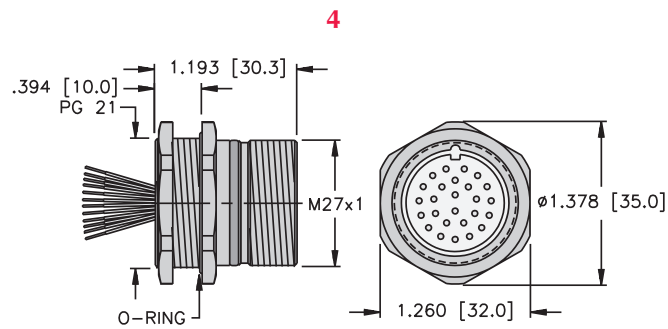

Typical panel cutout is 28.3 mm.

**DS(K)F**

**Page H67 - H68**