


12, 14 and 19-Pin M16 versafast® Receptacles, Rear Mount, M18 Threads

- Male Receptacles
- IEC IP 67 Protection



Housing Style	Part Number	Lead Specs.	Application	Pinout																			
	BSFD 12-12-*/M18	12x22 AWG 105°C 125 VAC/VDC, 4 A	Mates with 12-pin connectors, 12 conductors	<table border="0"> <tr><td>A. BN</td><td>G. PK</td></tr> <tr><td>B. BU</td><td>H. RD</td></tr> <tr><td>C. WH</td><td>J. BK</td></tr> <tr><td>D. GN</td><td>K. OG</td></tr> <tr><td>E. YE</td><td>L. TN</td></tr> <tr><td>F. GY</td><td>M. VT</td></tr> </table>	A. BN	G. PK	B. BU	H. RD	C. WH	J. BK	D. GN	K. OG	E. YE	L. TN	F. GY	M. VT							
	A. BN	G. PK																					
	B. BU	H. RD																					
	C. WH	J. BK																					
	D. GN	K. OG																					
E. YE	L. TN																						
F. GY	M. VT																						
BSFD 14-10-*/M18	10x22 AWG 105°C 30 VAC/VDC, 3 A	Mates with 14-pin connectors,10 conductors	<table border="0"> <tr><td>C. GY</td><td>O. YE</td></tr> <tr><td>E. GN</td><td>P. WH</td></tr> <tr><td>G. BK</td><td>R. RD</td></tr> <tr><td>M. BN</td><td>S. VT</td></tr> <tr><td>N. PK</td><td>U. BU</td></tr> </table>	C. GY	O. YE	E. GN	P. WH	G. BK	R. RD	M. BN	S. VT	N. PK	U. BU										
C. GY	O. YE																						
E. GN	P. WH																						
G. BK	R. RD																						
M. BN	S. VT																						
N. PK	U. BU																						
BSFD 14-12-*/M18	12x22 AWG 105°C 30 VAC/VDC, 3 A	Mates with 14-pin connectors,12 conductors	<table border="0"> <tr><td>C. OG</td><td>O. VT</td></tr> <tr><td>E. BK</td><td>P. RD</td></tr> <tr><td>G. GN</td><td>R. WH</td></tr> <tr><td>J. GY</td><td>S. YE</td></tr> <tr><td>M. BN</td><td>T. PK</td></tr> <tr><td>N. TN</td><td>U. BU</td></tr> </table>	C. OG	O. VT	E. BK	P. RD	G. GN	R. WH	J. GY	S. YE	M. BN	T. PK	N. TN	U. BU								
C. OG	O. VT																						
E. BK	P. RD																						
G. GN	R. WH																						
J. GY	S. YE																						
M. BN	T. PK																						
N. TN	U. BU																						
BSFD 14-14-*/M18	14x22 AWG 105°C 30 VAC/VDC, 3 A	Mates with 14-pin connectors,14 conductors	<table border="0"> <tr><td>A. BN</td><td>N. GY/BN</td></tr> <tr><td>C. RD/BU</td><td>O. VT</td></tr> <tr><td>E. BK</td><td>P. WH</td></tr> <tr><td>G. PK</td><td>R. RD</td></tr> <tr><td>J. GN</td><td>S. GY</td></tr> <tr><td>L. BU</td><td>T. YE</td></tr> <tr><td>M. OG</td><td>U. TN</td></tr> </table>	A. BN	N. GY/BN	C. RD/BU	O. VT	E. BK	P. WH	G. PK	R. RD	J. GN	S. GY	L. BU	T. YE	M. OG	U. TN						
A. BN	N. GY/BN																						
C. RD/BU	O. VT																						
E. BK	P. WH																						
G. PK	R. RD																						
J. GN	S. GY																						
L. BU	T. YE																						
M. OG	U. TN																						
BSFD 19-19-*/M18	19x22 AWG 105°C 30 VAC/VDC, 3 A	Mates with 19-pin connectors, 19 conductors	<table border="0"> <tr><td>A. BU</td><td>L. BN</td></tr> <tr><td>B. GY/PK</td><td>M. OG</td></tr> <tr><td>C. RD/BU</td><td>N. GY/BN</td></tr> <tr><td>D. WH/GN</td><td>O. VT</td></tr> <tr><td>E. BK</td><td>P. WH</td></tr> <tr><td>F. BN/GN</td><td>R. RD</td></tr> <tr><td>G. PK</td><td>S. GY</td></tr> <tr><td>H. WH/YE</td><td>T. YE</td></tr> <tr><td>I. GN</td><td>U. TN</td></tr> <tr><td>K. YE/BN</td><td></td></tr> </table>	A. BU	L. BN	B. GY/PK	M. OG	C. RD/BU	N. GY/BN	D. WH/GN	O. VT	E. BK	P. WH	F. BN/GN	R. RD	G. PK	S. GY	H. WH/YE	T. YE	I. GN	U. TN	K. YE/BN	
A. BU	L. BN																						
B. GY/PK	M. OG																						
C. RD/BU	N. GY/BN																						
D. WH/GN	O. VT																						
E. BK	P. WH																						
F. BN/GN	R. RD																						
G. PK	S. GY																						
H. WH/YE	T. YE																						
I. GN	U. TN																						
K. YE/BN																							

Receptacles

See page G36 for dimensional drawings.

\*Length in meters. Standard lead length is 0.5 meter. Consult factory for other lengths.


Standard housing material is nickel plated brass. "BSFDV.." indicates 316 stainless steel.

Available with spanner nut as an option (vs. Hex locknut). Add "/S1046" to end of description.

To specify PVC jacketed cable, add "/S717" to the end of the part number.

M16 versafast® Receptacles

25

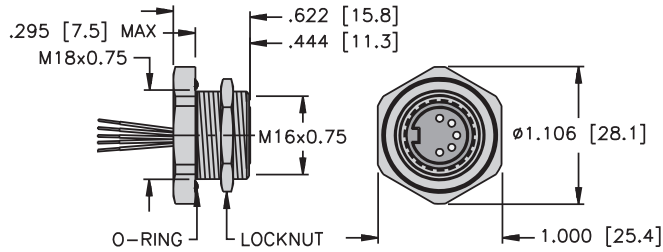


Typical panel cutout is 18.6 mm.

**BKFD .. M18 (5-8 pin), Rear Mount**

**Page G63**

26

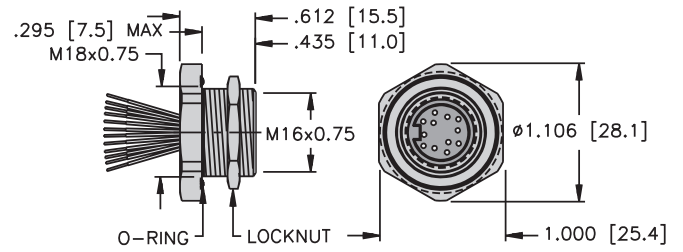


Typical panel cutout is 18.6 mm.

**BKFD .. M18 (12-19 pin), Rear Mount**

**Page G64**

27

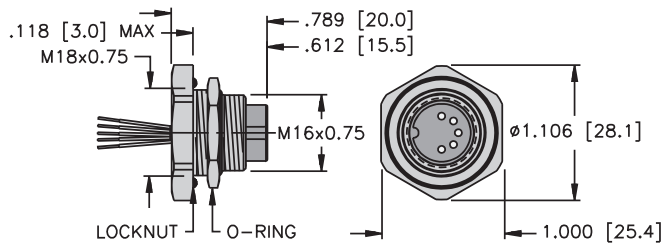


Typical panel cutout is 18.6 mm.

**BSFD.. M18 (5-8 pin), Rear Mount**

**Page G61**

28

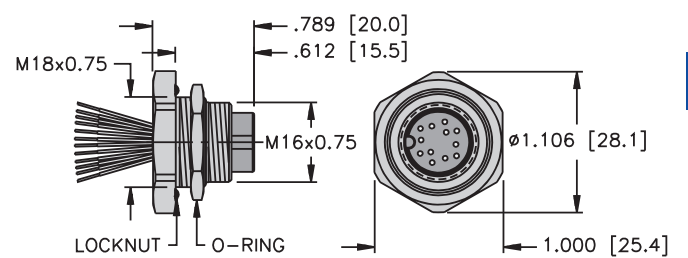

**BSFD.. M18 (12-19 pin), Rear Mount**

**Page G62**

Receptacles