

12, 14 and 19-Pin M16 versafast® Receptacles, Rear Mount, PCB Pins

- Male Receptacles
- Locknuts and O-rings Included
- Easy Keyway Orientation
- IEC IP 67 Protection






Housing Style	Part Number	Lead Specs.	Application	Pinout
	BSFD 12-PCB	Nickel Plated Brass 12-pin PCB Pins 105°C 60 V, 3 A	M18x.75 Threads, Mates with 12-pin cordsets	
	BSFD 14-PCB	Nickel Plated Brass 14-pin PCB Pins 105°C 60 V, 3 A	M18x.75 Threads, Mates with 14-pin cordsets	
	BSFD 19-PCB	Nickel Plated Brass 19-pin PCB Pins 105°C 60 V, 3 A	M18x.75 Threads, Mates with 19-pin cordsets	

Receptacles


See page G33 for dimensional drawings.

Available with spanner nut as an option (vs. Hex locknut). Add "/S1046" to end of description.

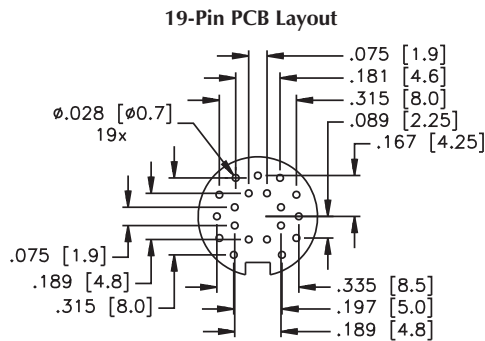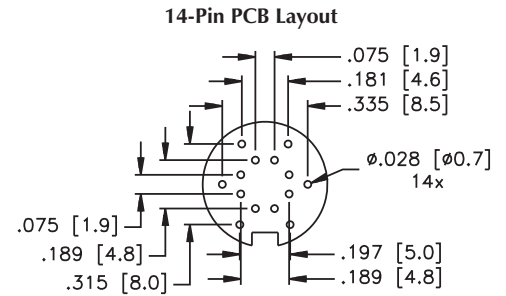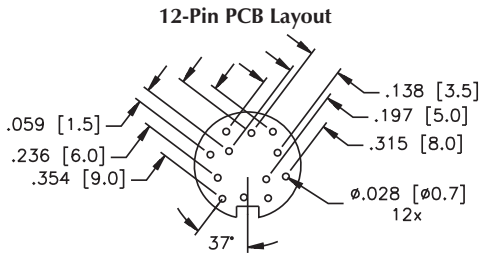

**M16 versafast® Receptacles**

**1**

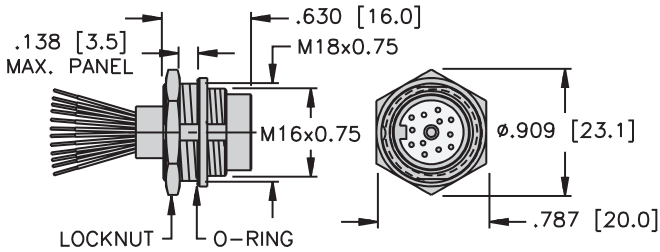


Typical panel cutout is 18 x 17 mm.

**BSF .. (5-8, 12-19 pin)**

Page G37 - G38

**2**

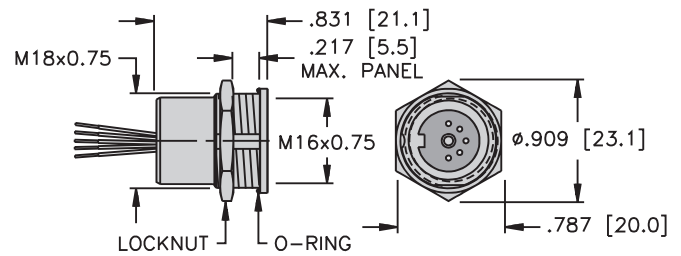


Typical panel cutout is 18 x 17 mm.

**BKF .. (5-8 pin)**

Page G39

**3**

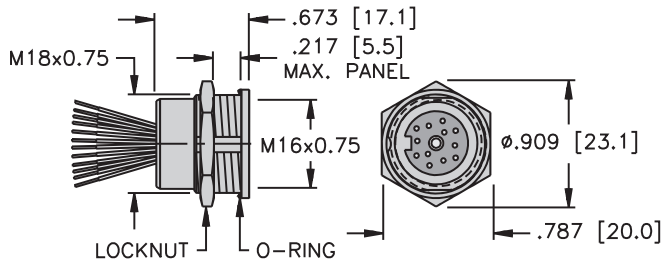


Typical panel cutout is 18 x 17 mm.

**BKF .. (12-19 pin)**

Page G40

**4**

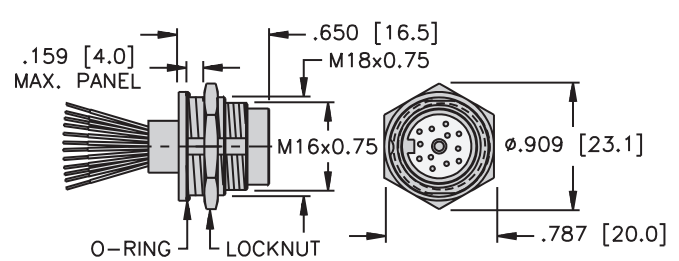


Typical panel cutout is 18 x 17 mm.

**BSFD .. (5-8, 12-19 pin)**

Page G57 - G58


**5**

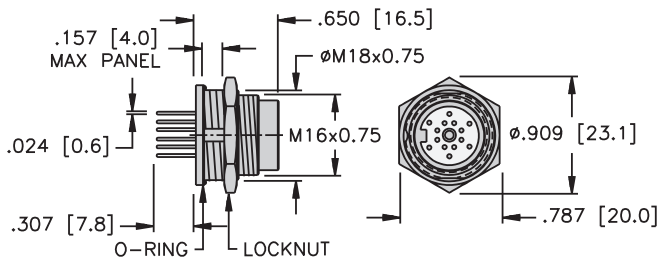

**BSFD ..PCB (5-8, 12-19 pin)**

Page G65 - G66


**6**

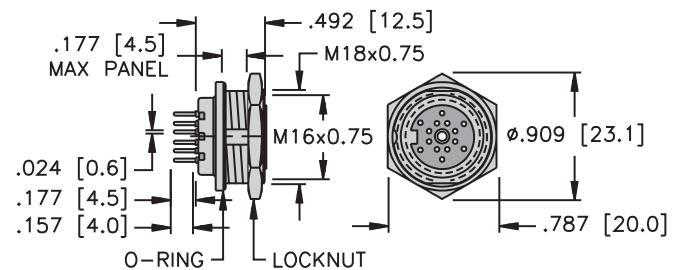

**BKFD ..PCB (5-8, 12-19 pin)**

Page G67 - G68

**7**

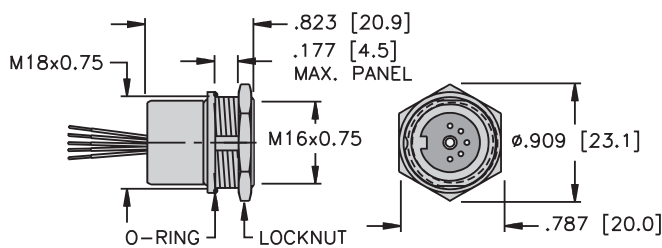


Typical panel cutout is 18 x 17 mm.

**BKFD .. (5-8 pin)**

Page G59

**8**

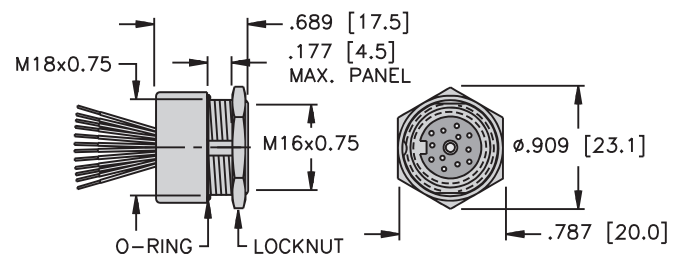

Typical panel cutout is 18 x 17 mm.

**BKFD .. (12-19 pin)**

Page G60