

Junction Box Connectivity Products

Multibox® Eurofast®, Junction Boxes, 4-Port Stainless Steel Connector Options

- 1 or 2 Signals per Port
- Rugged Plastic Housing with Flush Connectors
- Available with LEDs
- M23 Quick Disconnect or Integral Home Run Cable
- Available with Stainless Steel Threaded Connections



4-Port, 1 Signal per Port, 10-48 VDC

Application	Specifications	Pinout	Part Number																				
4-port J-box 1 signal per port Integral cable	4 A/port, 9 A total Yellow PVC cable** 7x18 AWG foil shield and 20 AWG drain **with PUR cable, add /S90	<table> <tr> <th>Function</th><th>Color</th><th>Function</th><th>Color</th></tr> <tr> <td>+V</td><td>BN</td><td>Port 1</td><td>WH</td></tr> <tr> <td>-V</td><td>BU</td><td>Port 2</td><td>GN</td></tr> <tr> <td>Ground</td><td>GN / YE</td><td>Port 3</td><td>YE</td></tr> <tr> <td></td><td></td><td>Port 4</td><td>GY</td></tr> </table>	Function	Color	Function	Color	+V	BN	Port 1	WH	-V	BU	Port 2	GN	Ground	GN / YE	Port 3	YE			Port 4	GY	4MBV12-4P2-*
Function	Color	Function	Color																				
+V	BN	Port 1	WH																				
-V	BU	Port 2	GN																				
Ground	GN / YE	Port 3	YE																				
		Port 4	GY																				
4-port J-box 1 signal per port Multifast® connector	4 A/port, 8 A total 12-pin Multifast connector 7 conductors. Mates with CKCMV12-7-*	<table> <tr> <th>Function</th><th>Pin / Color</th><th>Function</th><th>Pin / Color</th></tr> <tr> <td>+V</td><td>11 / BN</td><td>Port 1</td><td>1 / WH</td></tr> <tr> <td>-V</td><td>10 / BU</td><td>Port 2</td><td>2 / GN</td></tr> <tr> <td>Ground</td><td>12 / GN / YE</td><td>Port 3</td><td>3 / YE</td></tr> <tr> <td></td><td></td><td>Port 4</td><td>4 / GY</td></tr> </table>	Function	Pin / Color	Function	Pin / Color	+V	11 / BN	Port 1	1 / WH	-V	10 / BU	Port 2	2 / GN	Ground	12 / GN / YE	Port 3	3 / YE			Port 4	4 / GY	4MBV12-4P2-CSV12
Function	Pin / Color	Function	Pin / Color																				
+V	11 / BN	Port 1	1 / WH																				
-V	10 / BU	Port 2	2 / GN																				
Ground	12 / GN / YE	Port 3	3 / YE																				
		Port 4	4 / GY																				

4-Port, 2 Signal per Port, 10-48 VDC


Application	Specifications	Pinout	Part Number																												
4-port J-box 2 signals per port Integral cable	4 A/port, 9 A total Yellow PVC cable** 3x18 AWG, 8x22 AWG foil shield and 20 AWG drain **with PUR cable, add /S90	<table> <tr> <th>Function</th><th>Color</th><th>Function</th><th>Color</th></tr> <tr> <td>+V</td><td>BN</td><td>port 2, Sig 1</td><td>GN</td></tr> <tr> <td>-V</td><td>BU</td><td>port 2, Sig 2</td><td>RD / BU</td></tr> <tr> <td>Ground</td><td>GN/YE</td><td>port 3, Sig 1</td><td>YE</td></tr> <tr> <td>port 1, Sig 1</td><td>WH</td><td>port 3, Sig 2</td><td>WH / GN</td></tr> <tr> <td>port 1, Sig 2</td><td>GY / PK</td><td>port 4, Sig 1</td><td>GY</td></tr> <tr> <td></td><td></td><td>port 4, Sig 2</td><td>BN / GN</td></tr> </table>	Function	Color	Function	Color	+V	BN	port 2, Sig 1	GN	-V	BU	port 2, Sig 2	RD / BU	Ground	GN/YE	port 3, Sig 1	YE	port 1, Sig 1	WH	port 3, Sig 2	WH / GN	port 1, Sig 2	GY / PK	port 4, Sig 1	GY			port 4, Sig 2	BN / GN	4MBV12-5P3-*
Function	Color	Function	Color																												
+V	BN	port 2, Sig 1	GN																												
-V	BU	port 2, Sig 2	RD / BU																												
Ground	GN/YE	port 3, Sig 1	YE																												
port 1, Sig 1	WH	port 3, Sig 2	WH / GN																												
port 1, Sig 2	GY / PK	port 4, Sig 1	GY																												
		port 4, Sig 2	BN / GN																												
4-port J-box 2 signals per port Multifast connector	4 A/port, 8 A total 19-pin Multifast connector 11 conductors. Mates with CKMV 19-11-*	<table> <tr> <th>Function</th><th>Pin / Color</th><th>Function</th><th>Pin / Color</th></tr> <tr> <td>+V</td><td>19 / BN</td><td>Port 2, Sig 1</td><td>5 / GN</td></tr> <tr> <td>-V</td><td>6 / BU</td><td>Port 2, Sig 2</td><td>4 / RD / BU</td></tr> <tr> <td>Ground</td><td>12 / GN/YE</td><td>Port 3, Sig 1</td><td>16 / YE</td></tr> <tr> <td>Port 1, Sig 1</td><td>15 / WH</td><td>Port 3, Sig 2</td><td>8 / WH / GN</td></tr> <tr> <td>Port 1, Sig 2</td><td>7 / GY/PK</td><td>Port 4, Sig 1</td><td>3 / GY</td></tr> <tr> <td></td><td></td><td>Port 4, Sig 2</td><td>14 / BN / GN</td></tr> </table>	Function	Pin / Color	Function	Pin / Color	+V	19 / BN	Port 2, Sig 1	5 / GN	-V	6 / BU	Port 2, Sig 2	4 / RD / BU	Ground	12 / GN/YE	Port 3, Sig 1	16 / YE	Port 1, Sig 1	15 / WH	Port 3, Sig 2	8 / WH / GN	Port 1, Sig 2	7 / GY/PK	Port 4, Sig 1	3 / GY			Port 4, Sig 2	14 / BN / GN	4MBV12-5P3-CSV19
Function	Pin / Color	Function	Pin / Color																												
+V	19 / BN	Port 2, Sig 1	5 / GN																												
-V	6 / BU	Port 2, Sig 2	4 / RD / BU																												
Ground	12 / GN/YE	Port 3, Sig 1	16 / YE																												
Port 1, Sig 1	15 / WH	Port 3, Sig 2	8 / WH / GN																												
Port 1, Sig 2	7 / GY/PK	Port 4, Sig 1	3 / GY																												
		Port 4, Sig 2	14 / BN / GN																												

* Cable length in meters.


We reserve the right to make technical alterations without prior notice.

Functional Wiring Diagrams

(PNP LED Version)
1 Signal per Port



(PNP LED Version)
2 Signals per Port




Multibox® Eurofast®, Junction Boxes, 4-Port Stainless Steel Connector Options

Specifications

Housing:	Nylon	Temperature:	-30 °C to +80 °C (-22 °F to +176 °F)
Connectors:	Eurofast: Nylon or TPU	Protection:	IEC IP67
Contacts:	Gold plated brass	Accessories:	(2) VZ 3 closure caps and a VZ 1 label kit (8 labels) included
Thread Inserts:	Stainless steel	Cable Length:	Standard length is nominal 5 meters. Other lengths available by request - Consult factory
Cable:	See table		
Recommended Splitter:	YB2-FSM 4.5-2 FKM 4.5		

Dimensions

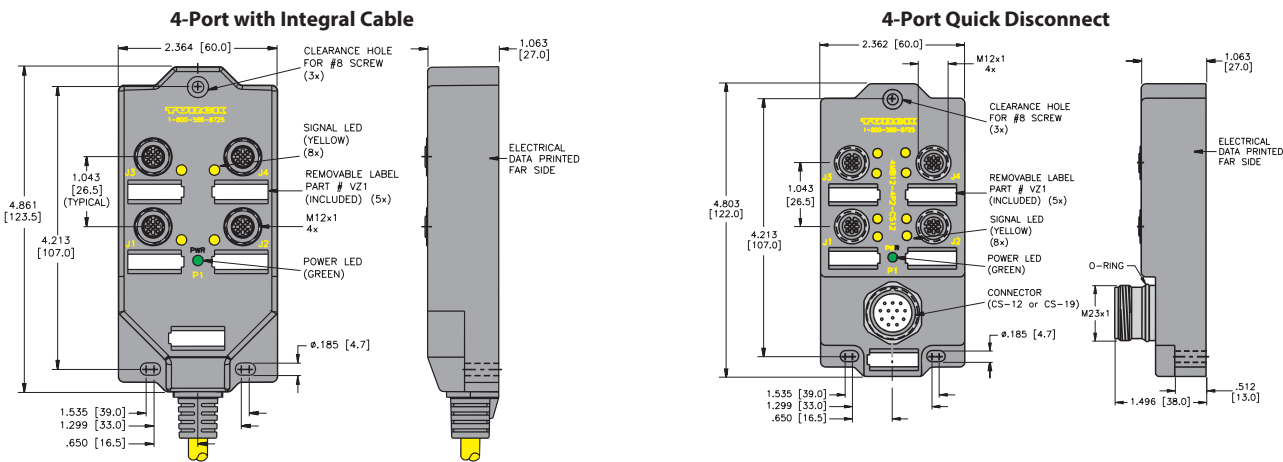

We reserve the right to make technical alterations without prior notice.

multibox®, eurofast®

Pinout

5-Pin Eurofast	12-Pin Multifast®	19-Pin Multifast
Female	Male	Male