


## FEMALE END VIEW




1 = GREEN/YELLOW  
2 = BLACK  
3 = WHITE

 **minipin**  
**fast**

## SPECIFICATIONS

CONTACT CARRIER MATERIAL	TPU
MOLDED HEAD MATERIAL/COLOR	TPU/BLUE-GRAY
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
RATED CURRENT [A]	10.0 A
RATED VOLTAGE [V]	600 V
OUTER JACKET MATERIAL/COLOR	PVC/GRAY
CONDUCTORS	3x16 AWG
CONDUCTOR INSULATION MATERIAL	PVC
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	NEMA 1,3,4,4X,6P,12 & IEC IP67, IP68, IP69, IP69K

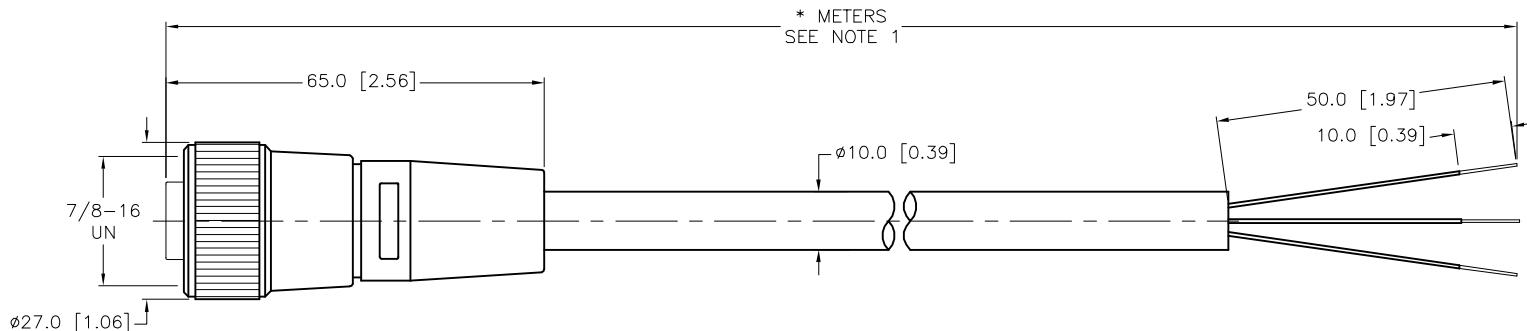

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

\* UNLESS OTHERWISE SPECIFIED

## NOTES:

1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. "/S732" DESIGNATES GRAY CABLE W/BLUE/GREY MOLD.

## RELATED DOCUMENTS

1.  
2.  
3.  
4.

## 3RD ANGLE PROJECTION



THIS DRAWING IS  
CONFIDENTIAL AND THE  
PROPERTY OF TURCK  
INC. USE OF THIS  
DOCUMENT WITHOUT  
WRITTEN PERMISSION IS  
PROHIBITED.

MATERIAL  
SEE SPECIFICATIONS

## FINISH

DRFT JBJ DATE 07/06/00  
APVD SCALE 1=1.3

UNIT OF MEASUREMENT  
MILLIMETER [ INCH ]

DO NOT SCALE THIS DRAWING

3000 CAMPUS DRIVE  
MINNEAPOLIS, MN 55441  
1-800-544-7769  
(763) 553-7300  
(763) 553-0708 fax  
www.turck.us

**TURCK**

RKV 36D-\*M/S732

DESCRIPTION

IDENTIFICATION NO.

REV

F

F	UPDATE PROTECTION CLASS	CBM	04/13/21	76628
REV	DESCRIPTION	BY	DATE	ECO NO.

FILE: 777000890

SHEET 1 OF 1