



## FEMALE END VIEW




1 = BLACK  
2 = GREEN  
3 = RED  
4 = WHITE



## PANEL CUTOUT





## LOCKNUT

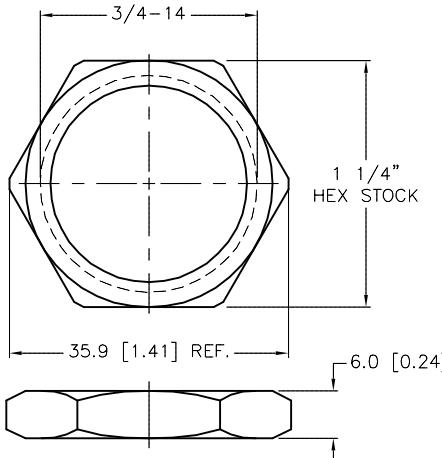

## SPECIFICATIONS

CONTACT CARRIER MATERIAL	PVC
CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
GASKET MATERIAL	NITRILE (BUNA-N)
RATED CURRENT [A]	15 A
RATED VOLTAGE [V]	600 V
CONDUCTOR INSULATION MATERIAL	PVC
NUMBERS OF CONDUCTORS [AWG]	4x14 AWG
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K
MAXIMUM PANEL THICKNESS	6.0mm [.236]

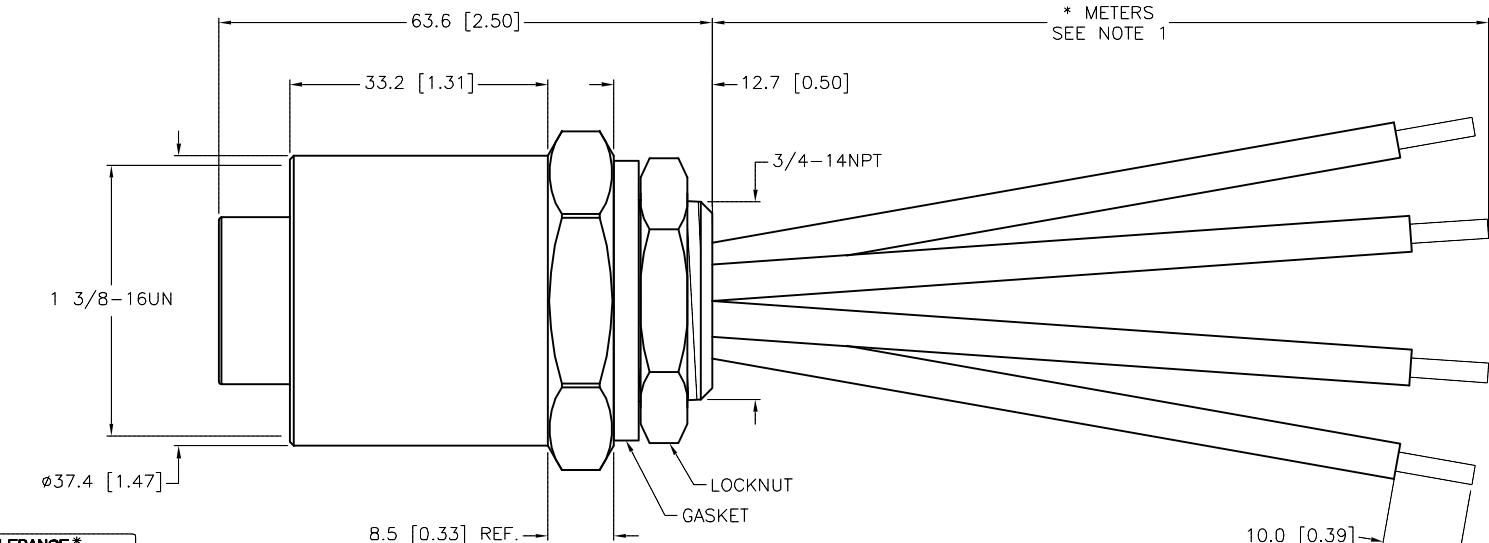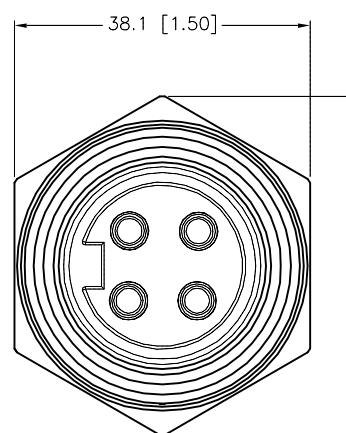

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

\* UNLESS OTHERWISE SPECIFIED

## NOTES:


1. "\*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.



## RELATED DOCUMENTS

- 1.
- 2.
- 3.
- 4.

## 3RD ANGLE PROJECTION



THIS DRAWING IS  
CONFIDENTIAL AND THE  
PROPERTY OF TURCK  
INC. USE OF THIS  
DOCUMENT WITHOUT  
WRITTEN PERMISSION IS  
PROHIBITED.

**TURCK INC**  
High Technology Sensors and Automation Controls

3000 CAMPUS DRIVE  
MINNEAPOLIS, MN 55441

1-800-544-7769

(763) 553-7300

(763) 553-0708 fax

turck.com

## MATERIAL

SEE SPECIFICATIONS

## FINISH

SEE SPECIFICATIONS

ALL DIMENSIONS  
DISPLAYED ON THIS  
DRAWING ARE FOR  
REFERENCE ONLY

CONTACT TURCK  
FOR MORE  
INFORMATION

DRFT

RDS

APVD

SCALE

1=1.0

## UNIT OF MEASUREMENT

**MILLIMETER [ INCH ]**

DO NOT SCALE THIS DRAWING

DATE

02/04/09

DESCRIPTION

GKDFV 44-\*M/14.75/NPT

IDENTIFICATION NO.

FILE: 777020537

REV

C