



## MALE END VIEW



1 = BLACK  
2 = GREEN  
3 = RED  
4 = WHITE

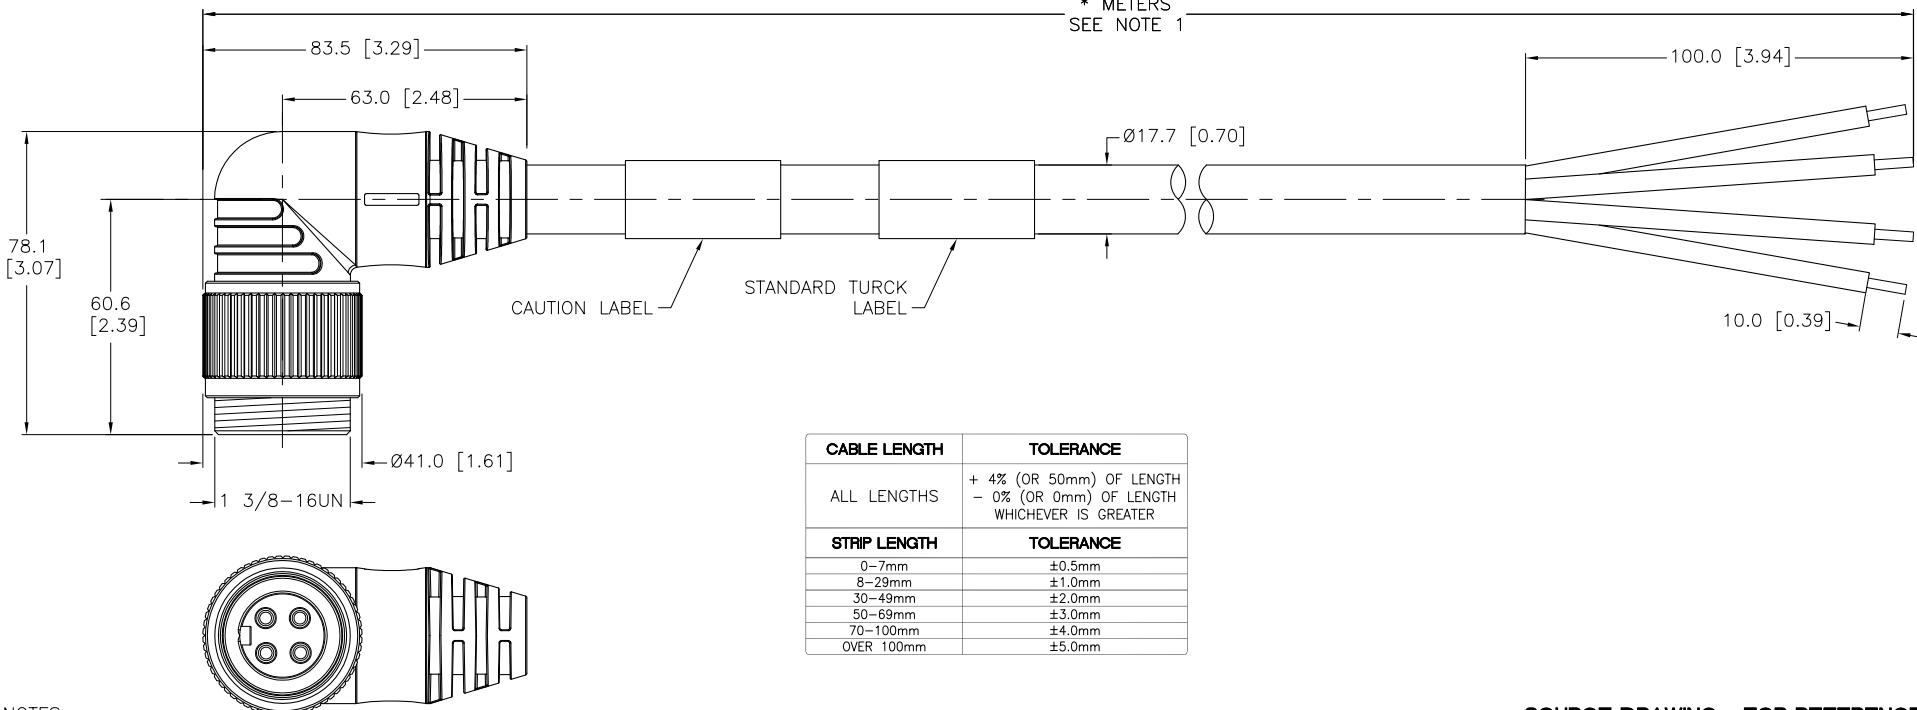

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

## NOTES:

1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. STRIP AND TIN LENGTHS ARE FOR REFERENCE ONLY; SOME LENGTHS MAY NOT BE STRIPPED AND TINNED.

**CAUTION:**

RISK OF ELECTRICAL SHOCK  
DO NOT DISCONNECT UNDER LOAD

## SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	PVC/BLACK
MOLDED MATERIAL/COLOR	PVC/BLACK
CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
HOUSING MATERIAL/FINISH	ALUMINUM/CLEAR-ANODIZED
RATED CURRENT [A]	20 A
RATED VOLTAGE [V]	600 V
CABLE JACKET MATERIAL/COLOR	TPE/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
NUMBERS OF CONDUCTORS [AWG]	4x12 AWG
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K

## SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	DESCRIPTION	
			DRFT	RDS
1.			DATE	12/18/08
2.			DSGN	SCALE 1=2.0
3.				UNIT OF MEASUREMENT
4.				MILLIMETER [ INCH ]
				DO NOT SCALE THIS DRAWING
				IDENTIFICATION NO. <span style="float: right;">REV B</span>
				FILE: 777023434
				SHEET 1 OF 1

B UPDATE CABLE JACKET MATERIAL CBM 10/19/11 36867

REV DESCRIPTION BY DATE ECO NO.