




## MALE END VIEW

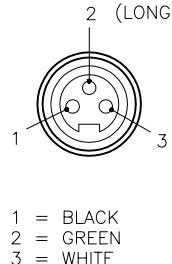

## PANEL CUTOUT


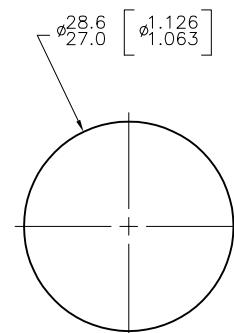


## LOCKNUT

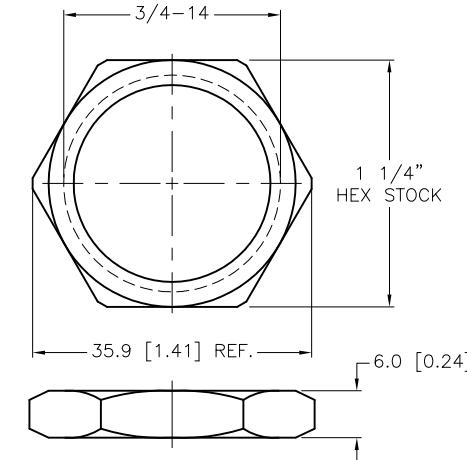

## SPECIFICATIONS

CONTACT CARRIER MATERIAL	PVC
CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
HOUSING MATERIAL/FINISH	ALUMINUM/CLEAR-ANODIZED
GASKET MATERIAL	NITRILE (BUNA-N)
RATED CURRENT [A]	30 A
RATED VOLTAGE [V]	600 V
CONDUCTOR INSULATION MATERIAL	PVC
NUMBERS OF CONDUCTORS [AWG]	3x10 AWG
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K
MAXIMUM PANEL THICKNESS	6.0mm [.236]

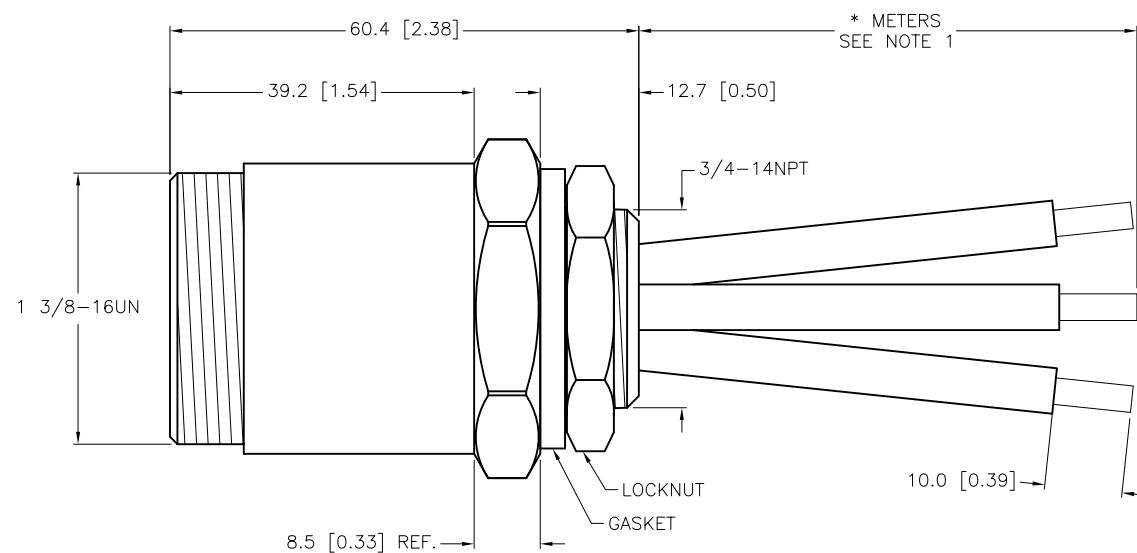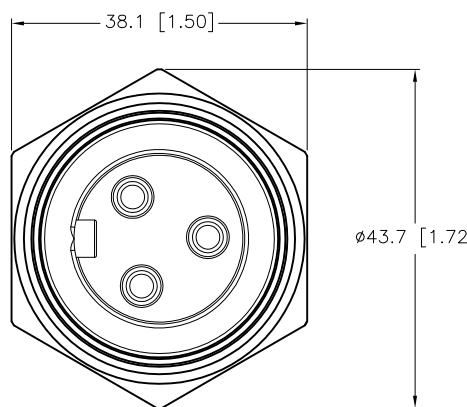

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

\* UNLESS OTHERWISE SPECIFIED

## NOTES:


1. "\*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.



## RELATED DOCUMENTS

- 1.
- 2.
- 3.
- 4.

## 3RD ANGLE PROJECTION

THIS DRAWING IS  
CONFIDENTIAL AND THE  
PROPERTY OF TURCK  
INC. USE OF THIS  
DOCUMENT WITHOUT  
WRITTEN PERMISSION IS  
PROHIBITED.

MATERIAL  
SEE SPECIFICATIONS

FINISH  
SEE SPECIFICATIONS

DRFT RDS  
APVD

SCALE 1=1.0

UNIT OF MEASUREMENT  
MILLIMETER [ INCH ]

DO NOT SCALE THIS DRAWING

**TURCK INC**  
High Technology Sensors and Automation Controls

3000 CAMPUS DRIVE  
MINNEAPOLIS, MN 55441  
1-800-544-7769  
(763) 553-7300  
(763) 553-0708 fax  
turck.com

DESCRIPTION  
GSDFA 30-\*M/14.75/NPT

IDENTIFICATION NO.

REV  
B

FILE: 777023458

SHEET 1 OF 1