


| SPECIFICATIONS | |
|-------------------------------|---|
| CONTACT CARRIER MATERIAL | PVC |
| MOLDED HEAD MATERIAL/COLOR | PVC/BLACK |
| CONTACT MATERIAL/PLATING | BRASS/GOLD |
| COUPLING NUT MATERIAL/PLATING | BRASS/NICKEL |
| RATED CURRENT [A] | 21.0 A |
| RATED VOLTAGE [V] | 600 V |
| OUTER JACKET MATERIAL/COLOR | TPE/BLACK |
| CONDUCTOR INSULATION MATERIAL | PVC |
| NUMBER OF CONDUCTORS [AWG] | 3x14 AWG |
| TEMPERATURE RATING | -40°C to +90°C (-40°F to +194°F) |
| PROTECTION CLASS | NEMA 1,3,4,6P,12 & IECIP67, IP68,IP69,IP69K |
| APPROVALS AND CERTIFICATIONS | UL 2237; CE |

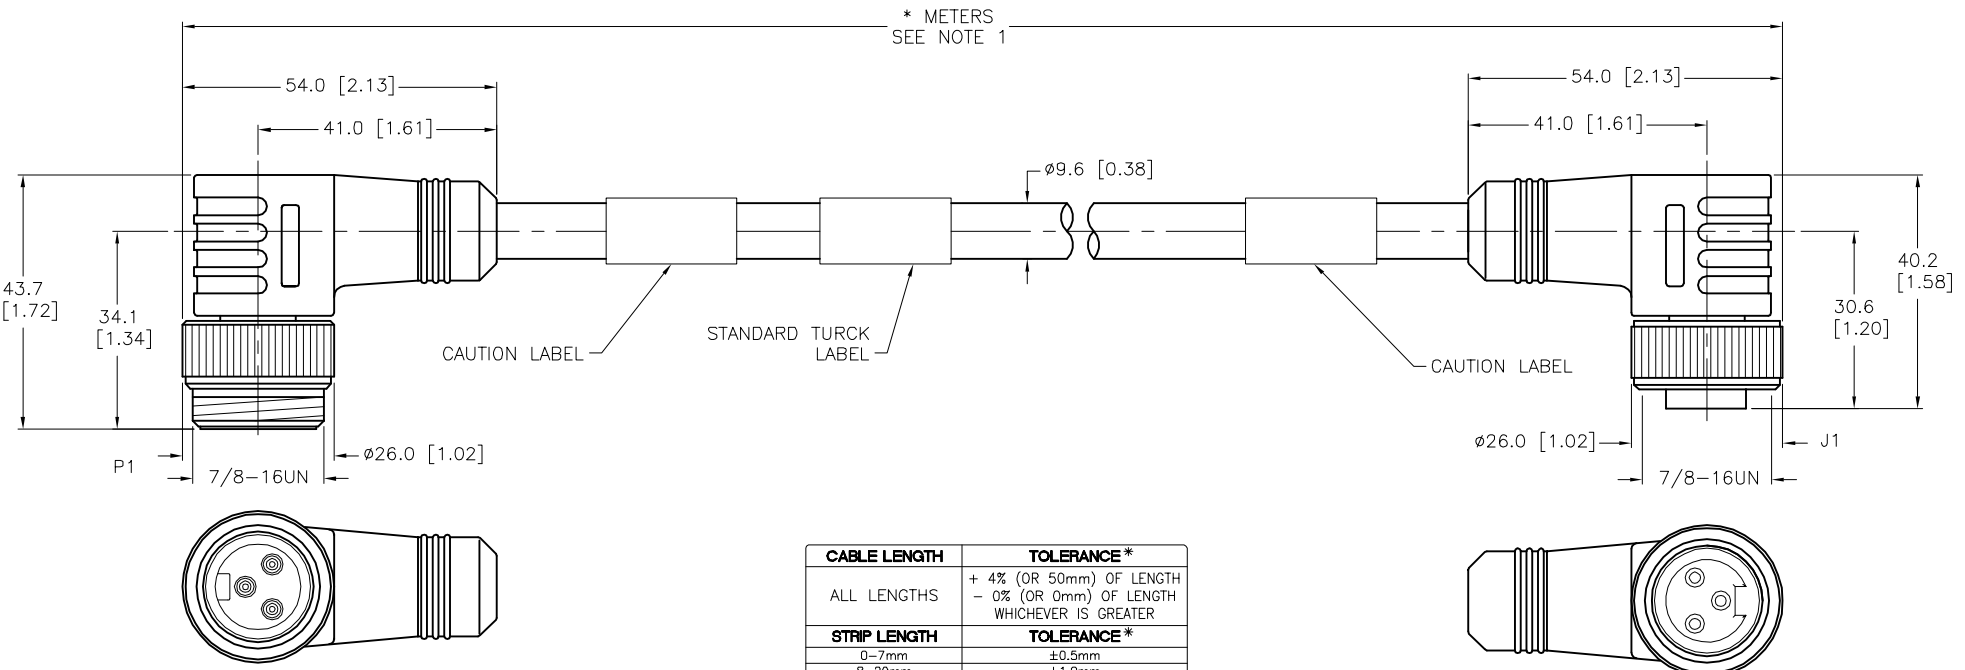


| CABLE LENGTH | TOLERANCE* |
|--------------|---|
| ALL LENGTHS | + 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER |
| STRIP LENGTH | TOLERANCE* |
| 0-7mm | ±0.5mm |
| 8-29mm | ±1.0mm |
| 30-49mm | ±2.0mm |
| 50-69mm | ±3.0mm |
| 70-100mm | ±4.0mm |
| OVER 100mm | ±5.0mm |

* UNLESS OTHERWISE SPECIFIED

- NOTES:
- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
 - "/S4000" DESIGNATES TC-ER CABLE.

CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

| | | | |
|---|---|--|--|
| RELATED DOCUMENTS 1. RJP 2. 3. 4. | 3RD ANGLE PROJECTION  | THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. | 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us |
| MATERIAL SEE SPECIFICATIONS | ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY | DRFT CK APVD | DATE 01/17/11 SCALE 1=1.3 |
| FINISH SEE SPECIFICATIONS | CONTACT TURCK FOR MORE INFORMATION | DESCRIPTION WSM WKM 34-*M/S4000 | |
| DO NOT SCALE THIS DRAWING | | UNIT OF MEASUREMENT MILLIMETER [INCH] | IDENTIFICATION NO. REV L |
| L UPDATE PROTECTION CLASS | CBM 04/13/21 76628 | FILE: 777027171 | SHEET 1 OF 1 |
| REV DESCRIPTION | BY DATE ECO NO. | | |