


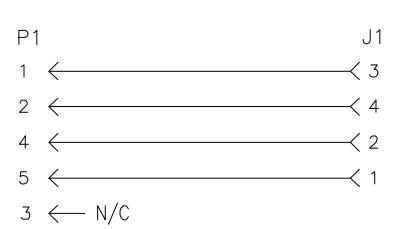


MALE END VIEW	FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
 <p>1 = BLUE (GND) 2 = BLACK (GND) 3 = N/C 4 = WHITE (<math>V_I+</math>) 5 = BROWN (<math>V_o+</math>)</p>	 <p>1 = BROWN (<math>V_o+</math>) 2 = WHITE (<math>V_I+</math>) 3 = BLUE (GND) 4 = BLACK (GND)</p>		CONTACT CARRIER MATERIAL	TPU
			MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	9.0 A
			RATED VOLTAGE [V]	600 V
			OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
			NUMBER OF CONDUCTORS [AWG]	4x18 AWG
			CONDUCTOR INSULATION MATERIAL	PVC
			TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
			PROTECTION CLASS	NEMA 1,3,4,6P,12 & IECIP67, IP68,IP69,IP69K

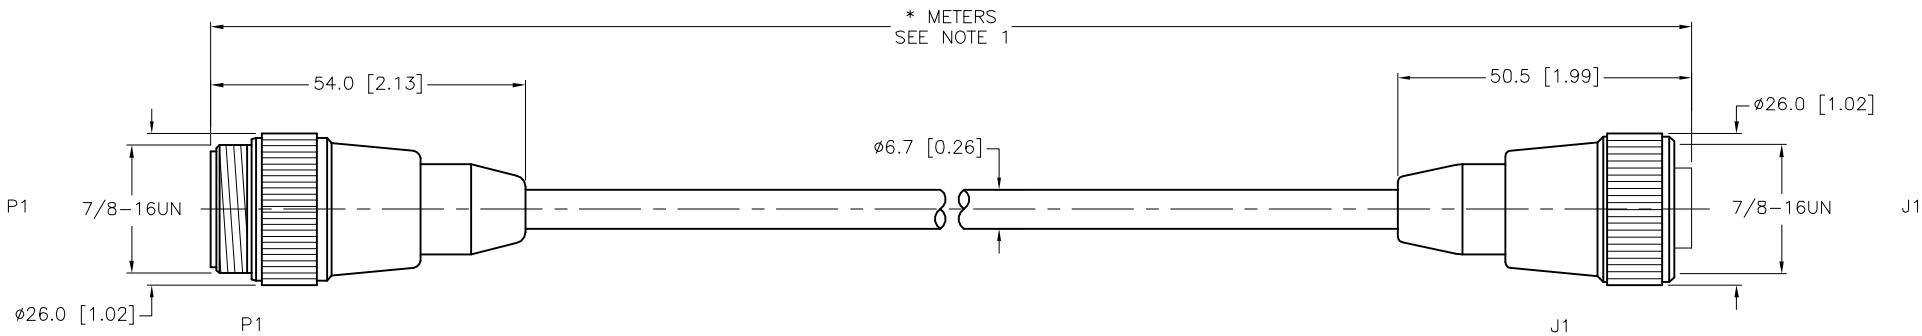

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

\* UNLESS OTHERWISE SPECIFIED

NOTES:

1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
			DRFT	CK
			APVD	DATE 03/10/11 SCALE 1=1.3
		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT	MILLIMETER [ INCH ]
			CONTACT TURCK FOR MORE INFORMATION	IDENTIFICATION NO. REV C
			SEE SPECIFICATIONS	DO NOT SCALE THIS DRAWING FILE: 777027400 SHEET 1 OF 1