


8, 10 and 12-Wire *euofast*® Receptacles, Front Mount, 1/2-14 NPSM Threads

- Male Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 68 Protection



Receptacles


| Drawing Number | Part Number   | Lead Specs.   | Application                | Pinout   |
|----------------|---------------|---|----------------------------|--|
| <p>FS ..</p>   | FS 8-*/14.5   | UL, CSA<br>8x24 AWG<br>105°C<br>60 VAC/75 VDC<br>2 A  | Mates with 8-pin Cordsets  | <ol style="list-style-type: none"> <li>WH</li> <li>BN</li> <li>GN</li> <li>YE</li> <li>GY</li> <li>PK</li> <li>BU</li> <li>RD</li> </ol>   |
|                | FS 8.6-*/14.5 | UL, CSA<br>6x24 AWG<br>105°C<br>60 VAC/75 VDC<br>2 A  | Mates with 8-pin Cordsets  | <ol style="list-style-type: none"> <li>WH</li> <li>GN</li> <li>YE</li> <li>GY</li> <li>GN</li> <li>N/C</li> <li>BU</li> <li>N/C</li> </ol>   |
|                | FS 10-*/14.5  | UL, CSA<br>10x24 AWG<br>105°C<br>60 VAC/75 VDC<br>2 A | Mates with 10-pin Cordsets | <ol style="list-style-type: none"> <li>WH</li> <li>BN</li> <li>GN</li> <li>YE</li> <li>GY</li> <li>PK</li> <li>BU</li> <li>RD</li> <li>OG</li> <li>TN</li> </ol>                         |
|                | FS 12-*/14.5  | UL, CSA<br>12x24 AWG<br>105°C<br>60 VAC/75 VDC<br>2 A | Mates with 12-pin Cordsets | <ol style="list-style-type: none"> <li>WH</li> <li>BN</li> <li>GN</li> <li>YE</li> <li>GY</li> <li>PK</li> <li>BU</li> <li>RD</li> <li>OG</li> <li>TN</li> <li>BK</li> <li>VT</li> </ol> |

See page B109 for dimensional drawings.

\* Length in meters. Standard lead length is 0.5 Meters. Consult factory for other lengths.  
Standard housing material is nickel plated brass "FS."; "FSV.." indicates 316 stainless steel.  
To specify PVC jacketed cable, add "/S717" to the end of the part number.


**eurofast® Receptacles**

1

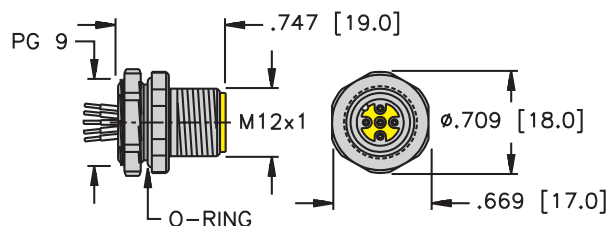


**FS ..\*** Pages B117 - B118

2

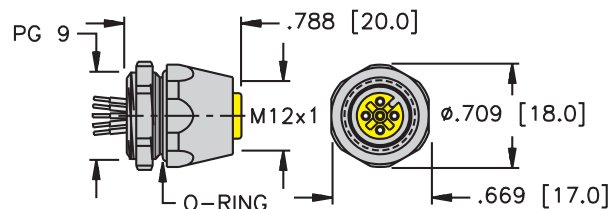


**FK ..\*** Pages B119 - B120

3

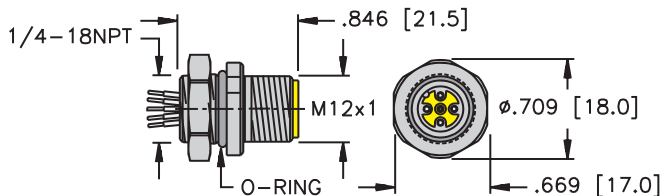


**FS ..18.25** Pages B121 - B122

4

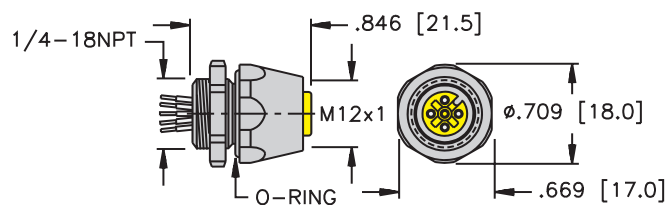


**FK ..\*/18.25** Pages B123 - B124

5

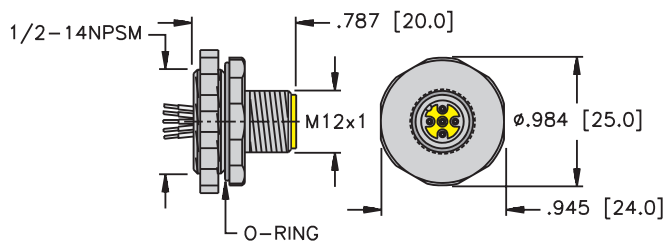


**FS .. 14.5** Pages B125 - B126 & B151

6

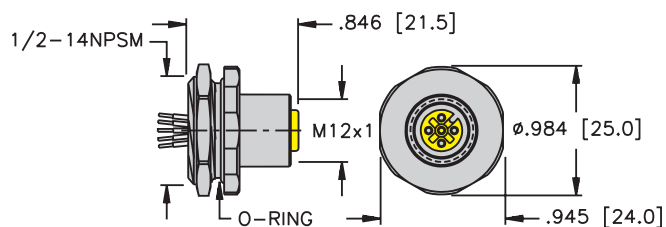


**FK ..14.5** Page B127

7

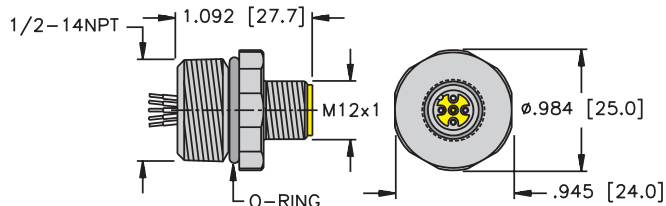

**FS ..14.5/NPT** Pages B128 - B129

8

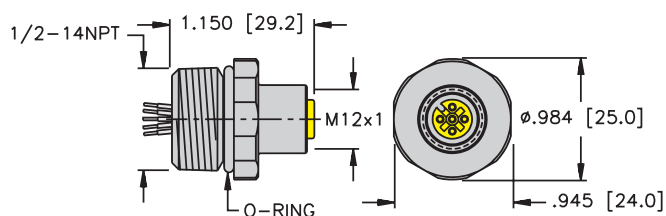

**FK .. 14.5/NPT** Page B130