


6, 8, 10 and 12-Wire M12 eurofast® Receptacles, Front Mount

- Male Receptacles
- NEMA 1, 3, 4, 6P
- IEC IP 68 Protection



Drawing Number	Part Number	Lead Specs.	Application	Pinout
<p>FS ..</p>	FS 4.6-*	UL, CSA 6x22 AWG 105°C 250 V 4 A	Mates with 6-pin Cordsets	1. BN 2. WH 3. BU 4. BK 5. GY 6. PK
	FS 6-*	UL, CSA 6x24 AWG 105°C 60 VAC/75 VDC 2 A	Mates with 6-pin Cordsets	1. BN 2. WH 3. BU 4. BK 5. GY 6. PK
	FS 8-*	UL, CSA 8x24 AWG 105°C 60 VAC/75 VDC 2 A	Mates with 8-pin Cordsets	1. WH 2. BN 3. GN 4. YE 5. GY 6. PK 7. BU 8. RD
	FS 8.6-*	UL, CSA 6x24 AWG 105°C 60 VAC/75 VDC 2 A	Mates with 8-pin Cordsets	1. WH 5. BN 2. GN 6. N/C 3. YE 7. BU 4. GY 8. N/C
	FS 10-*	UL, CSA 10x24 AWG 105°C 60 VAC/75 VDC 2 A	Mates with 10-pin Cordsets	1. WH 6. PK 2. BN 7. BU 3. GN 8. RD 4. YE 9. OG 5. GY 10. TN
	FS 12-*	UL, CSA 12x24 AWG 105°C 60 VAC/75 VDC 2 A	Mates with 12-pin Cordsets	1. WH 7. BU 2. BN 8. RD 3. GN 9. OG 4. YE 10. TN 5. GY 11. BK 6. PK 12. VT


Receptacles

See page D113 for dimensional drawings.

* Length in meters. Standard lead length is 0.5 Meters. Consult factory for other lengths. Standard housing material is nickel plated brass "FS.."; "FSV.." indicates 316 stainless steel. To specify PVC jacketed cable, add "/S717" to the end of the part number.

M12 eurofast® Receptacles


1

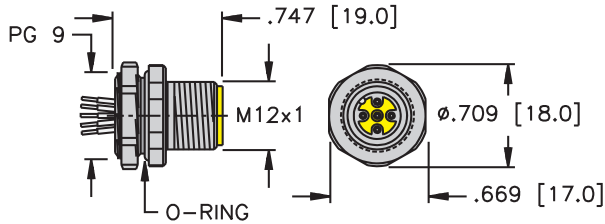

Typical panel cutout is 15.2 mm.

FS ..* Pages D121 - D122


2

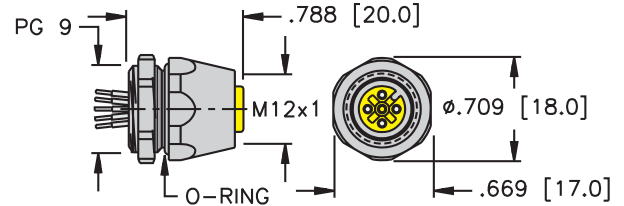

Typical panel cutout is 15.2 mm.

FK ..* Pages D123 - D124


3

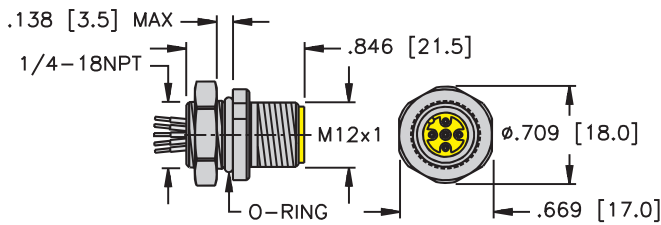

Typical panel cutout is 14.3 mm.

FS ..18.25 Pages D125 - D126


4

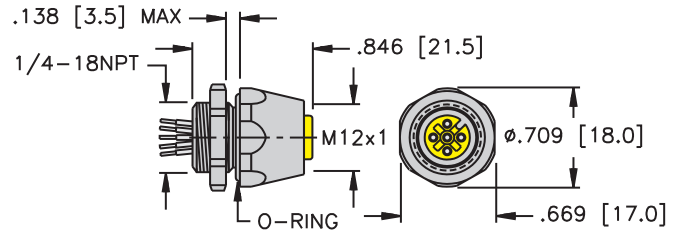

Typical panel cutout is 14.3 mm.

FK ..*/18.25 Pages D127 - D128


5

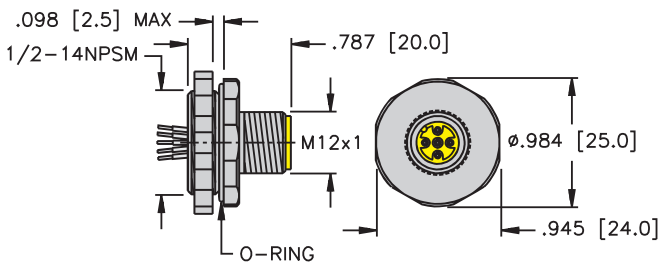

Typical panel cutout is 22.5 mm.

FS .. 14.5 Pages D129 - D130


6

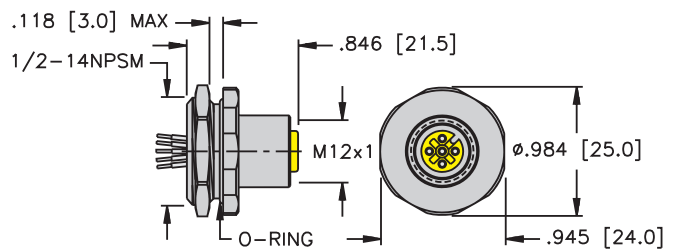

Typical panel cutout is 22.5 mm.

FK ..14.5 Page D131


7

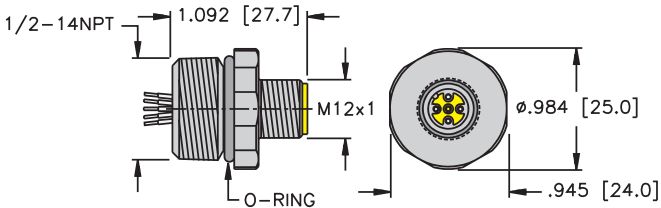

Typical panel cutout is 22.5 mm.

FSW ..14.5/NPT Pages D132 - D133

8

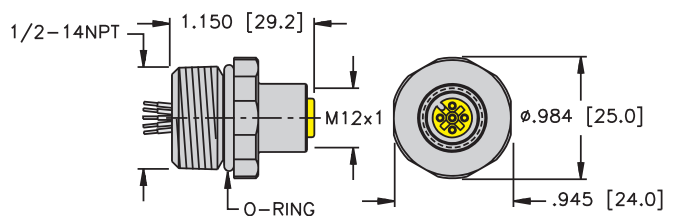

Typical panel cutout is 22.5 mm.

FK .. 14.5/NPT Page D134