







TURCK

Network Media Products

DeviceNet™, (M12x1) eurofast® Female Receptacles

- Mounted for Quick Connection to Enclosures
- Available for 1/2-14NPT, 1/2-14NPSM, 3/4-14NPT and M20 Threads



Housing	Part Number	Specs	Application	Pinouts	
38 	FK 57-*M/14.5	Nickel Plated CuZn or Stainless Steel 250 V, 4 A -40° to +105°C	1/2-14NPT full length threads	1. GY 2. RD 3. BK 4. WH 5. BU	Female 
40 	FK 57-*M/14.75		3/4-14NPT full length threads		
39 	FK 57-*M/M20		M20x1.5 threads		
41 	FK 57-*M		PG 9 threads		
42 	FK 57-*M/NPT		1/2-14NPT modified length threads		

See page G72 for dimensional drawings.

* Length in meters.


Standard cable length is 0.3 meters. Consult factory for other lengths.

Receptacles require a 13/16" (21.0 mm) clearance hole for panel mounting.

Standard housing material is nickel plated brass. "RKF .."; "RKfV .." indicates 316 stainless steel housing.

euromast® Female Receptacles


38

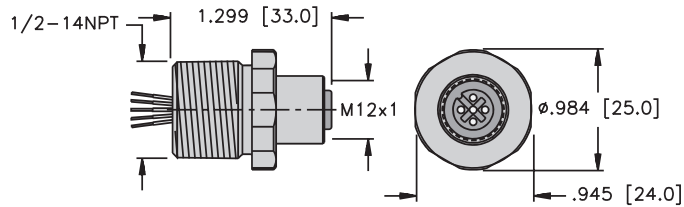

FK .. 14.5

Page G65


40

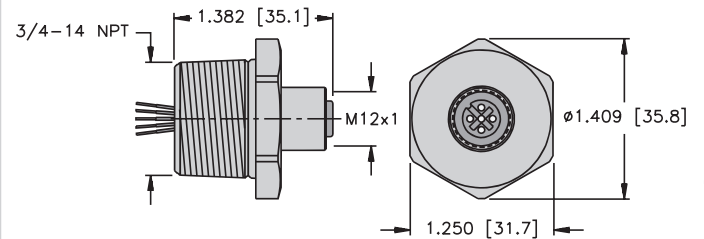

FK .. 14.75

Page G65


39

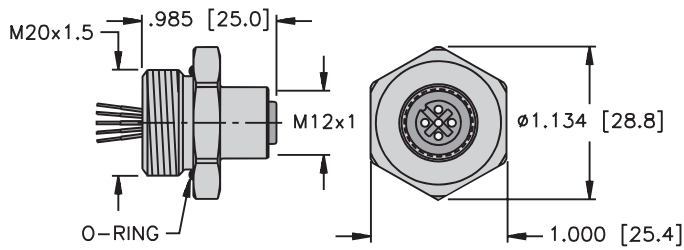

FK .. M20

Page G65


41

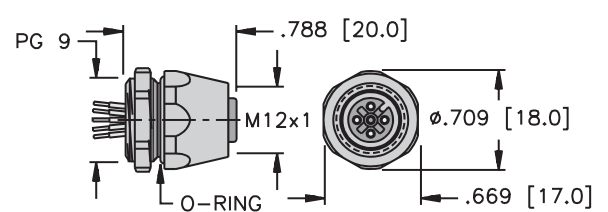

FK ..

Page G65

42

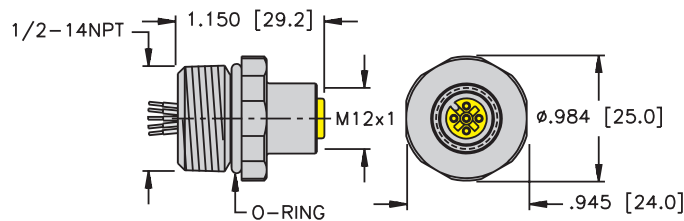

FK .. NPT

Page G65