

# TURCK

## Network Media Products

### FOUNDATION™ fieldbus, (M12x1) eurofast® Female Receptacles

- Mounted for Quick Connection to Enclosures
- Available for 1/2-14NPT, 1/2-14NPSM, 3/4-14NPT and M20 Threads



Housing	Part Number	Specs	Application	Pinouts
<p>28</p>	FKV 49-*M/14.5	Nickel Plated CuZn or Stainless Steel 250 V, 4 A -40° to +105°C	1/2-14NPT Full Length Threads	<p><b>Female</b></p>
<p>30</p>	FKV 49-*M/14.75		3/4-14NPT Full Length Threads	
<p>29</p>	FKV 49-*M/M20		M20x1.5 Threads	
<p>31</p>	FKV 49-*M		PG 9 Threads	
<p>32</p>	FKV 49-*M/NPT		1/2-14NPT Modified Length Threads	


See page R65 for dimensional drawings.

Standard cable length is 0.3 meters. Consult factory for other lengths.

Receptacles require a 13/16" (21.0 mm) clearance hole for panel mounting.

Standard housing material is stainless steel. "RKF .."; "RKFV .." indicates 316 nickel plated brass housing.


28

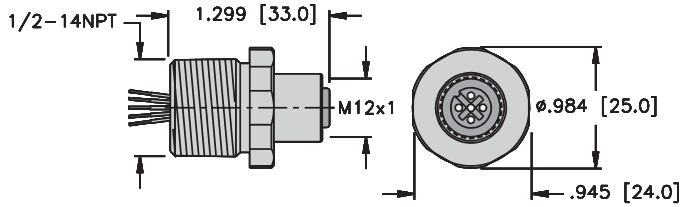

FKV .. 14.5

Page R61


30

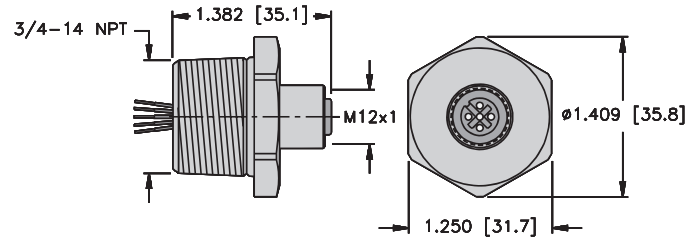

FKV .. 14.75

Page R61


29

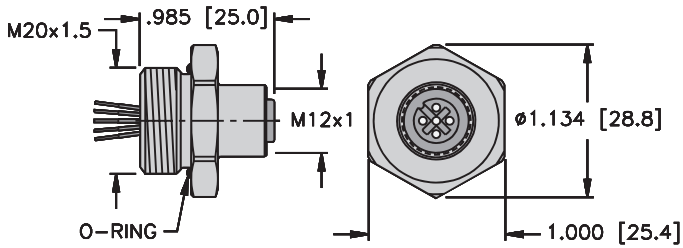

FKV .. M20

Page R61


31

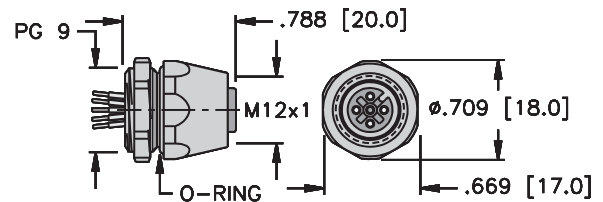

FKV ..

Page R61

32

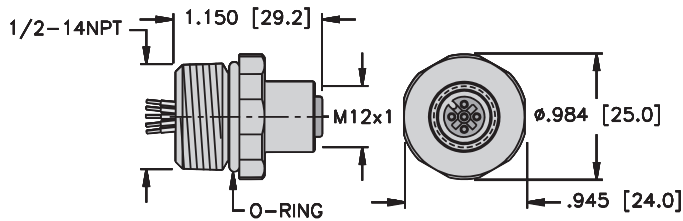

FKV .. NPT

Page R61