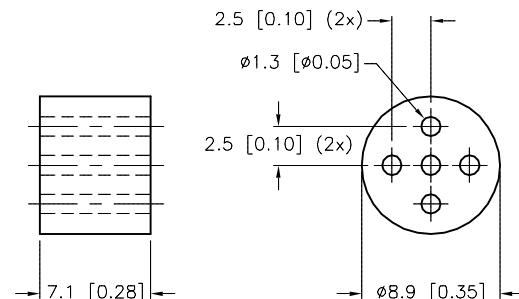



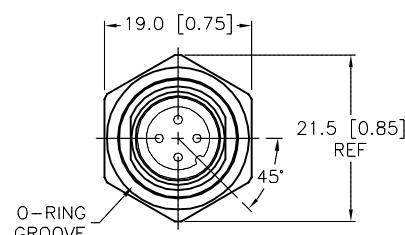
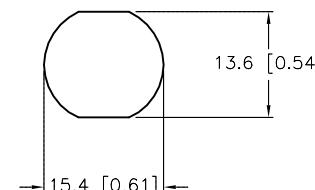
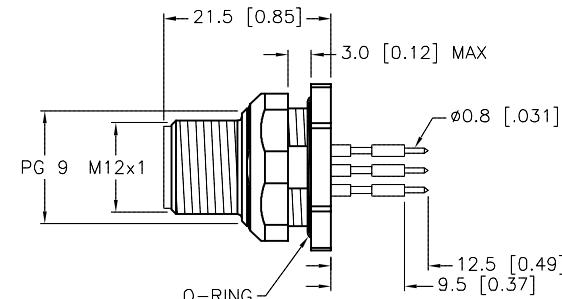
MALE END VIEW

PCB LAYOUT AND PIN SUPPORT

FOUNDATION™
fieldbus

SPECIFICATIONS

CONTACT CARRIER MATERIAL	NYLON or TPU
CONTACT MATERIAL/PLATING	BRASS/GOLD
HOUSING/LOCKNUT MATERIAL/PLATING	BRASS/NICKEL
O-RING MATERIAL	NITRILE
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	250 V
NUMBER OF CONDUCTORS [AWG]	PRINTED CIRCUIT PINS
TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68

END VIEW
LOCKNUT NOT SHOWN

MOUNTING HOLE

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	TURCK INC High Technology Sensors and Automation Controls	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com
1. U9040 2. 3. 4.				
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT JBJ DATE 3/8/99	DESCRIPTION	FSFD 49-PCB
FINISH	CONTACT TURCK FOR MORE INFORMATION	APVD SCALE 1=1.0		
		UNIT OF MEASUREMENT MILLIMETER [INCH]	IDENTIFICATION NO. U4504-72	REV H
		DO NOT SCALE THIS DRAWING	FILE: U4504-72	SHEET 1 OF 1

H UPDATE SIDE VIEW TO SHOW NEW CTA RDS 08/21/13 43122

REV DESCRIPTION BY DATE ECO NO.